






REV.	ECN NO. OR PDR NO.	DESCRIPTION	REVISED BY	DATE
A	PDR NO.:	T09012015M~0	Steve	2009.01.08
B	ECN NO.:	S120108	Shawn	2012.01.06



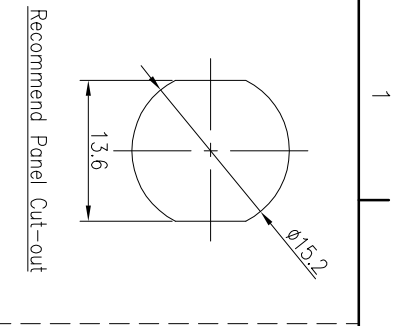


- NOTES:
1. WATERPROOF RATE: IP68
IP68: IMMERSED IN 1M WATER FOR 24 HOURS
 2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -40°C TO +100°C
RATING: 60V AC/DC 5A
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 3. SPECIFICATIONS: SEE "M12 SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **Gr. Pass**
 6. FOR PANEL THICKNESS MAX OF 4.5mm
 7. ORDER INFORMATION: 2MT3003-W0X300

- 3- 3 PIN
- 4- 4 PIN
- 5- 5 PIN



P/N:	2MT3003-W05300	2MT3003-W04300	2MT3003-W03300
------	----------------	----------------	----------------

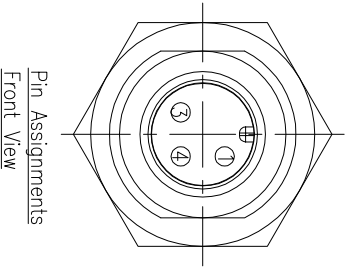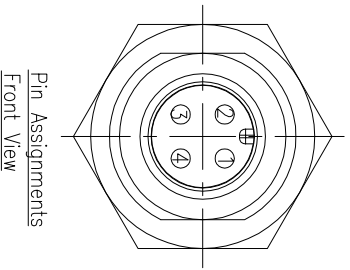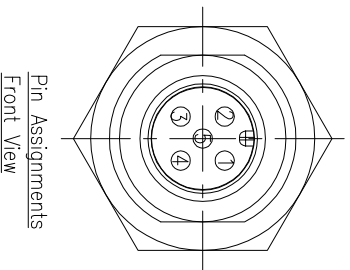

F	LIQUID GLUE	1	N/A	BLACK
E	SHIELD	1	BRASS	NICKEL PLATING 100u"
D	NUT	1	BRASS	NICKEL PLATING 100u"
C	O-RING	1	EPDM	BLACK
B	MALE PIN	*	BRASS	6u" GOLD PLATED OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X : ±0.5 X : ±2°
X.X : ±0.3 X.X : ±1°
X.XX : ±0.2

TITLE: M12 SERIES FRONT MOUNT MALE CONN. (3~5PIN) HEXAGONAL BACKSHELL

DWN: Shawn PART NO. 2MT3003-W0X300

CHKD: Harden SCALE 2:1 UNIT: mm

APVD: Tony SIZE: A3 SHEET: 1 OF 1 REV: B

Singatron Enterprise Co., Ltd.
信普企業股份有限公司

CUSTOMER COPY