



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.: T140729-6A	Vicky	2015.01.09

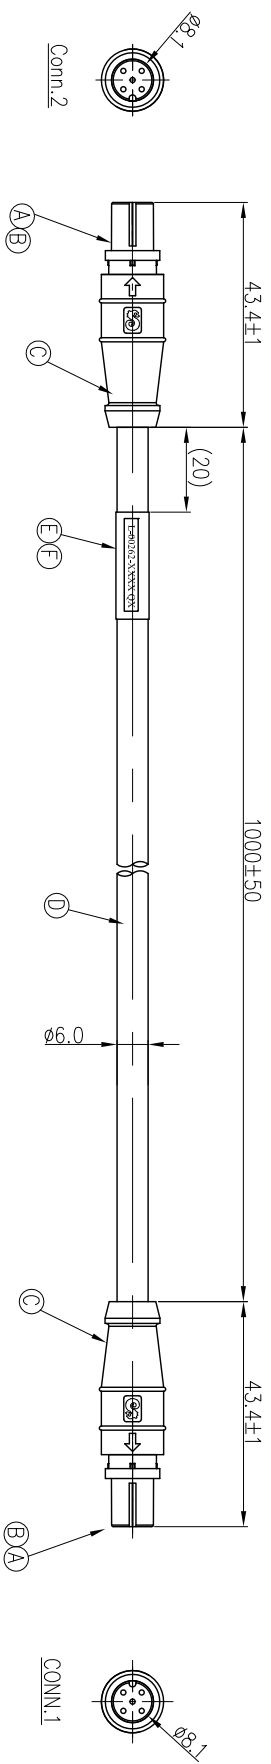


5	GREEN	3
4	BLUE	4
3	GREEN/WHITE	5
2	ORANGE	1
1	ORANGE/WHITE	2
CONN.1	WIRE COLOR	CONN.2
PIN OUT		



Pin Assignments
Front View

CONN.1&CONN.2

- NOTES:
1. CURRENT RATING: 5A
 2. TEMPERATURE RANGE: -40°C TO +90°C
 3. SPECIFICATIONS: SEE "M12 SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**



LABEL

F	HEAT SHRINK TUBE	1	125° 300V L=35	TRANSPARENT
E	LABEL	1	L30 W8	GREEN
D	CABLE	1	CAT5E SFTP 24#*4P+D Al/MY(-40~105°) (UV Resistant)	BLACK (PVC JACKET)
C	OVER MOLD	2	PVC	BLACK
B	FEMALE PIN	10	BRASS	6u" GOLD PLATED OVER NICKEL PLATING
A	BODY	2	NYLON+30%GF 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1'	
X.XX	:±0.2			
TITLE M12 SERIES 180° SPIN FEMALE CONN.				
Singatron Enterprise Co., Ltd. 信譽企業股份有限公司				
DWN	Vicky	PART NO.	2MT3010-W05335H	
CHKD	Harten	SCALE	2:1	UNIT: mm
APVD	Steve	SIZE: A3	SHEET: 1 OF 1	REV: A
CUSTOMER COPY				