



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	DCN NO.:T140515-7A-001-C	Lx-Wu	2014.09.09	

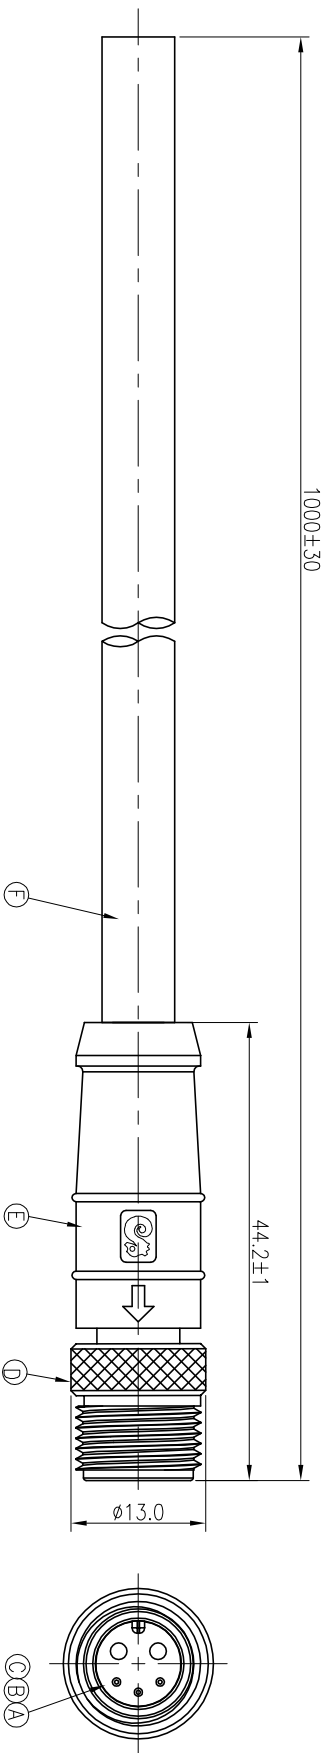

Conn.

YELLOW(24AWG)	3
BLACK(16AWG)	2
RED(16AWG)	1
WIRE COLOR	CONN.
PIN OUT	



NOTES:

1. WATERPROOF RATE: IP65
2. CURRENT RATING: 10+2A
3. SPECIFICATIONS:SEE "M12 SERIES SPECIFICATIONS".
4. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: 

F	CABLE	1	UL2464 16AWG*2C+24AWG*1C+AL OD6.0	BLACK
E	OVER MOLD	1	TPU	BLACK
D	SCREW NUT	1	COPPER ALLOY	NICKEL PLATING 100u"
C	MALE PIN	2	COPPER ALLOY	1~3u" GOLD PLATING OVER NICKEL PLATING
B	MALE PIN	3	COPPER ALLOY	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	TPU	BLACK
UNLESS OTHERWISE SPECIFIED TOLERANCES		SINGATRON ENTERPRISE CO., LTD. 信晉企業股份有限公司		
DECIMALS:		ANGLES:		
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			

TITLE		M12 SERIES MALE CONN. MALE ( 2+3) PIN 180°	
DMN	Lx-Wu	PART NO.	2MT3012-W05915H
CHKD	Harlen	SCALE	2:1
APVD	Steve	SIZE	A3
		SHEET	1 OF 1
REV: A			
CUSTOMER COPY			

1 2 3 4 5 6 7 8