


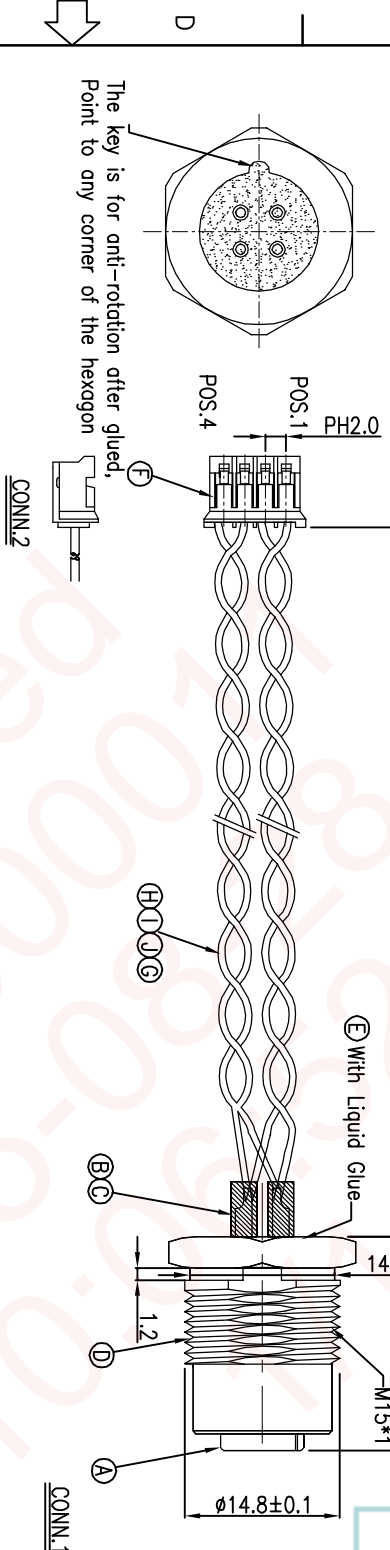


REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	T150204-3A	Vicky	2015.02.05
B	ECN NO.:	S150824-C	Harlen	2015.8.17

文員
DCC(SZ)
陳環環
2015/08/26
09:01:37

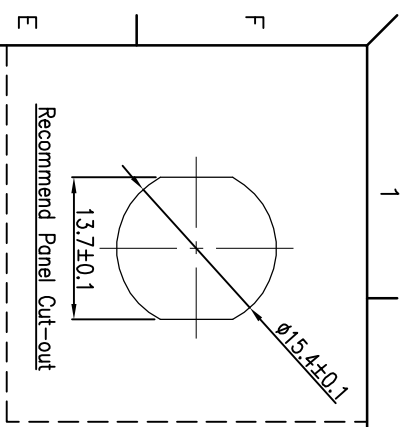

CONN.2	WIRE COLOR	CONN.1
1	WHITE	2
2	GREEN	4
3	RED	1
4	BLACK	3

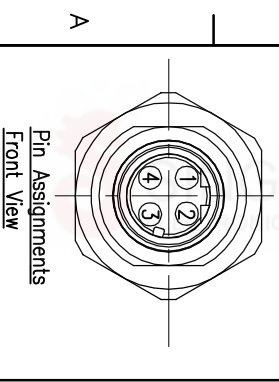

- NOTES:
- ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -40°C TO +100°C(PANEL)
RATING: 60V AC/DC 5A
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - SPECIFICATIONS:SEE "M12 SERIES SPECIFICATIONS".
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 - FOR PANEL THICKNESS MAX OF 3.5mm
 - NTT TORQUE: 11.5kgf.cm Max.

J	WIRE	1	UL1007 26AWG	GREEN
I	WIRE	1	UL1007 26AWG	WHITE
H	WIRE	1	UL1007 26AWG	RED
G	WIRE	1	UL1007 26AWG	BLACK
F	CONNECTOR	4	COPPER	TIN
E	LIQUID GLUE	1	N/A	WHITE
D	SHIELD	1	BRASS	BLACK
C	SHRINK TUBE	4	φ2.4*10mm 漆	NICKEL PLATING 100u"
B	FEMALE PIN	4	Phosphor Bronze	BLACK
A	BODY	1	PA66+GF	BLACK

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	BODY	1	PA66+GF	BLACK
B	FEMALE PIN	4	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
C	SHRINK TUBE	4	φ2.4*10mm 漆	BLACK
D	SHIELD	1	BRASS	NICKEL PLATING 100u"
E	LIQUID GLUE	1	N/A	WHITE
F	CONNECTOR	4	COPPER	TIN
G	WIRE	1	UL1007 26AWG	BLACK
H	WIRE	1	UL1007 26AWG	RED
I	WIRE	1	UL1007 26AWG	WHITE
J	WIRE	1	UL1007 26AWG	GREEN

DECIMALS:	ANGLES:
X : ±0.5	X : ±2°
X.X : ±0.3	X.X : ±1'
X.XX : ±0.2	

TITLE	M12 D-CODED SERIES FRONT MOUNT FEMALE CONN. (4PIN) HEXAGONAL BACKSHELL
DWN	Harlen
CHKD	JF
APVD	Steve

Singatron Enterprise Co., Ltd.
信登企業股份有限公司

CUSTOMER COPY