

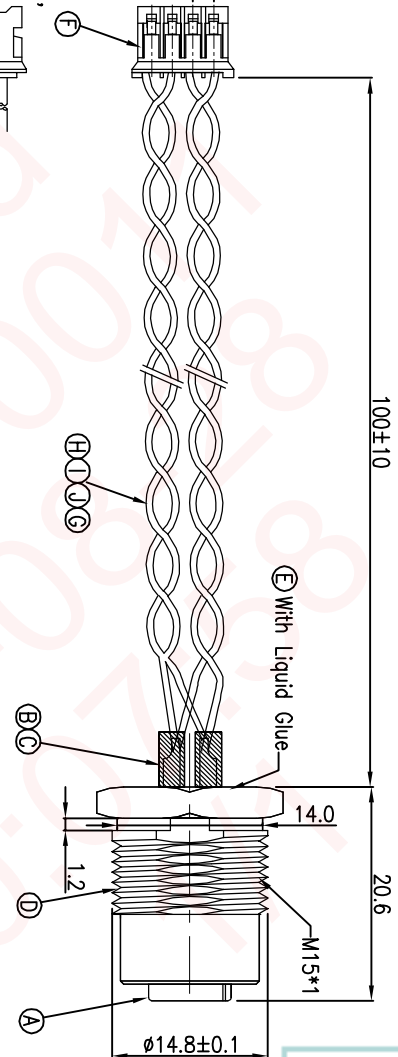
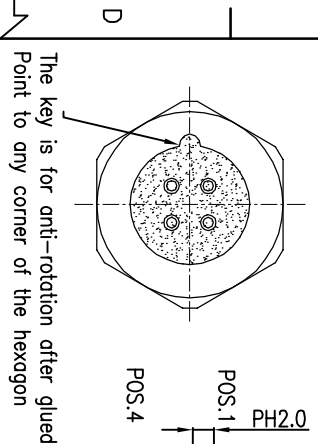



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.	T150428-3A	Blues	2015.07.29
B	ECN NO.	S150824-C	Horlen	2015.8.17

文員
DCC(SZ)
陳煥環
2015/08/26

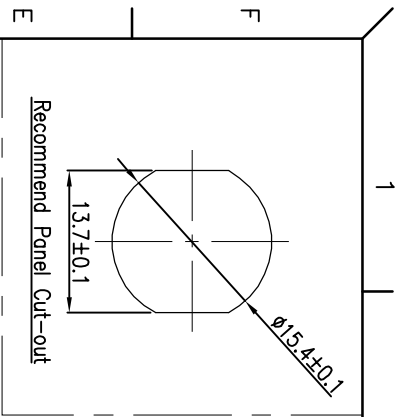


1	WHITE	2
2	GREEN	4
3	RED	1
4	BLACK	3

CONN.2 WIRE COLOR CONN.1

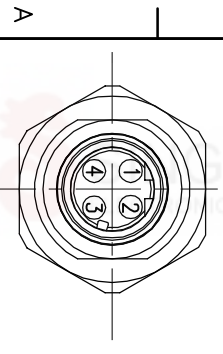

- NOTES:
- ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -40°C TO +100°C(PANEL)
RATING: 60V AC/DC 5A
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - SPECIFICATIONS:SEE "M12 SERIES SPECIFICATIONS".
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:



J	WIRE	1	UL1007 26AWG	GREEN
I	WIRE	1	UL1007 26AWG	WHITE
H	WIRE	1	UL1007 26AWG	RED
G	WIRE	1	UL1007 26AWG	BLACK
F	CONNECTOR	4	COPPER	TIN
E	LIQUID GLUE	1	NYLON 66	WHITE
D	SHIELD	1	N/A	BLACK
C	SHRINK TUBE	4	BRASS	NICKEL PLATING 100u"
B	FEMALE PIN	4	ø2.4*10mm 鍍	BLACK
A	BODY	1	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
NO	DESCRIPTION	1	PA66+GF	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信營企業股份有限公司

TITLE M12 D-CODED SERIES FRONT MOUNT FEMALE CONN. (4PIN) HEXAGONAL BACKSHELL

DWN Horlen PART NO. 2MT3404-W04320H

CHKD JF SCALE 2:1 UNIT: mm

APVD Steve SIZE: A3 SHEET: 1 OF 1 REV: B

CUSTOMER COPY