


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T121015-10A~10C	Shown		2012.11.29

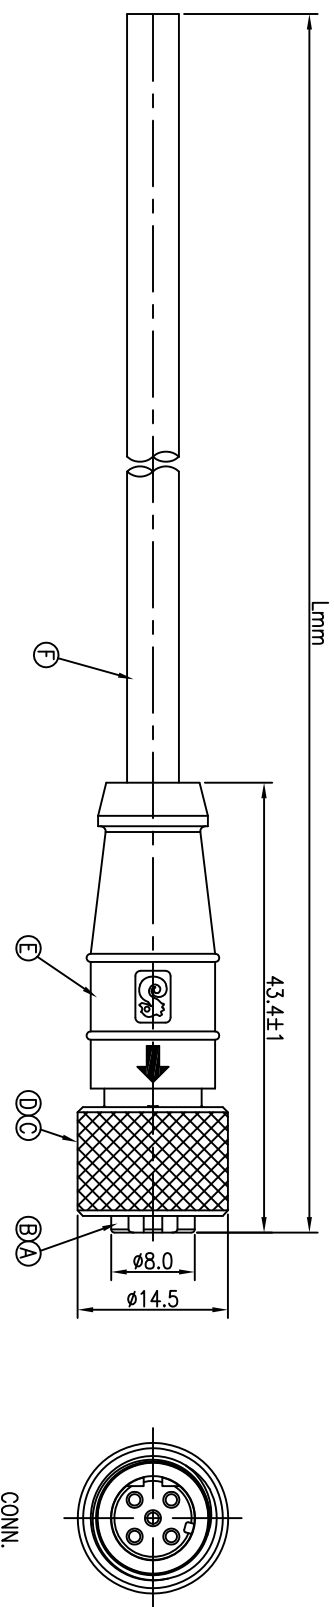

C	2MT3410 -W03300H		UL2464 22AWG*3C+A, PVC Jacket, UV Resistant OD=φ5.0, Wire Color: 1.Brown 3.Blue 4.Black
	2MT3410 -W04300H		UL2464 22AWG*4C+A, PVC Jacket, UV Resistant OD=φ5.0, Wire Color: 1.Brown 2.White 3.Blue 4.Black
	2MT3410 -W05300H		UL2464 22AWG*5C+A, PVC Jacket, UV Resistant OD=φ5.5, Wire Color: 1.Brown 2.White 3.Blue 4.Black 5.Green

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -40°C TO +80°C
RATING: 60V AC/DC 5A
1M~9M±500mm.
 3. CABLE LENGTH TOLERANCE: 1M~10M±5mm,
11M~99M±500mm.
 4. SPECIFICATIONS:SEE "M12 SERIES SPECIFICATIONS".
 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 7. ORDER INFORMATION: 2MT3410-W0X300H

- 3- 3 PIN
- 4- 4 PIN
- 5- 5 PIN

F	CABLE	1	SEE CABLE SPEC	BLACK(PVC JACKET)
E	OVER MOLD	1	TPU	BLACK
D	O-RING	1	VTON	RED
C	SCREW NUT	1	BRASS	NICKEL PLATING 60μ"
B	FEMALE PIN	*	Phosphor Bronze	6μ" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	TPU	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 				
TITLE M12 SERIES 180°(3~5)PIN D-CODE FEMALE CONN.				
DECIMALS:	ANGLES:			
X :±0.5	X :±2°			
X.X :±0.3	X.X :±1°			
X.XX :±0.2				
DWN	Shown	PART NO.2MT3410-W03300H	SCALE 2:1	UNIT: mm
CHKD	Horlen	SIZE: A3	SHEET:1 OF 1	REV: A
APVD	Steve	CUSTOMER COPY		

1 2 3 4 5 6 7 8

X#機殼 02-06-045-A