
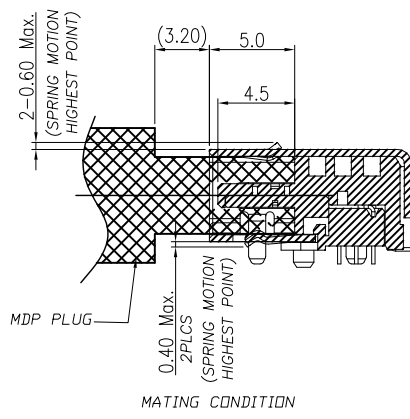
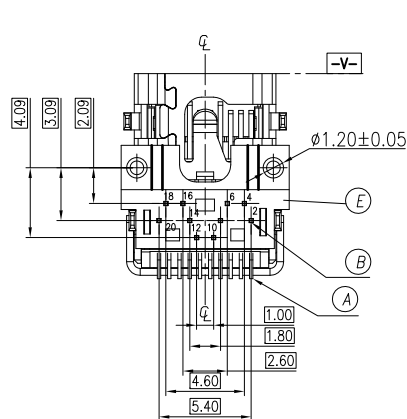


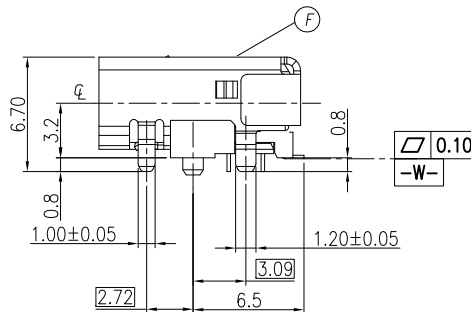
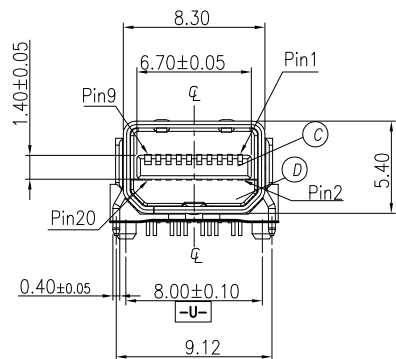
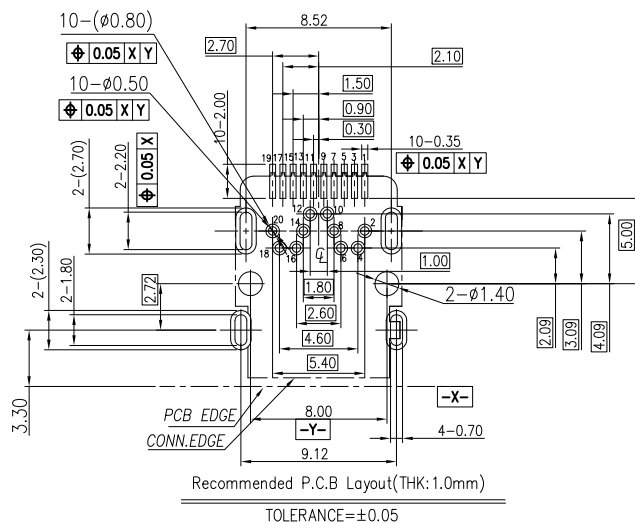


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.T120806-5A	ERIC-WU	2013.11.15

SPECIFICATIONS:

- CONTACT RESISTANCE: 100mΩ MAX.(INITIAL)(EIA-364-23).
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- INSULATION RESISTANCE: 100MΩ AT 500 VDC (ANSI/EIA 364-21,Method 302)
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 4.50 Kg Max.
 - WITHDRAWAL FORCE : 0.50~4.00 Kg
- LIFE TEST: 10,000 CYCLES MIN.
- OTHER GENERAL SPEC. TO REFER "2MY3006-000111F SPEC".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK:
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- DATE : YYMMDD-
- PACKAGING : TRAY

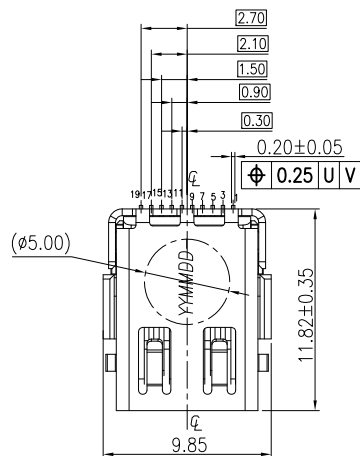

F	SHELL	1	STAINLESS STEEL 0.40T	BLACK Ni 60u"(Min.)
E	COVER	1		
D	BOTTOM-MOLDING	1	HIGH TEMP.THERMOPLASTIC UL 94V-0	BLACK
C	UP-MOLDING	1		
B	BOTTOM TERMINAL	10	COPPER ALLOY 0.20T	GOLD FLASH (1U7 Au Min.)PLATING ON CONTACT AREA MATT TIN 100uIn Min. ON SOLDER TAIL AREA OVERALL 50uIn Min.NICKEL UNDER PLATING
A	UP TERMINAL	10	COPPER ALLOY 0.20T	
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS: ANGLES:		TITLE: Thunderbolt (20Pin)		
X	:±0.5	X	:±2°	DWN ERIC PART NO.2MY3006-000111F
X.X	:±0.3	X.X	:±1°	CHKD BOYE SCALE 1:1 UNIT: mm
X.XX	:±0.2	APVD	MAX	SIZE: A3 SHEET:1 OF 1 REV:A
CUSTOMER COPY				