
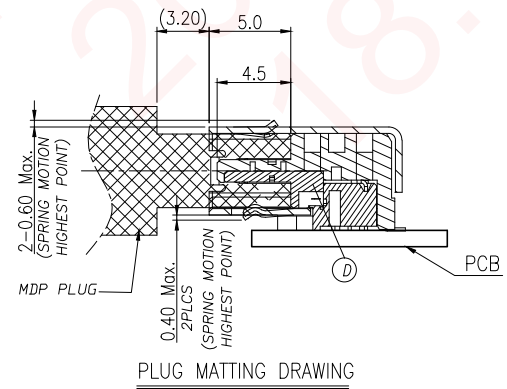
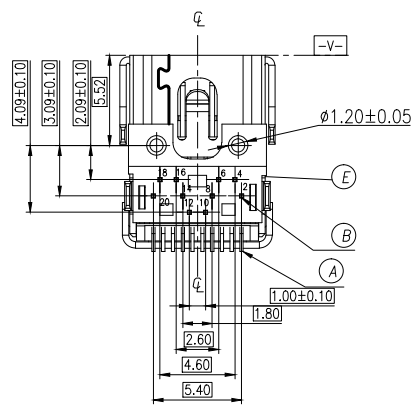

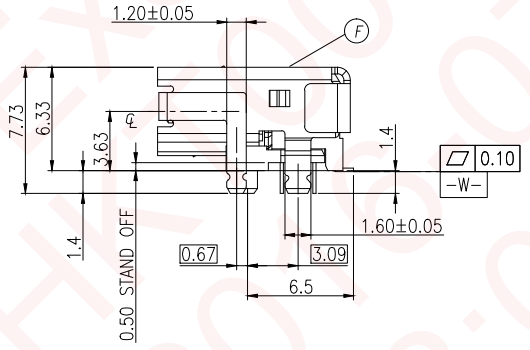

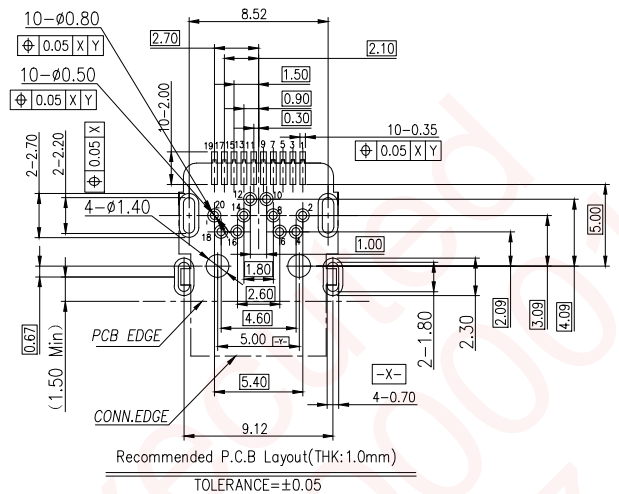


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.T160226-7A	PENG	2016.04.08

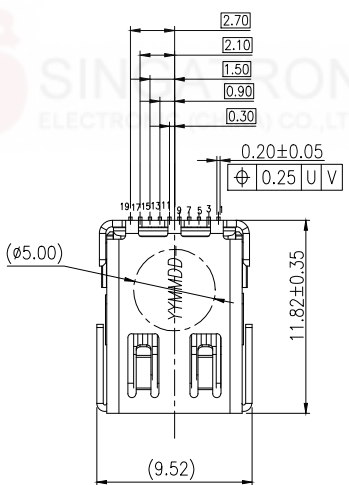


SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 100mΩ MAX.(INITIAL)(EIA-364-23).
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
  - INSULATION RESISTANCE: 100MΩ AT 500 VDC (ANSI/EIA 364-21,Method 302)
- MECHANICAL CHARACTERISTICS:
  - INSERTION FORCE : 4.5 Kg Max.
  - WITHDRAWAL FORCE : 0.50Kg ~4.00 kg
- LIFE TEST: 10,000 CYCLES MIN.
- OTHER GENERAL SPEC. TO REFER "2MY3006-000111F SPEC".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK:
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- DATE : YYMMDD-
- PACKAGING : TAPE REEL

Table:

2MY3006-00X111F
PLATING CODE:
1: GOLD FLASH
8: 15uIn Au



F	SHELL	1	SUS304, 0.40T	Ni 60u"(Min)
E	COVER	1		
D	BOTTOM-MOLDING	1	LCP , UL 94V-0	BLACK
C	UP-MOLDING	1		
B	BOTTOM TERMINAL	10	C5210-H 0.20T	CONTACT AREA PLATING SEE TABLE
A	UP TERMINAL	10	C5210-H 0.20T	MATT TIN 100uIn MIN ON SOLDER TAIL AREA OVERALL 50uIn NICKEL UNDER PLATING
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS:	ANGLES:	TITLE		
X :±0.5	X :±2°	Thunderbolt (20PIN)		
X.X :±0.3	X.X :±1°	DWN	peng	PART NO.2MY3006-00X111F
X.XX :±0.2		CHKD	james	SCALE 1:1 UNIT: mm
		APVD	boye	SIZE: A3 SHEET:1 OF 1 REV:A
CUSTOMER COPY				