

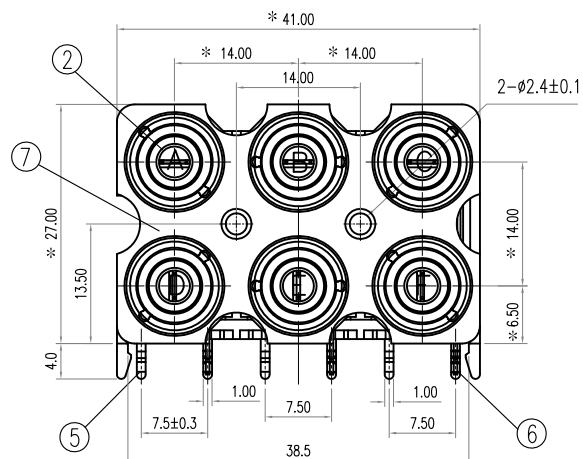



A3

* REVISIONS


LTR	DESCRIPTION	DATE	REVISED	APPROVED
A2	修改尺寸和腳的畫法與實物相符	2009.3.12	ANJOU	GIEVEN
A3	圖面更新规范化	2016.12.27	H.RP	GAOWEI

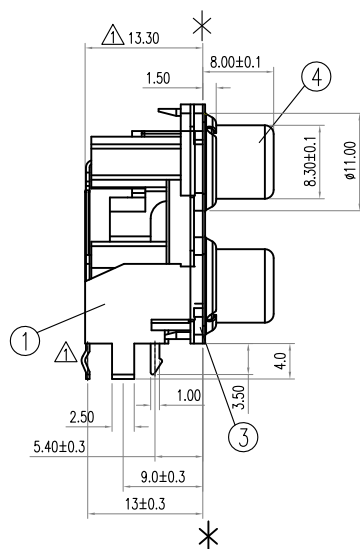

DATE CODE:
YY:YEAR(11~XX)
MM:MONTH(01~12)
DD:DAY(01~31)

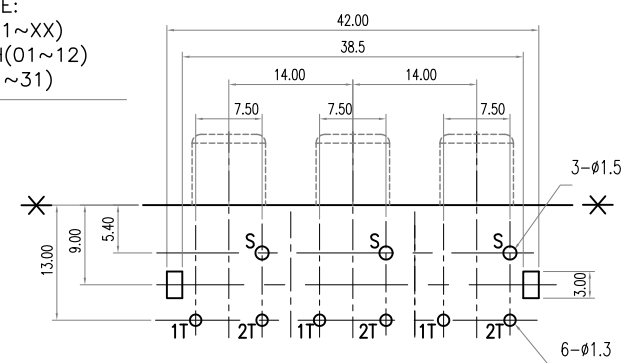

Recommend of PC Board Holes
Tolerance : ± 0.05 (Bottom view)

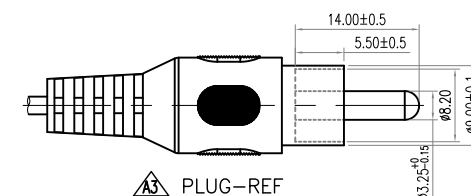

A3 PLUG-REF

Notes: 

1. Electrical Characteristics:
 1-1. Rating : DC 12V 1A ;
 1-2. Contact Resistance: 30mΩ Max.(Initial),
 Between plug and contact 100mΩ Max;
 (Final) After Life test: ≤60mΩ ;
 1-3. Dielectric Withstanding Voltage: 500V AC for One Minute ;
 1-4. Insulation Resistance: 100MΩ Min. Measured By 500 VDC;


2. Mechanical Characteristics:
 2-1. Plug Insertion Force 0.3~3.0Kgf (initial),
 0.3~3.0Kgf (Final) life test;
 2-2. Plug Extraction Force: 0.3~3.0Kgf (initial),
 0.3~3.0Kgf (Final) life test;

3. Durability Test: 500 Cycles min;
4. Operating temperature:-25°C ~ +70°C;
5. Soldering Heat Resistance Wave soldering 230°C;
6. Plug Interface Dimensions Conform To EIAJ RC-5231A Spec;
7. Packaging:xxxxxxx;

Table”



TYPE	A	B	C
	D	E	F
WASHER COLOR	YELLOW	WHITE	RED
	YELLOW	WHITE	RED

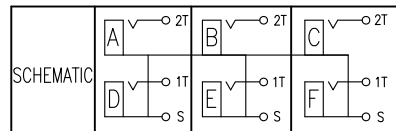SCHEMATIC



LEAD FREE

7	SEALED PLATED	1	C2680 t=0.25	MB:Cu Cu/Sn PLATED
6	TERMINAL	3	C2680 t=0.4	MB:Cu Cu/Sn PLATED
5	TERMINAL	3	C2680 t=0.4	MB:Cu Cu/Sn PLATED
4	OUTER CONTACT	3	C2680 t=0.3	MB:Cu Cu/Sn PLATED
3	COVER	3	ABS	UL-94HB(BLACK)
2	WASHER	6	PBT	UL-94V0 Color See Table"
1	HOUSING	1	PBT	UL-94V0(BLACK)

LTR	PART NAME	QTY	MATERIAL	REMARK
-TOLERANCES- UNLESS OTHERWISE SPECIFIED		Singatron Enterprise Co., Ltd.		
 公差		TITLE	PIN JACK	
X.X ±0.38	X.X" ±3"	DWN	ANJOU2007.11.18	PART NO. 2PJ-W246V34-11H
X.XX ±0.30	X.XX" ±1"	CHKD	ANJOU2007.11.18	SCALE 1:1 UNIT: mm 
X.XXX ±0.20		APVD	GIEVEN2007.11.18	SIZE: A3 SHEET:1 OF 1 REV:003
CUSTOMER COPY				