


T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-bottom view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

* REVISIONS				
LTR	DESCRIPTION	DATE	REVISED	APPROVED

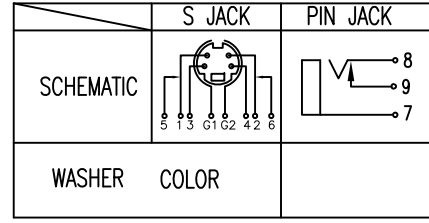

LEAD FREE

14	SEALED PLATE	1	C2680 t=0.4	MB:Cu Cu/Sn PLATED
13	CLIP HOLDER	1	POM	UL-94HB(WHITE)
12	COVER	1	PBT 4815	UL-94V0(BLACK)
11	SHUNT SPRING	1	C2680 t=0.4	MB:Cu Ag PLATED
10	TIP SPRING	1	C5191 t=0.4	MB:Cu Ag PLATED
9	CONTACT FOOT	1	C2680 t=0.4	MB:Cu Cu/Sn PLATED
8	S TIP SPRING	2	C5191 t=0.4	MB:Cu Ag PLATED
7	S TIP SPRING	2	C5191 t=0.4	MB:Cu Ag PLATED
6	S SHUNT SPRING	2	C5191 t=0.4	MB:Cu Ag PLATED
5	GROUND CONTACT	1	C2680 t=0.4	MB:Cu Cu/Sn PLATED
4	GROUND CONTACT	1	C2680 t=0.4	MB:Cu Cu/Sn PLATED
3	OUTER CONTACT	1	C2680 t=0.4	MB:Cu Cu/Sn PLATED
2	WASHER	1	PBT 4815	UL-94V0
1	HOUSING	1	PBT 4815	UL-94V0(BLACK)

LTR	PART NAME	QTY	MATERIAL	REMARK
DWN	ANJOU	DATE	2008.11.25	3RD ANGLE PROJECTION
CHKD	ANJOU	DATE	2008.11.25	
APVD	GIEVEN	DATE	2008.11.25	UNIT: mm
SINGATRON U.S.A.				NAME PIN JACK+S JACK
				CAT. NO. 2PJ-WT04098A-H
DWN.NO.				001
				WL-04098A