

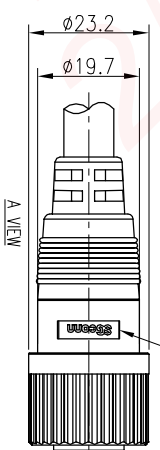


REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S150203-1A	JF		2015.08.18

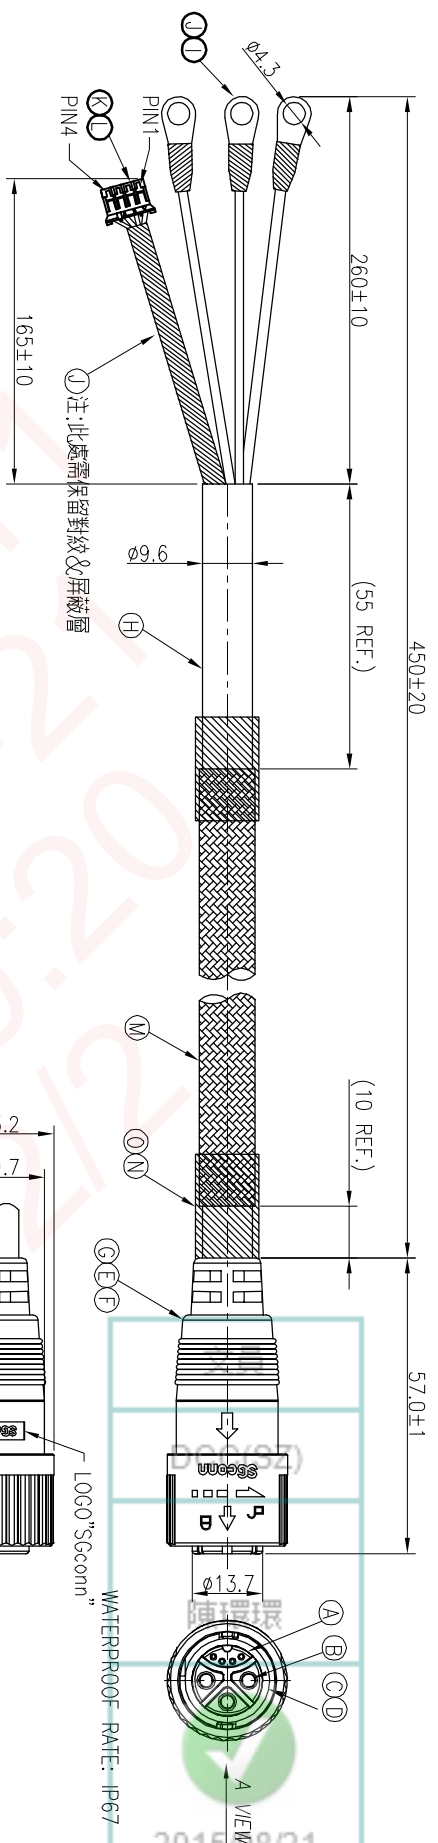

4	BLACK(24AWG)	7
3	YELLOW(24AWG)	6
2	WHITE(24AWG)	5
1	GREEN(24AWG)	4
	DRAIN+YELLOW/GREEN(14AWG)	3
	BLUE(14AWG)	2
	BROWN(14AWG)	1
	WIRE COLOR	CONN.

B	CONN.	PIN OUT
---	-------	---------



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67
 2. ELECTRICAL CHARACTERISTICS
CURRENT RATING: 20+2A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

O	ACETATE TAPE	2	W20 TO.18	BLACK
N	HEAT SHRINK TUBE	2	Ø15.0 L=20mm	BLACK
M	MESH LOOM	1	NYLON	BLACK
L	TERMINAL	4	PHOSPHOR BRONZE	1u" GOLD PLATING
K	HOUSING	1	NYLON66	WHITE
J	HEAT SHRINK TUBE	4	Ø5.0 125' 600V	BLACK
I	O-TERMINAL	3	BRASS	TIN-PLATED
H	CABLE	1	UL2464 14#*3C+(CAT.5E 24#*2P+AD)(UV) 0D9.6	BLACK(PVC JACKET)
G	SPRING	1	SUS	N/A
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	TPU	BLACK
D	O-RING	1	SILICONE	BLUE
C	LOCK NUT	1	PC	GREY
B	FEMALE PIN	7	Phosphor Bronze	(1~6)u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

Singatron Enterprise Co., Ltd.
 信登企業股份有限公司
 WATERPROOF RATE: IP67
 2015/08/21
 9:14:40

CUSTOMER COPY