





REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	S140227-5C	Horlen	2015.1.20

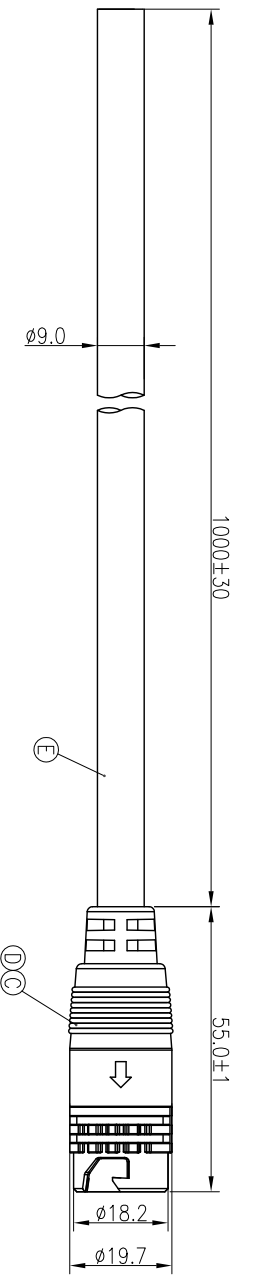

WATERPROOF RATE: IP67

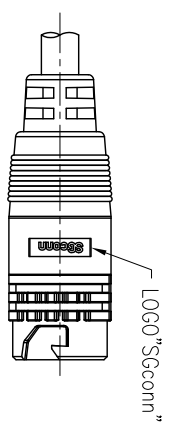

WHITE	2
BLACK	1
WIRE COLOR	CONN.
PIN OUT	



- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - 1-1 CURRENT RATING: 20 AMPS.
 - 1-2 CONTACT RESISTANCE: 3 Ohm Max.
 - 1-3 INSULATION RESISTANCE: 100 Mohm Min. at 500VDC.
 - 1-4 BREAKDOWN VOLTAGE: 1000 VAC PER MINUTE .
 - ENVIRONMENTAL:
 - 2-1 OPERATING TEMPERATURE: -20°C TO +80°C.
 - 2-2 SEALING REQUIREMENTS: IP67.
 - 3. LIFE TEST: 1,000 CYCLES MIN.
 - OTHER GENERAL SPEC. TO REFER "CIRCULAR SERIES GENERAL SPEC".
 - FOR TECHNICAL DATA REFER TO YOUR LOCAL SINGATRON ELECTRONICS SALES OFFICE.
 - ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **ICP PASS**.

E	CABLE	1	UL SJTW 2C*14AWG	BLACK
D	INNER MOLD	1	TPU	NATURAL
C	OVER MOLD	1	TPU	BLACK
B	MALE PIN	2	BRASS	(1~3)u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信音企業股份有限公司				
TITLE CIRCULAR SERIES QUICK TYPE MIDDLE SIZE (180° IP67) MALE CONN. MALE 2 PIN				
DECIMALS:	ANGLES:			
X : ±0.5	X : ±2°			
X.X : ±0.3	X.X : ±1°			
X.XX : ±0.2				
DWN	Horlen	PART NO.:	QJM3024-M02600H	
CHKD	JF	SCALE:	1:1	UNIT: mm
APVD	Steve	SIZE:	A3	SHEET: 1 OF 1
REV: A				

CUSTOMER COPY