
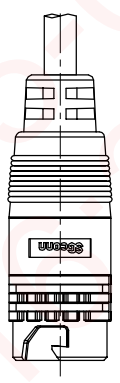



REV	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO:IT150204-2A	Horlen	2015.7.9

文員
DCC(SZ)
陳環環
2015/07/20
15:16:20

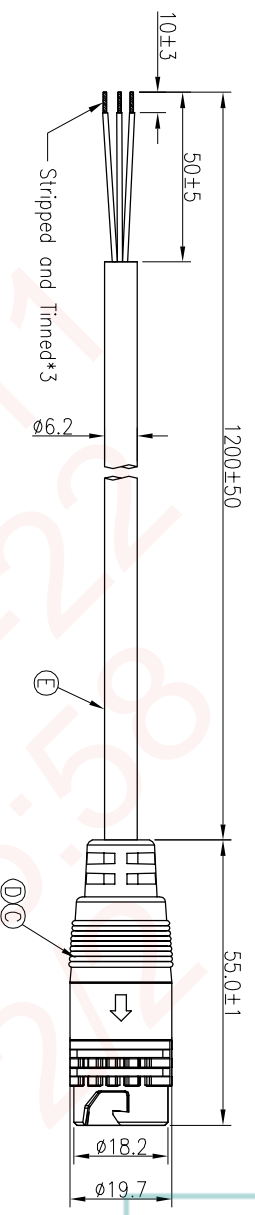

A VIEW

YELLOW/GREEN	3
WHITE	2
BLACK	1
WIRE COLOR	CONN.
PIN OUT	



Pin Assignments
Front View

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - 1-1 CURRENT RATING: 10 AMPS.
 - 1-2 CONTACT RESISTANCE: 3 Ohm Max.
 - 1-3 INSULATION RESISTANCE: 100 Mohm Min. at 500VDC.
 - 1-4 BREAKDOWN VOLTAGE: 1000 VAC PER MINUTE.
 - ENVIRONMENTAL:
 - 2-1 OPERATING TEMPERATURE: -20°C TO +80°C.
 - 2-2 SEALING REQUIREMENTS: IP67.
 - LIFE TEST: 1,000 CYCLES MIN.
 - OTHER GENERAL SPEC. TO REFER "QUICK SERIES GENERAL SPEC."
 - FOR TECHNICAL DATA REFER TO YOUR LOCAL SINGATRON ELECTRONICS SALES OFFICE.
 - ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
E	CABLE	1	PLTC 18AWG*3C OD6.2	BLACK
D	INNER MOLD	1	TPU	NATURAL
C	OVER MOLD	1	TPU	BLACK
B	MALE PIN	3	BRASS	(1~3)u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES: TITLE

X :±0.5 X :±2°

X.X :±0.3 X.X :±1'

X.XX :±0.2

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
Singatron Enterprise Co., Ltd. 信登企業股份有限公司				
CIRCULAR SERIES QUICK TYPE MIDDLE SIZE(780'.IP67) MALE CONN. MALE 3 PIN				
DWN	Horlen	PART NO.20M3024-W03405H	SCALE 1:1	UNIT: mm
CHKD	JF	SIZE: A3	SHEET:1 OF 1	REV:4
APVD	Steve	CUSTOMER COPY		