

REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S150625-5A		Vicky	2015.05.14


轉 嗎

DCC(SZ)



胡為南

2015/12/28

3:56:11

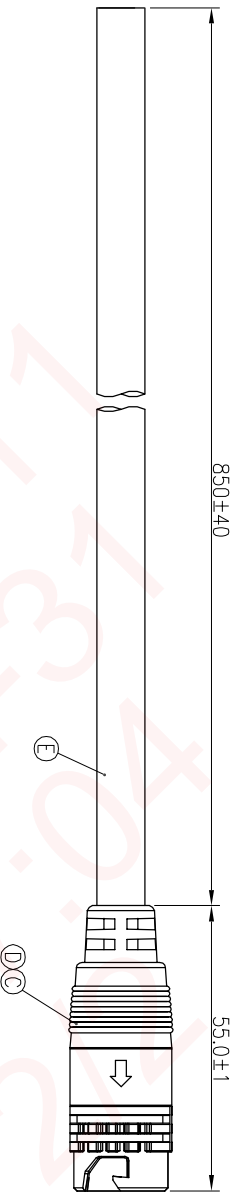


WATERPROOF RATE: IP67

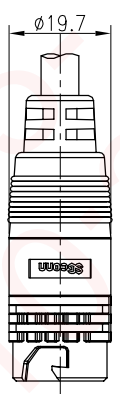

客户料号: 3.50.4718.41.1103

GREEN	3
WHITE	2
BLACK	1
WIRE COLOR	CONN.



Pin Assignments
Front View

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - 1-1 CURRENT RATING: 20 AMPS.
 - 1-2 CONTACT RESISTANCE: 3 Ohm Max.
 - 1-3 INSULATION RESISTANCE: 100 Mohm Min. at 500VDC.
 - 1-4 BREAKDOWN VOLTAGE: 1000 VAC PER MINUTE.
 - ENVIRONMENTAL:
 - 2-1 OPERATING TEMPERATURE: -20°C TO +80°C.
 - 2-2 SEALING REQUIREMENTS: IP67.
 - 3. LIFE TEST: 1,000 CYCLES MIN.
 - 4. OTHER GENERAL SPEC. TO REFER "QUICK SERIES GENERAL SPEC".
 - 5. FOR TECHNICAL DATA REFER TO YOUR LOCAL SINGATRON ELECTRONICS SALES OFFICE.
 - 6. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
 - 7. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - 8. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

E	CABLE	1	CJ86/SC 3*1.5mm ²	BLACK
D	INNER MOLD	1	TPU	NATURAL
C	OVER MOLD	1	TPU	BLACK
B	MALE PIN	3	BRASS	(1~3)u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
Singatron Enterprise Co., Ltd. 信登企業股份有限公司 CIRCULAR SERIES QUICK TYPE MIDDLE SIZE (180' IP67) MALE CONN. MALE 3 PIN DWG Vicky PART NO. 2QM3024-W03602H CHKD Harden SCALE 1:1 UNIT: mm APVD Steve SIZE: A3 SHEET: 1 OF 1 REV: A CUSTOMER COPY				