



REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S150203-1B	JF		2015.08.18

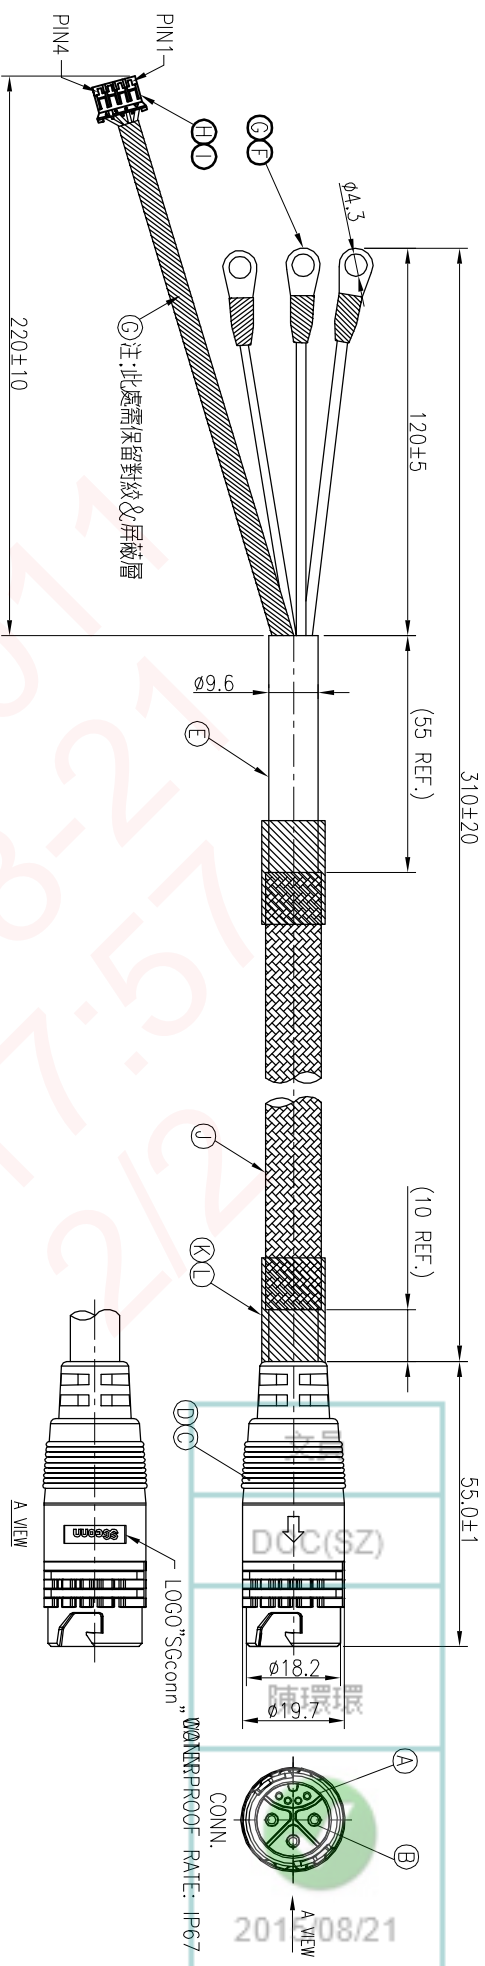

4	BLACK(24AWG)	7
3	YELLOW(24AWG)	6
2	WHITE(24AWG)	5
1	GREEN(24AWG)	4
	DRAIN+YELLOW/GREEN(14AWG)	3
	BLUE(14AWG)	2
	BROWN(14AWG)	1
	WIRE COLOR	CONN.

B CONN.



Pin Assignments
Front View

NOTES:

1. WATERPROOF RATE: IP67
2. ELECTRICAL CHARACTERISTICS
CURRENT RATING: 20+2A
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

L	ACETATE TAPE	2	W20 T0.18	BLACK
K	HEAT SHRINK TUBE	2	Ø15.0 L=20mm	BLACK
J	MESH LOOM	1	NYLON	BLACK
I	TERMINAL	4	PHOSPHOR BRONZE	1u" GOLD PLATING
H	HOUSING	1	NYLON66	WHITE
G	HEAT SHRINK TUBE	4	Ø5.0 125' 600V	BLACK
F	O-TERMINAL	3	BRASS	TIN-PLATED
E	CABLE	1	UL2464 14#*3C+(24#*2P +AD)+F(UV) 0D9.6mm	BLACK(PVC JACKET)
D	INNER MOLD	1	TPU	NATURAL
C	OVER MOLD	1	TPU	BLACK
B	MALE PIN	7	BRASS	(1~3)u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
Singatron Enterprise Co., Ltd. 信營企業股份有限公司				
TITLE: CIRCULAR SERIES QUICK TYPE MIDDLE SIZE(IP67) MALE CONN. MALE 3+4 PIN (20+2A)				
DWN	JF	PART NO.2QM3024-W07E01H	SCALE 1:1	UNIT: mm
CHKD	Yang	SIZE: A3	SHEET: 1 OF 1	REV: A
APVD	Horlen	CUSTOMER COPY		