



CABLE BINDING SPEC.

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S140605-2A	Horlen	2014.11.27
B	ECN NO.:S150417-R	Blues	2015.04.13
C	ECN NO.:S150550-R	Blues	2015.05.25
D	ECN NO.:S202203-C15	LEI	2022.04.07
E	ECN NO.:S202206-R07	LEI	2022.06.24

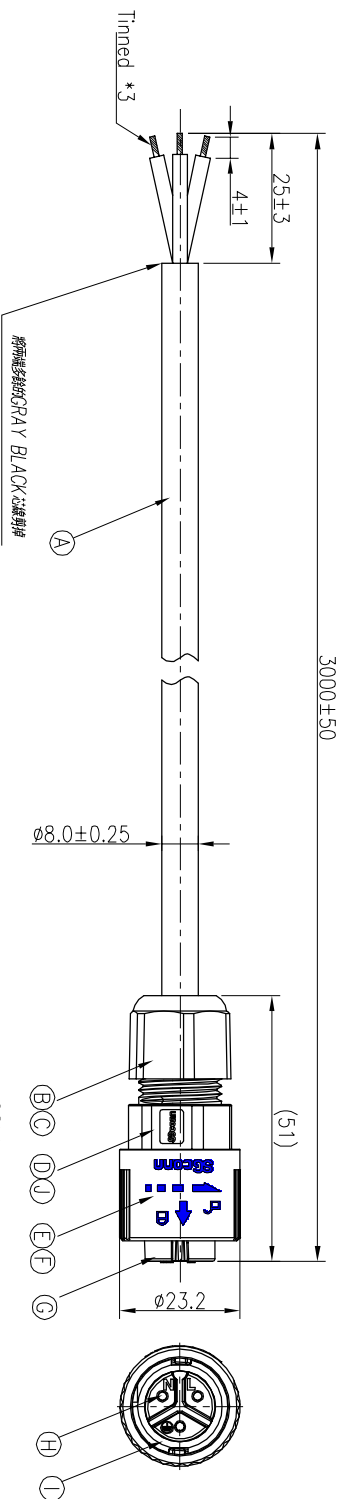

N	BLUE
L	YELLOW/GREEN
CONN.	BROWN
	WIRE COLOR
PIN DEFINITION	
CONN.	



PIN ASSIGNMENTS  
FRONT VIEW

- NOTES:
1. CURRENT RATING: 5 AMPS.
  2. OPERATING TEMPERATURE: -20°C TO +70°C.
  3. OTHER GENERAL SPEC. TO REFER "QUICK SERIES GENERAL SPEC."
  4. FOR TECHNICAL DATA REFER TO YOUR LOCAL SINGATRON ELECTRONICS SALES OFFICE.
  5. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
  6. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREESPEC.
  7. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

CUSTOMER P/N	SINGATRON P/N
MHCAH100611300	ZQM3032-W03404H

J	GASKET	1	SILICONE	BLACK
I	O-RING	1	SILICONE	BLUE
H	FEMALE PIN	1	COPPER ALLOY	1~3u" GOLD PLATING OVER NICKEL PLATING
G	BODY	1	PA66+GF	GRAY(PANTONG 427C)
F	SPRING	1	SUS	N/A
E	LOCK NUT	1	PC	GRAY(PANTONG 427C)
D	CLAMP RING	1	PC	GRAY(PANTONG 427C)
C	SEAL	1	EPDM	BLACK
B	SEALING NUT	1	PC	GRAY(PANTONG 427C)
A	CABLE	1	H05W-F 5C*0.75mm <sup>2</sup>	GRAY(PANTONG 427C)
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES: TITLE QUICK SERIES MIDDLE SIZE FEMALE CONN. WALE 3 PIN(S4) CABLE

DWN LEI PART NO. ZQM3032-W03404H  
CHKD JF SCALE 1:1 UNIT: mm  
APVD Steve SIZE: A3 SHEET: 1 OF 1 REV: E

CUSTOMER COPY