


1	2	3	4	5	6	7	8												
<table border="1"> <tr> <th>REV.</th> <th>ECN NO. OR DESCRIPTION</th> <th>REVISED</th> <th>DATE</th> </tr> <tr> <td>A</td> <td>PDR NO.:S170314-2A</td> <td>Vicky</td> <td>2017.03.14</td> </tr> <tr> <td>B</td> <td>ECN NO.:S202201-R06</td> <td>Elrod</td> <td>2022.01.11</td> </tr> </table>								REV.	ECN NO. OR DESCRIPTION	REVISED	DATE	A	PDR NO.:S170314-2A	Vicky	2017.03.14	B	ECN NO.:S202201-R06	Elrod	2022.01.11
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE																
A	PDR NO.:S170314-2A	Vicky	2017.03.14																
B	ECN NO.:S202201-R06	Elrod	2022.01.11																

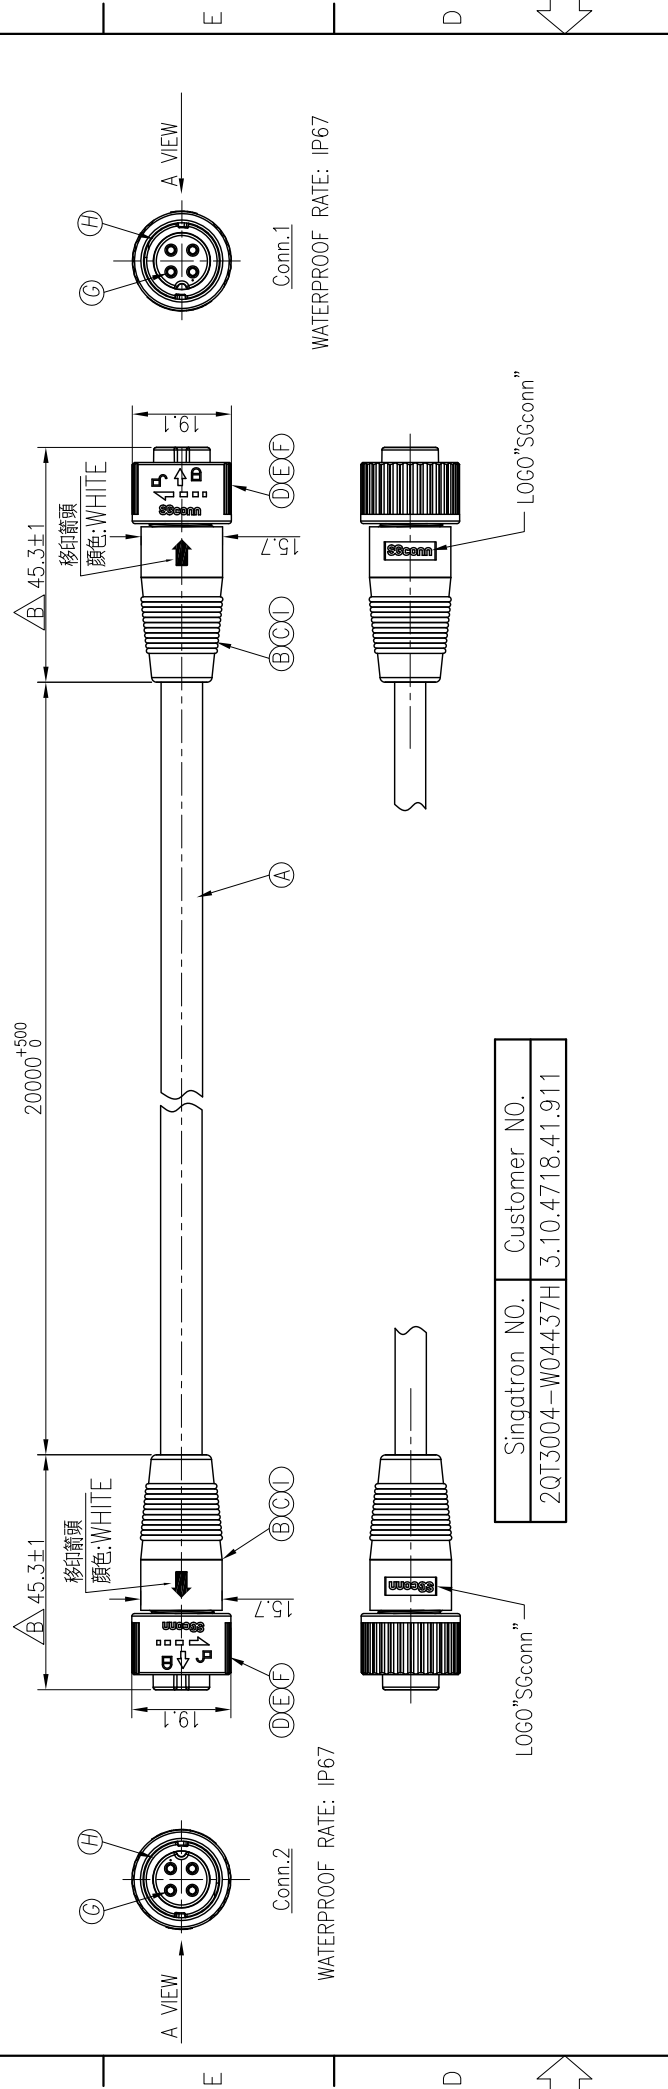

4	YELLOW	4																																													
3	BLUE	3																																													
2	BLACK	2																																													
1	RED	1																																													
CONN.2	WIRE COLOR	CONN.1																																													
PIN DEFINITION																																															
CONN.1&2																																															
Pin Assignments																																															
Front View																																															
<p>NOTES:</p> <ol style="list-style-type: none"> ELECTRICAL CHARACTERISTICS: <ul style="list-style-type: none"> 1-1 CURRENT RATING: 10 AMPS. 1-2 CONTACT RESISTANCE: 3 Ohm Max. 1-3 INSULATION RESISTANCE: 100 Mohm Min. at 500VDC. 1-4 BREAKDOWN VOLTAGE: 1000VAC PER MINUTE. ENVIRONMENTAL: <ul style="list-style-type: none"> 2-1 OPERATING TEMPERATURE: -40°C TO +105°C. 2-2 SEALING REQUIREMENTS: IP67. LIFE TEST: 1,000 CYCLES MIN.. OTHER GENERAL SPEC TO REFER "QUICK SERIES GENERAL SPEC". FOR TECHNICAL DATA REFER TO YOUR LOCAL SINGATRON ELECTRONICS SALES OFFICE. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS 																																															
<table border="1"> <tr> <td>Singatron NO.</td> <td>Customer NO.</td> </tr> <tr> <td>2QT3004-W04437H</td> <td>3.10.4718.41.911</td> </tr> </table>			Singatron NO.	Customer NO.	2QT3004-W04437H	3.10.4718.41.911																																									
Singatron NO.	Customer NO.																																														
2QT3004-W04437H	3.10.4718.41.911																																														
<table border="1"> <tr> <th>H</th> <th>BODY</th> <th>2</th> <th>PA66+25%GF(A63V0)</th> <th>BLACK</th> </tr> <tr> <th>G</th> <th>FEMALE PIN</th> <th>8</th> <th>Phosphor Bronze</th> <th>1~3u" GOLD PLATING OVER NICKEL PLATING</th> </tr> <tr> <th>F</th> <th>O-RING</th> <th>2</th> <th>SILICONE</th> <th>BLUE</th> </tr> <tr> <th>E</th> <th>SPRING</th> <th>2</th> <th>SUS</th> <th>N/A</th> </tr> <tr> <th>D</th> <th>LOCK NUT</th> <th>2</th> <th>PC EXL 9330</th> <th>GREY</th> </tr> <tr> <th>C</th> <th>INNER MOLD</th> <th>2</th> <th>TPU</th> <th>BLACK</th> </tr> <tr> <th>B</th> <th>OVER MOLD</th> <th>2</th> <th>TPU</th> <th>BLACK</th> </tr> <tr> <th>A</th> <th>CABLE</th> <th>1</th> <th>UL2733 18AWG*4C+T (UV) OD8.0客供</th> <th>WHITE</th> </tr> <tr> <th>NO</th> <th>DESCRIPTION</th> <th>QTY</th> <th>MATERIAL</th> <th>PLATING & COLOR</th> </tr> </table> <p>UNLESS OTHERWISE SPECIFIED TOLERANCES</p> <p>DECIMALS: ANGLES: X :±0.5 X :±2° X.X :±0.3 X.X.X :±1° X.XX :±0.2</p> <p>Suzhou Singatron Auto Electronics CO.,LTD. 蘇州音普汽車電子有限公司</p> <p>CIRCULAR SERIES QUICK TYPE STANDARD SIZE FEMALE CONN. FEMALE 4PIN (180°IP67)</p> <p>DWN Elrod PART NO.2QT3004-W04437H</p> <p>CHKD UNIT: mm</p> <p>APVD SIZE: A3 SHEET:1 OF 1 REV: B</p> <p>CUSTOMER COPY</p>			H	BODY	2	PA66+25%GF(A63V0)	BLACK	G	FEMALE PIN	8	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING	F	O-RING	2	SILICONE	BLUE	E	SPRING	2	SUS	N/A	D	LOCK NUT	2	PC EXL 9330	GREY	C	INNER MOLD	2	TPU	BLACK	B	OVER MOLD	2	TPU	BLACK	A	CABLE	1	UL2733 18AWG*4C+T (UV) OD8.0客供	WHITE	NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
H	BODY	2	PA66+25%GF(A63V0)	BLACK																																											
G	FEMALE PIN	8	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING																																											
F	O-RING	2	SILICONE	BLUE																																											
E	SPRING	2	SUS	N/A																																											
D	LOCK NUT	2	PC EXL 9330	GREY																																											
C	INNER MOLD	2	TPU	BLACK																																											
B	OVER MOLD	2	TPU	BLACK																																											
A	CABLE	1	UL2733 18AWG*4C+T (UV) OD8.0客供	WHITE																																											
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR																																											