


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A210930-1A-B	LEI	2021.12.13
B	ECN NO.:S202201-R06	Elrod	2022.01.11

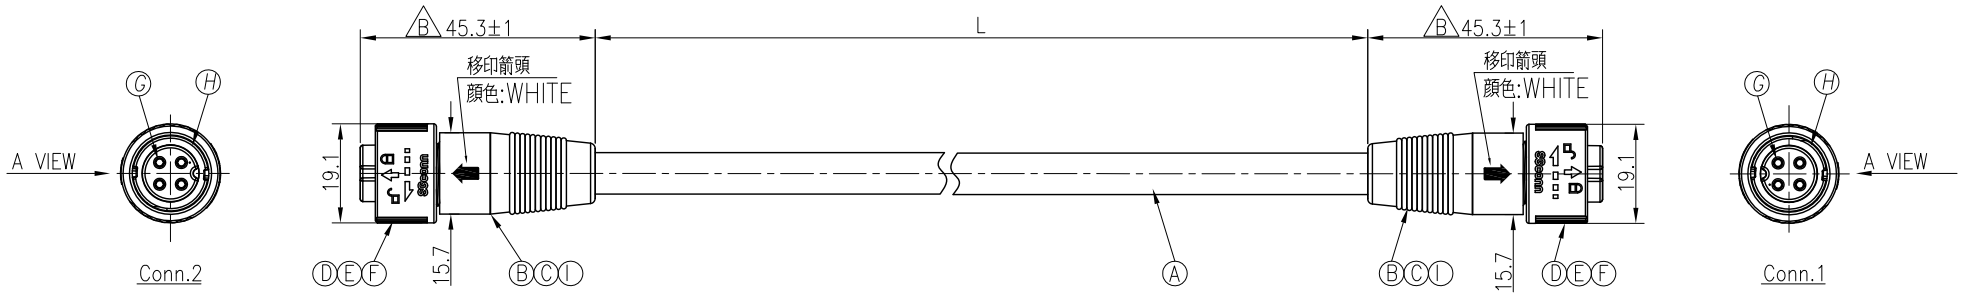


Singatron NO.	"L"mm
2QT3004-W04448H	L=13100+500/-0
2QT3004-W04449H	L=16000+500/-0

4	YELLOW	4	Short
3	BLUE	3	
2	BLACK	2	
1	RED	1	
CONN.2	WIRE COLOR	CONN.1	

PIN DEFINITION

CONN.1&2



Pin Assignments
Front View

NOTES:

- CURRENT RATING: 10A
- OPERATING TEMPERATURE: -40°C TO +105°C.
- WATERPROOF RATE: IP67.
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
I	WIRE	2	UL1007 24AWG L=30	BLACK
H	BODY	2	NYLON	BLACK
G	FEMALE PIN	8	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
F	O-RING	2	SILICONE	BLUE
E	SPRING	2	SUS	N/A
D	LOCK NUT	2	PC	GREY
C	INNER MOLD	2	TPU	NATURAL
B	OVER MOLD	2	TPU	BLACK
A	CABLE	1	UL2733 18AWG*4C+T (UV) OD8.0客供	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

Suzhou Singatron Auto Electronics CO.,LTD.
蘇州信音汽車電子有限公司

DECIMALS: ANGLES:
X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

TITLE	CIRCULAR SERIES QUICK TYPE STANDARD SIZE FEMALE CONN. FEMALE 4PIN (180°,IP67)		
DWN	Elrod	PART NO.2QT3004-W0444XH	
CHKD	SCALE 1:1	UNIT: mm	
APVD	SIZE: A3	SHEET:1 OF 1	REV: B

CUSTOMER COPY