


M	MALE PIN	4	Phosphor Bronze	(1~3)μ" GOLD PLATING OVER NICKEL PLATING
L	MALE BODY	1	PA66	BLACK
K	CABLE	1	H05RN-F 3*0.75 OD:6.8mm	BLACK
J	OVER MOLD	1	PVC	BLACK
I	INNER MOLD	1	ABS	BLACK
H	COPPER NUT	2	M3*0.5鋼螺母	N/A
G	OVER MOLD	2	TPU	BLACK
F	INNER MOLD	2	TPU	NATURAL
E	O-RING	1	SILICONE	BLUE
D	SPRING	1	SUS	N/A
C	LOCK NUT	1	PC	GRAY
B	FEMALE PIN	4	Phosphor Bronze	(1~3)μ" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	BLACK

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2	X.XX		
Suzhou Singatron Auto Electronics CO.,LTD. 蘇州信音汽車電子有限公司				
CIRCULAR SERIES QUICK TYPE MIDDLE SIZE FEMALE CONN&MALE CONN.				
TITLE	PART NO.:2QT3004-W04451H			
DWN	JAY	SCALE	1:1	UNIT: mm
CHKD	JF	SIZE	A3	SHEET:1 OF 1
APVD	Steve	REV: A		
CUSTOMER COPY				



- NOTES:
- ELECTRICAL CHARACTERISTICS:
 1-1 CURRENT RATING: 10 AMPS.
 1-2 CONTACT RESISTANCE: 3 Ohm Max.
 1-3 INSULATION RESISTANCE: 100 Mohm Min. at 500VDC.
 - ENVIRONMENTAL:
 2-1 OPERATING TEMPERATURE: -20°C TO +70°C.
 2-2 SEALING REQUIREMENTS: IP67.
 - OTHER GENERAL SPEC TO REFER QUICK SERIES GENERAL SPEC*.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: [REDACTED]

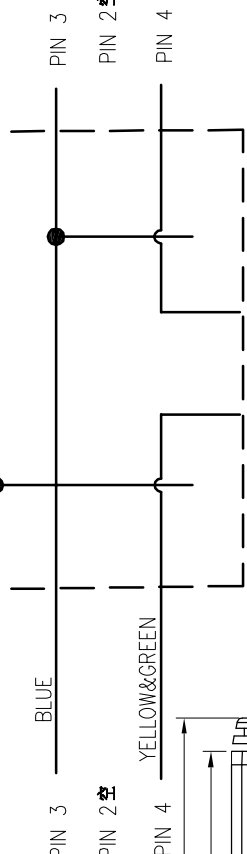