



REV: ECN NO OR DESCRIPTION	REVISED	DATE
A PDR NO.:A211214-1A	JAY	2022.01.14

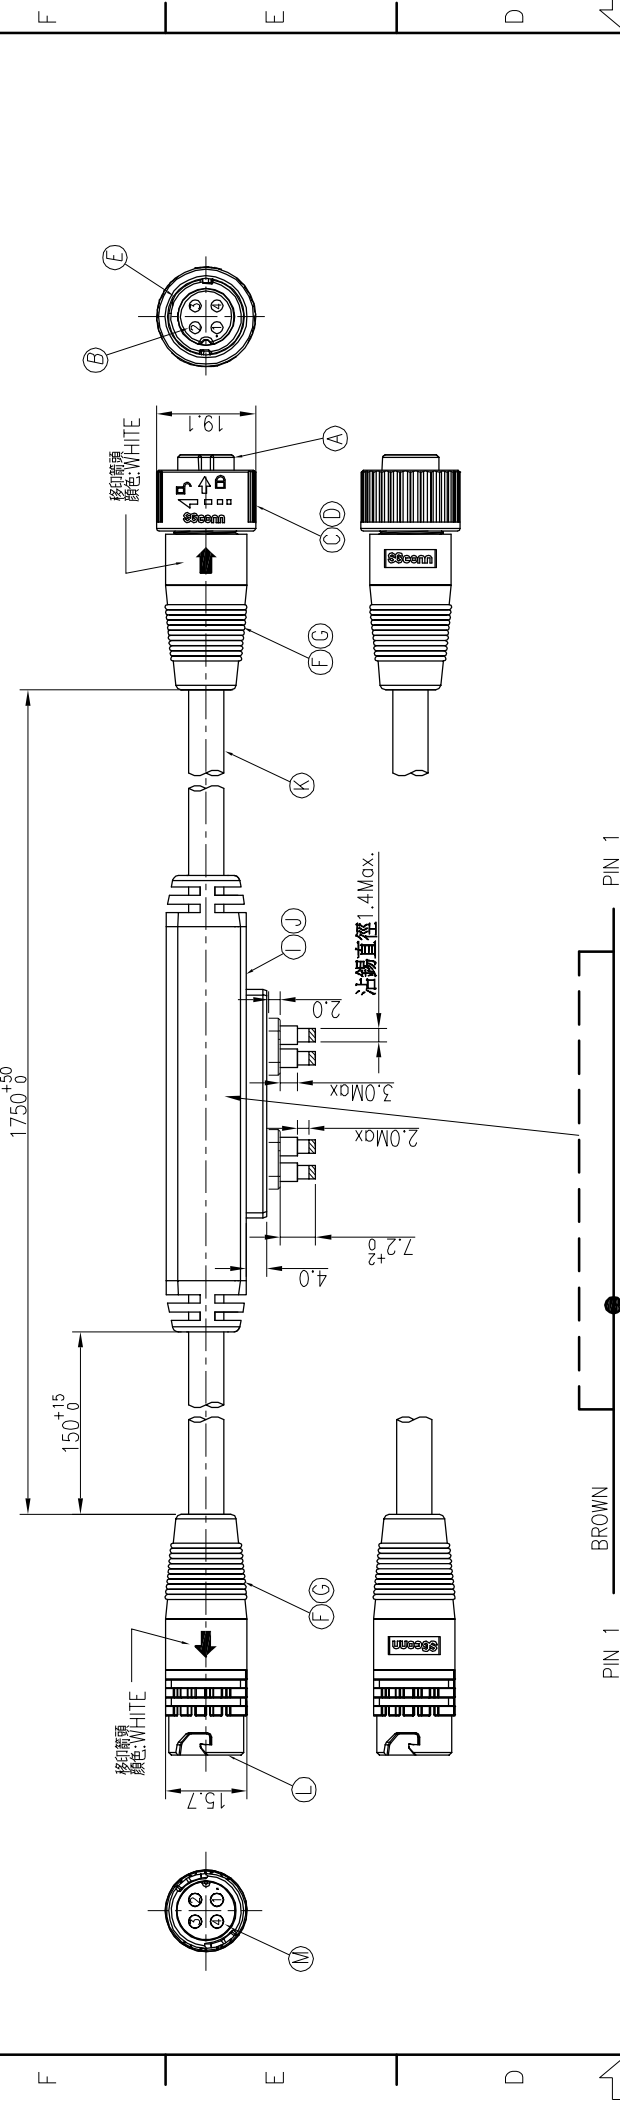

M	MALE PIN	4	Phosphor Bronze	(1~3)μ" GOLD PLATING OVER NICKEL PLATING
L	MALE BODY	1	PA66	BLACK
K	CABLE	1	H05RN-F 3*0.75 OD:6.8mm	BLACK
J	OVER MOLD	1	PVC	BLACK
I	INNER MOLD	1	ABS	BLACK
H	COPPER NUT	2	M3*0.5鋼螺母	N/A
G	OVER MOLD	2	TPU	BLACK
F	INNER MOLD	2	TPU	NATURAL
E	O-RING	1	SILICONE	BLUE
D	SPRING	1	SUS	N/A
C	LOCK NUT	1	PC	GRAY
B	FEMALE PIN	4	Phosphor Bronze	(1~3)μ" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		Suzhou Singatron Auto Electronics CO.,LTD. 蘇州信音汽車電子有限公司	
DECIMALS:	ANGLES:	TITLE	CIRCULAR SERIES QUICK TYPE MIDDLE SIZE FEMALE CONN&MALE CONN.
X :±0.5	X :±2°	DWN	JAY
X.X :±0.3	X.X :±1°	CHKD	JF
X.XX :±0.2		APVD	Steve
		SCALE	1:1
		UNIT	mm
		SIZE	A3
		SHEET	1 OF 1
		REV	A
CUSTOMER COPY			

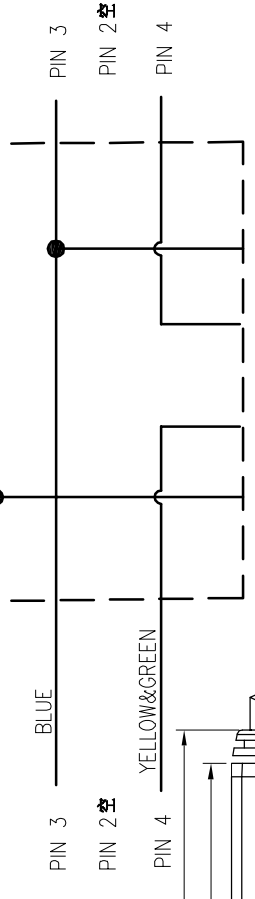

- NOTES:
- ELECTRICAL CHARACTERISTICS:
    - 1-1 CURRENT RATING: 10 AMP.
    - 1-2 CONTACT RESISTANCE: 3 Ohm Max.
    - 1-3 INSULATION RESISTANCE: 100 Mohm Min. at 500VDC.
  - ENVIRONMENTAL:
    - 2-1 OPERATING TEMPERATURE: -20°C TO +70°C.
    - 2-2 SEALING REQUIREMENTS: IP67.
  - OTHER GENERAL SPEC TO REFER QUICK SERIES GENERAL SPEC.
  - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: [REDACTED]

