





REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S170725-1A	Vicky	2017.07.25	

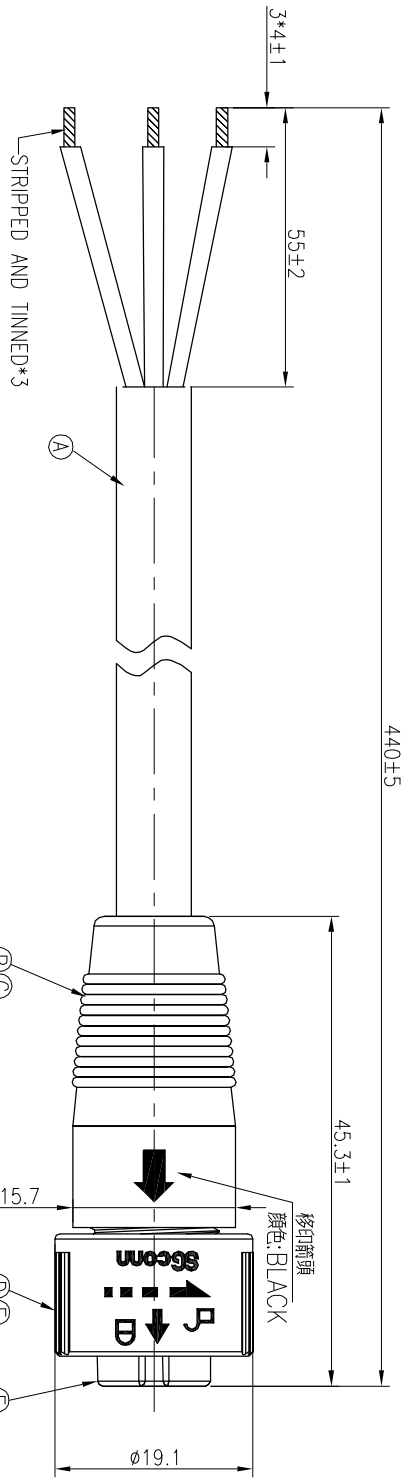

WATERPROOF RATE: IP67

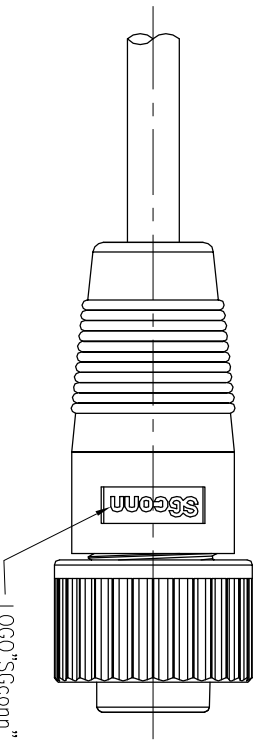

BLUE	3
WHITE	2
BROWN	1
WIRE COLOR	CONN.
PIN OUT	
CONN.	



Pin Assignments
Front View

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - 1-1 CURRENT RATING: 10 AMPS.
 - 1-2 CONTACT RESISTANCE: 5mOhm Max.
 - 1-3 INSULATION RESISTANCE: 100 MOhm Min. at 500VDC.
 - 1-4 BREAKDOWN VOLTAGE: 1000VAC PER MINUTE.
 - ENVIRONMENTAL:
 - 2-1 OPERATING TEMPERATURE: -35°C TO +105°C.
 - 2-2 SEALING REQUIREMENTS: IP67.
 - OTHER GENERAL SPEC TO REFER"QUICK SERIES GENERAL SPEC."
 - FOR TECHNICAL DATA REFER TO YOUR LOCAL SINGATRON ELECTRONICS SALES OFFICE.
 - ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: [\(see page\)](#)
 - 使用線纜型號: 華仁阻燃等級C級 (內芯和外护套) 使用溫度 -35°C—105°C 符合ROHS標準線纜類型: 2517 外皮PVC內芯交聯聚乙烯 (XLPE) 2*1.5mm²+1*0.5mm² 內芯顏色棕、藍、白, 白色 (RL9016) 护套外徑7.2±0.25mm

符合ROHS標準線纜類型: 2517 外皮PVC內芯交聯聚乙烯 (XLPE) 2*1.5mm²+1*0.5mm² 內芯顏色棕、藍、白, 白色 (RL9016) 护套外徑7.2±0.25mm

H	0-RING	1	SILICONE	BLUE
G	MALE PIN	3	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
F	FEMALE BODY	1	PA66+25%GF	WHITE
E	SPRING	1	SUS	N/A
D	LOCK NUT	1	PA66+25%GF	WHITE
C	INNER MOLD	1	TPU	NATURAL
B	OVER MOLD	1	TPU	WHITE
A	CABLE	1	2C*1.5mm ² +1C*0.5mm ² OD:7.2mm	WHITE
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES: TITLE

APVD Steve SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY