




REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A180302-3A		Wcky	2018.03.07
B	ECN NO.:S202111-E10		LEI	2021.12.01

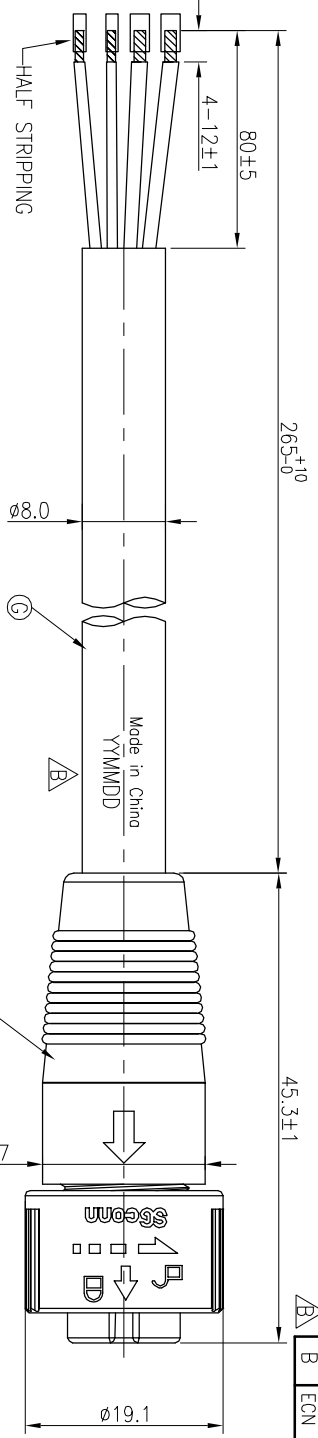


CUSTOMER P/N	P/N
MHCAH172850100	20T3016-W04813H

WHITE(24#)	4
BLACK(14#)	3
RED(14#)	2
YELLOW(24#)	1
WIRE COLOR	CONN.
PIN OUT	




Pin Assignments
Front View

NOTES:
1. WATERPROOF RATE: IP66/67
2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -40° TO +80°
TEST CONDITION: DC300V 10Mohm 10ms
3. SPECIFICATIONS:SEE "QUICK SERIES GENERAL SPEC".
4. TO CONFORM TO ROHS REQUIREMENT AND REACH REGULATION
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: 
6. NON-HUMAN FACTORS CASE SERVICE LIFE IS 5 YEARS
7. LASE DATE CODE "YYMMDD" ON TOP OF OVER MOLD
DATE CODE: YYMMDD



A VIEW

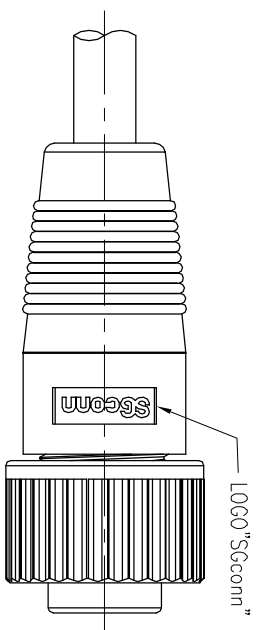

WATERPROOF RATE: IP66/IP67

H	SPRING	1	SUS	N/A
G	CABLE	1	UL2464 14#*2C+ 24#*1P OD8.0	UV RESISTANCE BLACK PVC JACKET
F	INNER MOLD	1	TPEE	NATURAL
E	OVER MOLD	1	TPEE	BLACK
D	O-RING	1	SILICONE	BLUE
C	LOCK NUT	1	PC	GRAY
B	MALE PIN	4	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Suzhou Singatron Auto Electronics CO.,LTD. 蘇州信音汽車電子有限公司				
TITLE CIRCULAR STANDARD SIZE (QUICK TYPE) FEMALE CONN. MALE (2+2) PIN(10+5)A				
DECIMALS: :±0.5 X :±2		ANGLES: X.X :±0.3 X.X :±1°		
X.XX :±0.2		APVD JF SIZE: A3 SHEET: 1 OF 1		
CUSTOMER COPY				