



REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.: S170428-7A	Yang	2018.01.03	

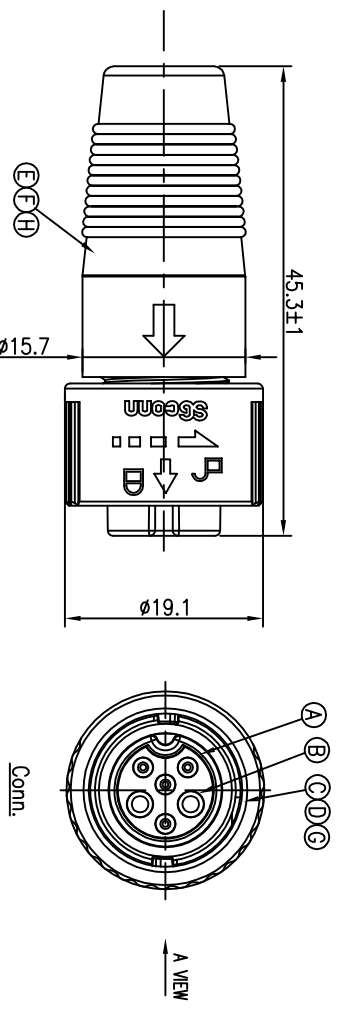


CONN. WATERPROOF RATE: IP67

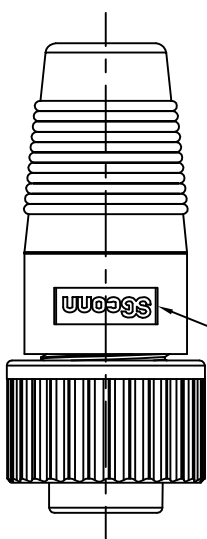

P/N	客戶料號
2QT3016-W06804H	AM086430055

I	TUBE	2	125°C 300V	BLACK
H	RESISTOR	1	120ohm 1/2W/5%	N/A
G	SPRING	1	SUS	N/A
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PP	GRAY
D	O-RING	1	SILICONE	BLUE
C	LOCK NUT	1	PC	GRAY
B	MALE PIN	6	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	GRAY



Pin Assignments
Front View

- NOTES:
- ELECTRICAL CHARACTERISTICS:
1-1 CURRENT RATING: 10+5 AMPS.
 - ENVIRONMENTAL:
2-1 OPERATING TEMPERATURE: -20°C TO +80°C.
2-2 SEALING REQUIREMENTS: IP67.
 - OTHER GENERAL SPEC TO REFER "QUICK SERIES GENERAL SPEC."
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: [GREEN PASS].

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2
X.X :±0.3 X.X :±1'
X.XX :±0.2

Singatron Enterprise Co., Ltd.
信亨企業股份有限公司

TITLE CIRCULAR STANDARD SIZE (QUICK TYPE)
FEMALE CONN. MALE (2+4) PIN(10+5)A

DMN Yang PART NO. 2QT3016-W06804H
CHKD JF SCALE 2:1 UNIT: mm
APVD Steve SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY