
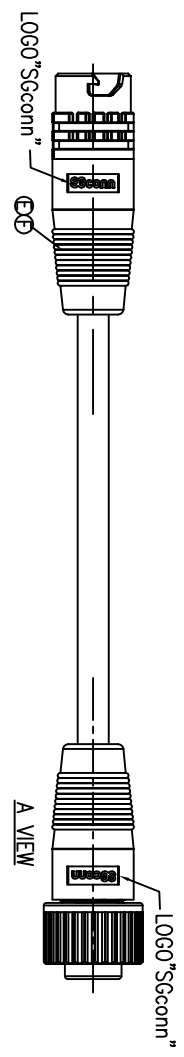


REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S170428-7E		Yang	2017.12.28


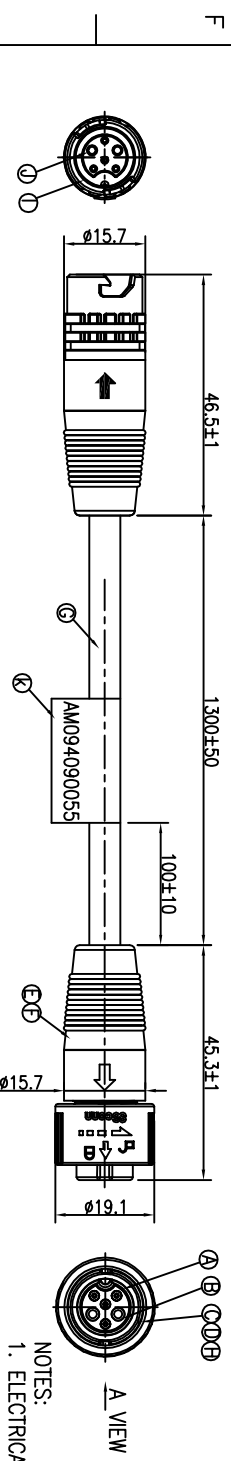


Conn.2
CONN. WATERPROOF RATE: IP67

Conn.1
CONN. WATERPROOF RATE: IP67

6	GREEN(24#)	6
5	YELLOW(24#)	5
4	RED(18#)	4
3	WHITE(24#)	3
2	BLACK(18#)	2
1	BLUE(24#)	1
CONN.2 WIRE COLOR		CONN.1
PIN OUT		
CONN.2		CONN.1

P/N	客戶料號
2QT3016-W06807H	AM094090055

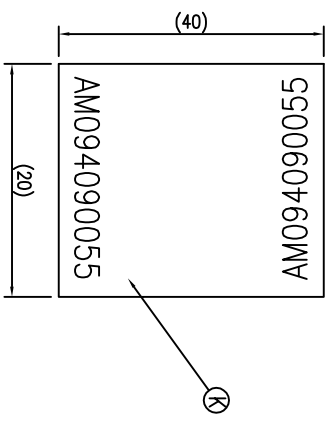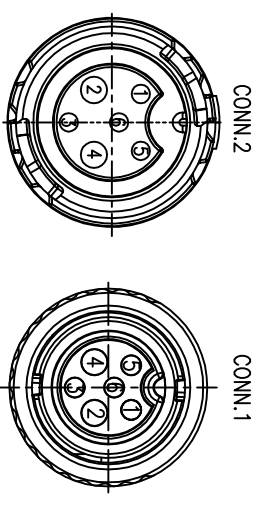

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - 1-1 CURRENT RATING: 10+5 AMPS.
 - 1-2 CONTACT RESISTANCE: 3 Ohm Max.
 - 1-3 INSULATION RESISTANCE: 100 Mohm Min. at 500VDC.
 - 1-4 BREAKDOWN VOLTAGE: 500VAC PER MINUTE.
 - ENVIRONMENTAL:
 - 2-1 OPERATING TEMPERATURE: -20°C TO +80°C.
 - 2-2 SEALING REQUIREMENTS: IP67.
 - LIFE TEST: 1,000 CYCLES MIN.
 - OTHER GENERAL SPEC TO REFER"QUICK SERIES GENERAL SPEC".
 - FOR TECHNICAL DATA REFER TO YOUR LOCAL SINGATRON ELECTRONICS SALES OFFICE.
 - ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PR. DUCT IDENTIFICATION LABEL ON PACKAGING. [G.P. PASS]

K	LABEL	1	L40*W20 PET	WHITE
J	PIN	6	PHOSPHOR BRONZE	GOLD PLATING
I	BODY	1	PA66	GRAY
H	SPRING	1	SUS	N/A
G	CABLE	1	UL2464 24AWG*2P+ 18#*2C+AL 0D7.2 (UV RESISTANT)	GRAY(PVC JACKET) Pantone 424C
F	INNER MOLD	2	TPU	NATURAL
E	OVER MOLD	2	PP	GRAY
D	O-RING	1	SILICONE	BLUE
C	LOCK NUT	1	PC	GRAY
B	MALE PIN	6	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	GRAY
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信音企業股份有限公司				
TITLE CIRCULAR STANDARD SIZE (QUICK TYPE) FEMALE CONN. MALE (2+4) P/N(10+5)A				
DWN	Yang	PART NO.2QT3016-W06807H		
CHKD	JF	SCALE 2:1	UNIT: mm	
APVD	Steve	SIZE: A3	SHEET: 1 OF 1	REV:A

CUSTOMER COPY