
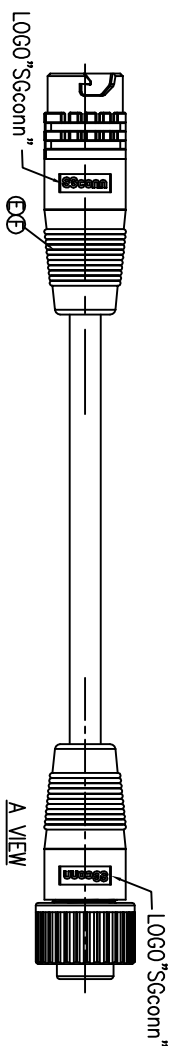




REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A		PDR NO.:S170428-7F	Yang	2018.01.03

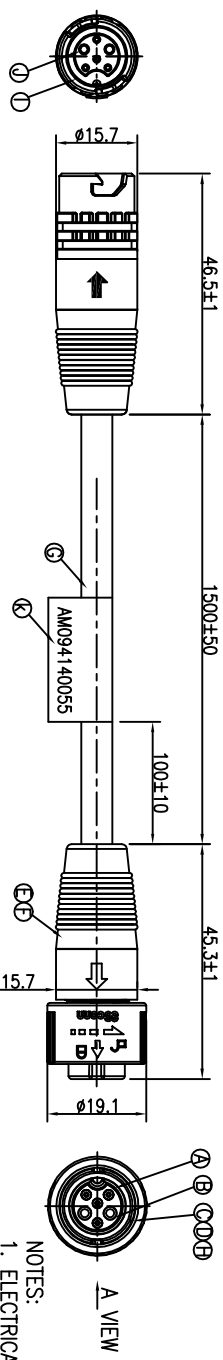

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - 1-1 CURRENT RATING: 10+5 AMPS.
 - 1-2 CONTACT RESISTANCE: 3 Ohm Max.
 - 1-3 INSULATION RESISTANCE: 100 MOhm Min. at 500VDC.
 - 1-4 BREAKDOWN VOLTAGE: 500VAC PER MINUTE.
 - ENVIRONMENTAL:
 - 2-1 OPERATING TEMPERATURE: -20°C TO +80°C.
 - 2-2 SEALING REQUIREMENTS: IP67.
 - LIFE TEST: 1,000 CYCLES MIN.
 - OTHER GENERAL SPEC TO REFER "QUICK SERIES GENERAL SPEC".
 - FOR TECHNICAL DATA REFER TO YOUR LOCAL SINGATRON ELECTRONICS SALES OFFICE.
 - ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PR. DUCT IDENTIFICATION LABEL ON PACKAGING. G.P. PASS

6	GREEN(24#)	6
5	YELLOW(24#)	5
4	RED(18#)	4
3	WHITE(24#)	3
2	BLACK(18#)	2
1	BLUE(24#)	1
CONN.2 WIRE COLOR		CONN.1

P/N	客戶料號
2QT3016-W06808H	AM094140055

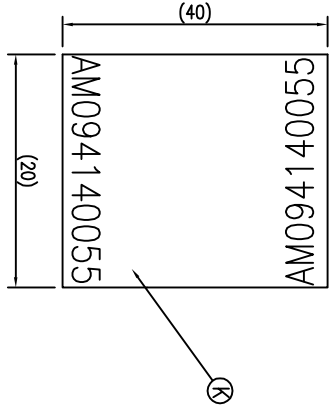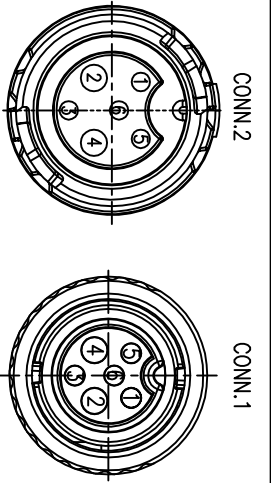

K	LABEL	1	L40*W20 PET	WHITE
J	PIN	6	PHOSPHOR BRONZE	GOLD PLATING
I	BODY	1	PA66	GRAY
H	SPRING	1	SUS	N/A
G	CABLE	1	UL2464 24AWG*2P+ 18#*2C+AL 0D7.2 (UV RESISTANT)	GRAY(PVC JACKET) Pantone 424C
F	INNER MOLD	2	TPU	NATURAL
E	OVER MOLD	2	PP	GRAY
D	O-RING	1	SILICONE	BLUE
C	LOCK NUT	1	PC	GRAY
B	MALE PIN	6	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	GRAY
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信登企業股份有限公司

TITLE	CIRCULAR STANDARD SIZE (QUICK TYPE) FEMALE CONN. MALE (2+4) PIN(10+5)A
DWN	Yang
CHKD	JF
APVD	Steve
DECIMALS:	ANGLES:
X :.F0.5	X :.±2
X.X :.±0.3	X.X :.±1*
X.XX :.±0.2	

PART NO. 2QT3016-W06808H

SCALE 2:1 UNIT: mm

SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY