



REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S160120-7G		Vcky	2016.01.13
B	ECN NO:A180812-C		Vcky	2018.08.15
C	ECN NO:S202111-E10		LEI	2021.11.29



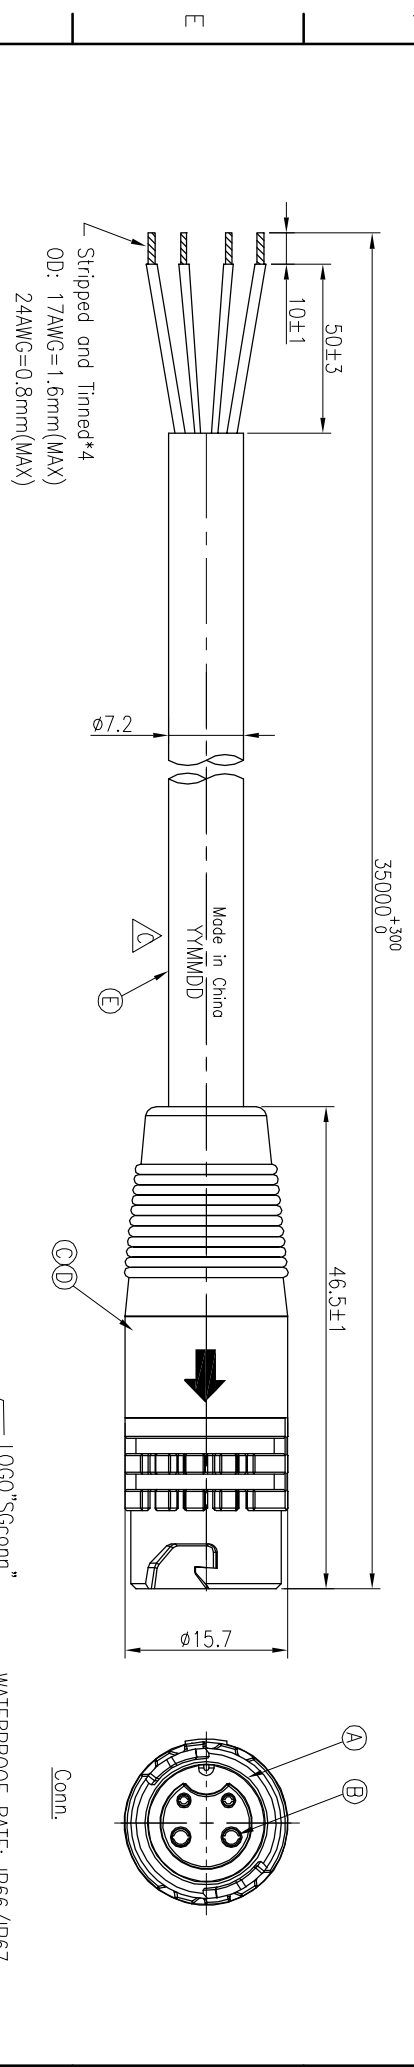


TX P/N	SINGATRON P/N
TU.AC.0600300	20T3030-W04811H

BLACK(24#)	4
BLUE(17#)	3
BROWN(17#)	2
WHITE(24#)	1
WIRE COLOR	CONN.
PIN OUT	



- NOTES:
1. WATERPROOF RATE: IP66/IP67
 2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE:-40° TO +105°
CONTACT RESISTANCE: 0.1 ohm (connector&soldering point)
+0.0163 ohm/meter(cable)
 3. SPECIFICATIONS:SEE "QUICK SERIES GENERAL SPEC".
 4. TO CONFORM TO ROHS REQUIREMENT AND REACH REGULATION
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING.
 6. China RoHS, ROHS & REACH COMPLIANCE
 7. NON-HUMAN FACTORS CAUSE SERVICE LIFE IS 5 YEARS
 8. LASE DATE CODE "YYMMDD" ON TOP OF OVER MOLD

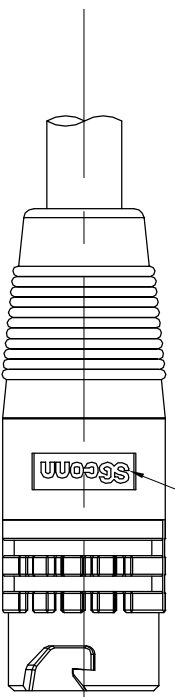

E	CABLE	1	UL21996 17#*2C+P+ 24#*1P(UV) 0D7.2 Sun Res Wet60°C Cable	BLACK (PVC JACKET)
D	INNER MOLD	1	TPEE	NATURAL
C	OVER MOLD	1	TPEE	BLACK
B	FEMALE PIN	4	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	BLACK
NO DESCRIPTION		QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Suzhou Singatron Auto Electronics CO.,LTD. 蘇州信譽汽車電子有限公司				
CIRCULAR STANDARD SIZE (QUICK TYPE)				
TITLE	MALE CONN. FEMALE (2+2)PIN(10+5)A LOCK TYPE			
DWN	LEI	PART NO.2QT3030-W04811H		
CHKD	JF	SCALE 2:1	UNIT: mm	
APVD	JF	SIZE: A3	SHEET:1 OF 1	REV: C
CUSTOMER COPY				