



REV.	ECN NO OR DESCRIPTION	REVISED	REVISED DATE
A	PDR NO.:A181012-3A	Vicky	2018.10.16

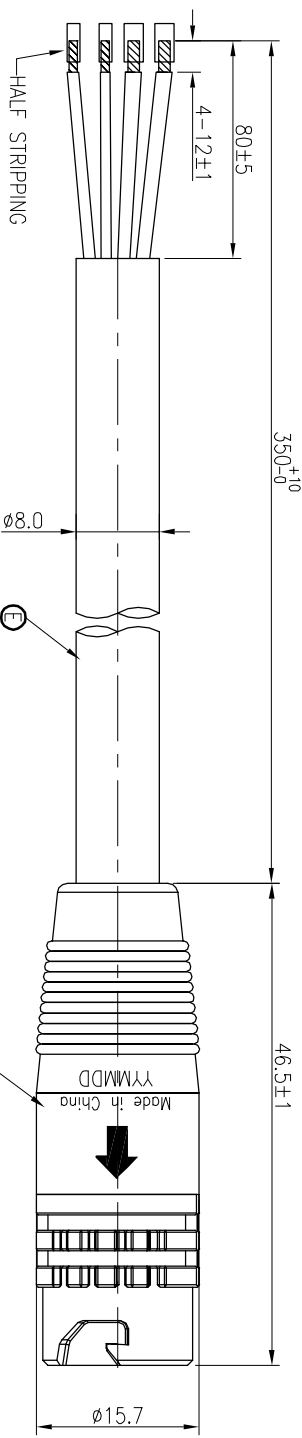

WHITE(24#)	4
BLACK(14#)	3
RED(14#)	2
YELLOW(24#)	1

CUSTOMER P/N	P/N
/	20T3030-W04837H

NOTES:

1. WATERPROOF RATE: IP66/67
2. ELECTRICAL CHARACTERISTICS  
TEMPERATURE RANGE:-40° TO +80°  
TEST CONDITION: DC300V 10Mohm 10ms
3. SPECIFICATIONS:SEE "QUICK SERIES GENERAL SPEC".
4. TO CONFORM TO ROHS REQUIREMENT AND REACH REGULATION
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **6.5.7.14.5**
6. NON-HUMAN FACTORS CAUSE SERVICE LIFE IS 5 YEARS
7. LASE DATE CODE "YYMMDD" ON TOP OF OVER MOLD




E	CABLE	1	UL2464 14#*2C+ 24#*1P 0D8.0	UV RESISTANCE BLACK PVC JACKET
D	INNER MOLD	1	TPEE	NATURAL
C	OVER MOLD	1	TPEE	BLACK
B	FEMALE PIN	4	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES


DECIMALS: ANGLES: X :±0.5 X :±2° X.X :±0.3 X.X :±1' X.XX :±0.2

TITLE	CIRCULAR STANDARD SIZE (QUICK TYPE)
DWN	MALE CONN. FEMALE (2+2)PIN/10+5JA LOCK TYPE
CHKD	Vicky
APVD	William
PART NO.	20T3030-W04837H
SCALE	2:1
SIZE	A3
SHEET	1 OF 1
REV	A

CUSTOMER COPY



Pin Assignments  
Front View

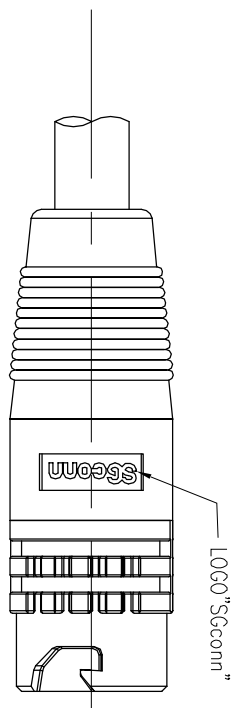

WATERPROOF RATE: IP66/IP67