


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A200724-3A	JAY	2021.05.18

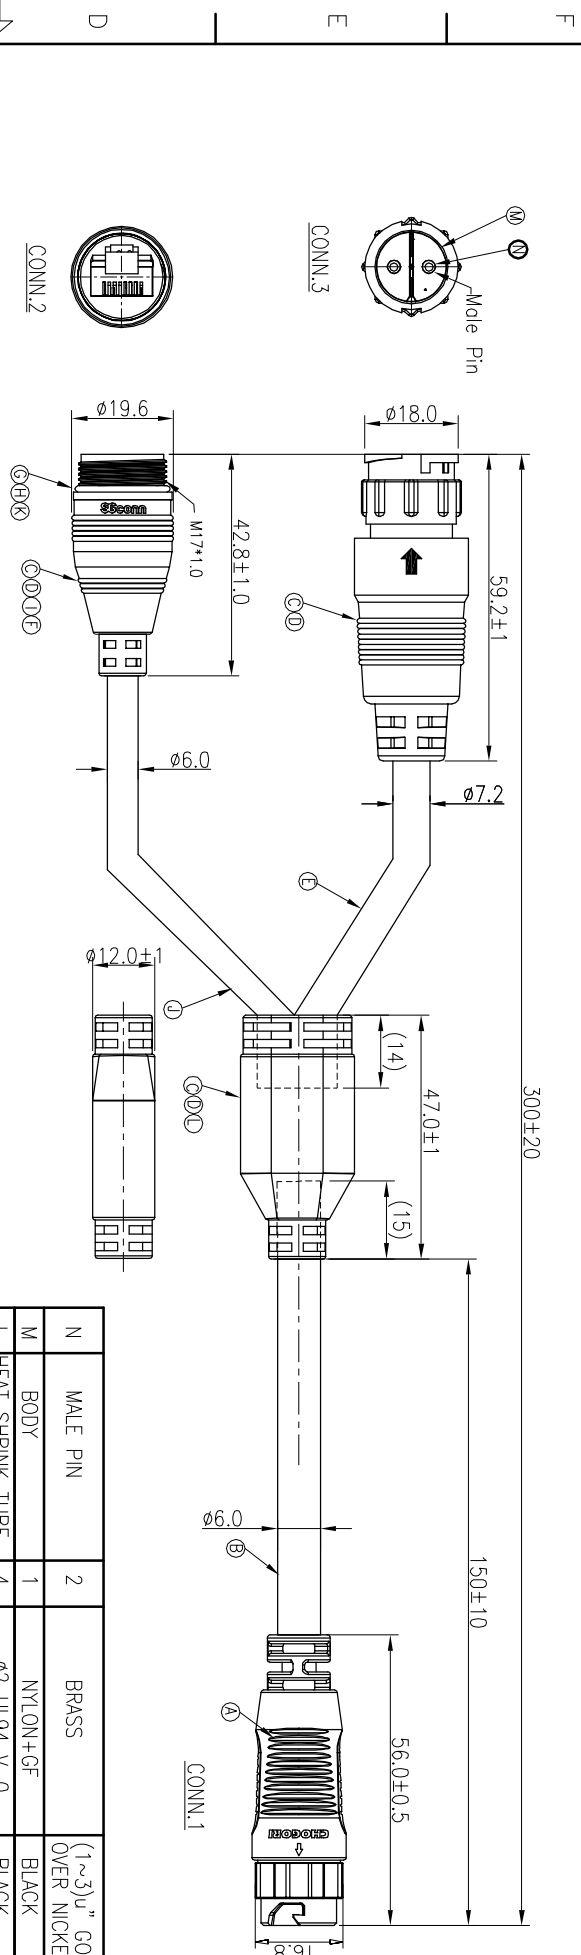

6	导线	N/A	N/A
2	BALCK	GREEN/WHITE(GND)	2
4	RED	N/A	1
3	YELLOW	ORANGE(DMX+)	N/A
5	BLUE	ORANGE/WHITE(DMX-)	N/A
1	WHITE	N/A	N/A
CONN.1	WIRE COLOR	CONN.2	CONN.3
PIN OUT			
CONN.1	WIRE COLOR	CONN.2	CONN.3

NOTES:

1 ELECTRICAL CHARACTERISTICS:


- 1-1 INSULATION RESISTANCE: 10 MΩ. at 500VDC.
- 1-2 BREAKDOWN VOLTAGE: 500 VAC PER MINUTE.
- 1-3 Rated voltage and rated voltages: 125V 1.5A(CONN.2) 60V 10+2A(CONN.1)

2. ENVIRONMENTAL:

- 2-1 OPERATING TEMPERATURE: -20°C TO +80°C.
- 2-2 SEALING REQUIREMENTS: IP67.

3. SPECIFICATIONS:SEE "QUICK SERIES GENERAL SPEC".

- 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- 5. Unhooded tin wire must be used for soldering
- 6.The company's products have been in line with ROHS2.0 standard

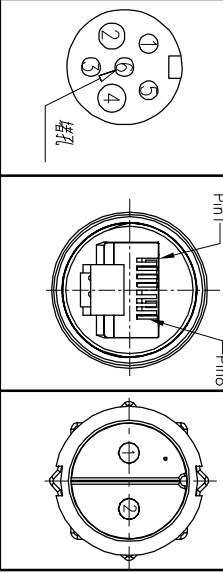

Pin Assignments
Front View

N	MALE PIN	2	BRASS	(1~3)u" GOLD PLATING OVER NICKEL PLATING
M	BODY	1	NYLON+GF	BLACK
L	HEAT SHRINK TUBE	4	ø2 UI94 V-0	BLACK
K	O-RING	1	SILICONE	BLACK
J	CABLE	1	UL CAT5E FTP 24# 4P+D+AL/MY OD:6.0 E188601-1 (UL)	BLACK(PVC JACKET)
I	UV GLUE	1	N/A	NATURAL
H	RJ45+PCB	1	N/A	BLACK
G	HOUSING	1	PC EXL 9330	N/A
F	LIQUID GLUE	1	N/A	BLACK
E	CABLE	1	UL21996 17#*2C+ P+24#*1P(QV) 0072	BLACK (PVC JACKET)
D	INNER MOLD	3	TPPE	NATURAL
C	OVER MOLD	3	TPPE	BLACK
B	CABLE	1	UL2464 5*20AWG*1 黑色PVC线	0D:6.0 红, 黑, 黄, 白, 蓝 防水,抗UV
A	FEMALE CONN.	1	P/N:22204433-04-001	N/A
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES: TITLE (CIRCULAR STANDARD SIZE (QUICK TYPE)

DWN JAY PART NO.2QT3030-W04857H

CHKD JF SCALE 1:1 UNIT: mm

APVD Steve SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY

Suzhou Singtong Auto Electronics CO.,LTD.
苏州同音汽车电子有限公司