

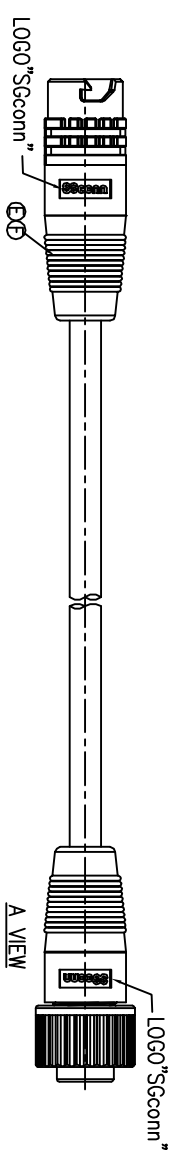


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A171213-1A		Wcky	2017.12.13

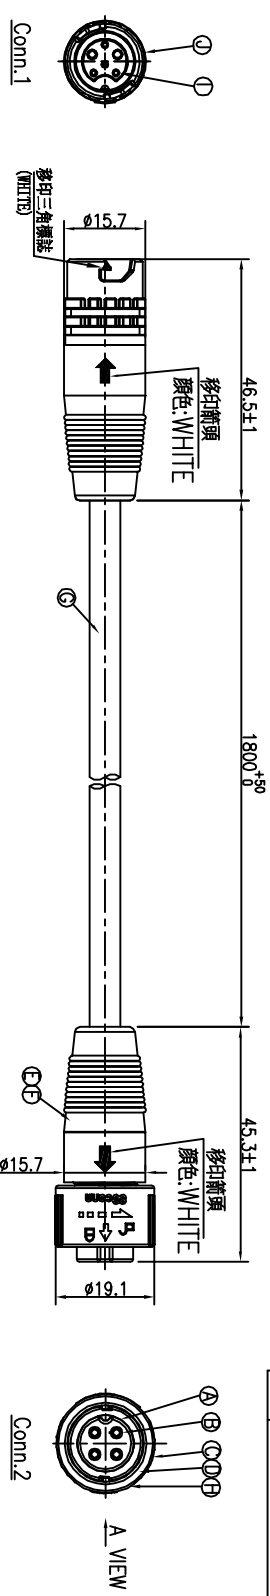

CONN.2	WIRE COLOR	CONN.1
4	YELLOW/GREEN	6
3	BLUE	5
2	BLACK	4
1	RED	3
		2
		1

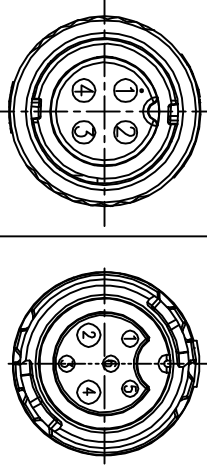

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - 1-1 CURRENT RATING: 10+5 AMPS.
 - 1-2 CONTACT RESISTANCE: 3 Ohm Max.
 - 1-3 INSULATION RESISTANCE: 100 MOhm Min. at 500VDC.
 - 1-4 BREAKDOWN VOLTAGE: 500VAC PER MINUTE.
 - ENVIRONMENTAL:
 - 2-1 OPERATING TEMPERATURE: -30°C TO +60°C.
 - 2-2 SEALING REQUIREMENTS: IP67.
 - LIFE TEST: 1,000 CYCLES MIN.
 - OTHER GENERAL SPEC TO REFER "QUICK SERIES GENERAL SPEC".
 - FOR TECHNICAL DATA REFER TO YOUR LOCAL SINGATRON ELECTRONICS SALES OFFICE.
 - ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

J	PIN	6	PHOSPHOR BRONZE	GOLD PLATING
I	BODY	1	PA66	BLACK
H	SPRING	1	SUS	N/A
G	CABLE	1	0.75mm *4C OD:8.0 (3.10.4634.1.1491) (UV RESISTANT)	BLACK RUBBER JACKET
F	INNER MOLD	2	TPU	NATURAL
E	OVER MOLD	2	TPU	BLACK
D	O-RING	1	SILICONE	BLUE
C	LOCK NUT	1	PC	GRAY
B	FEMALE PIN	4	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

DMW :±0.5 X :±2

CHKD :±0.3 X.X :±1'

APVD :±0.2 X.XX :±0.2

Singatron Enterprise Co., Ltd.
信登企業股份有限公司

TITLE: CIRCULAR STANDARD SIZE (QUICK TYPE)
MALE CONN. FEMALE (2+4) PIN(10+5)A

PART NO.: 2QT93030-W06834H

SCALE: 2:1 UNIT: mm

SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY