

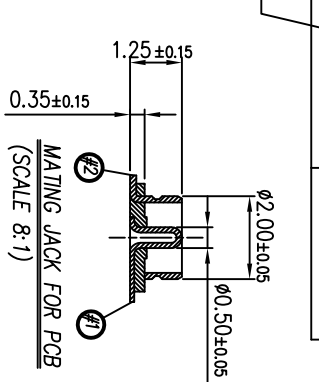
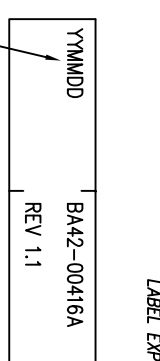
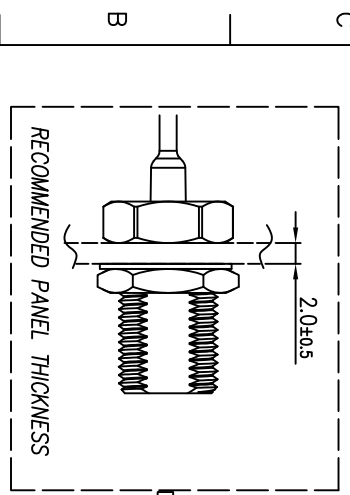
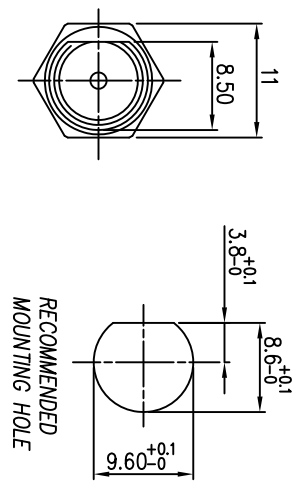


**PART NO.:**  
**2RF1010-015015F**

NO.:	STATEMENT
0	Hold Back
1	STRAIGHT 75Ω
5	ASSEMBLY FOR CABLE+PANEL
0	JACK
15	SERIES NO.
F	HALOGEN FREE

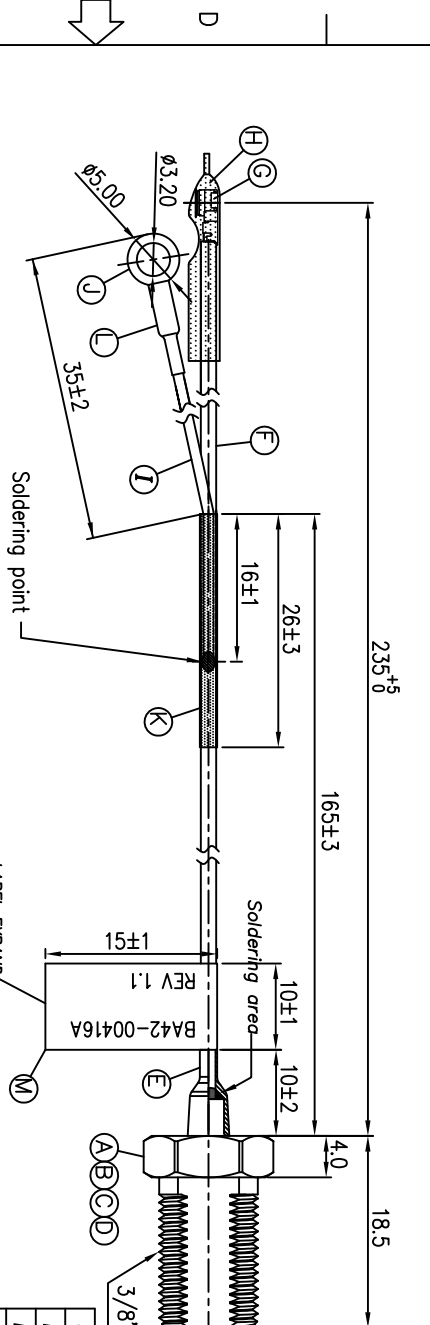

- SPECIFICATIONS:**
1. IMPEDANCE : 75 Ω for NTSC NOMINAL
  2. FREQUENCY RANGE : 0~1 GHz
  3. OTHER GENERAL SPEC. TO REFER "2RF1010-015008F SPEC."
  4. TO CONFORM TO THE SINGATRON HSF SPEC.
  5. PRODUCT IDENTIFICATION LABEL ON PACKAGING:

**MATING JACK FOR PCB**  
(SCALE 8:1)

PIN	FUNCTION
#1	Signal
#2	Ground

**MATING PLUG**

PIN	FUNCTION
#1	Signal
#2	Ground

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO. T120409-6A	PRODUCT RELEASE	BERYL	2012.05.15
B	ECN NO. T120065		BERYL	2012.07.03
C	ECN NO. T120110		BERYL	2012.09.04
D	ECN NO. T130032		JEFF	2013.06.07

QTY	DESCRIPTION	MATERIAL	PLATING & COLOR
1	NUT	BRASS	NICKEL PLATING
1	WASHER	BRASS 0.5t	NICKEL PLATING
1	LABEL	10X30mm	WHITE COLOR
1	HEAT SHRINK TUBE	φ2.5x10L	BLACK COLOR
1	HEAT SHRINK TUBE	φ2.5x26L	BLACK COLOR
1	O-TERMINAL	OD: 5 ; ID: 3.2	MAAT. TIN PLATING
1	WIRE	UL10368 26AWG	TRANSPARENT COLOR
1	PROTECT TUBE	φ3.0x20L	BLACK COLOR
1	Micro Coaxial Conn.	(50 ohm)BRASS	GOLD PLATING
1	WIRE	φ1.37 Coaxial Cable	GRAY COLOR
1	HEAT SHRINK TUBE	φ2.5x10L	BLACK COLOR
1	COPPER STOPPER	BRASS	NICKEL PLATING
1	CENTER CONTACT	BRASS	NICKEL PLATING
1	INSULATOR	TEFLON	WHITE COLOR
1	COPPER BODY	BRASS	NICKEL PLATING

DECIMALS:	ANGLES:
X : ±0.5	X : ±2°
X.X : ±0.3	X.X : ±1°
X.XX : ±0.2	

**UNLESS OTHERWISE SPECIFIED TOLERANCES**

**DECMALS:** X : ±0.5  
X.X : ±0.3  
X.XX : ±0.2

**ANGLES:** X : ±2°  
X.X : ±1°

Singatron Enterprise Co., Ltd.  
信音企業股份有限公司

**Cable Assembly(F)**

DRAWN	JTF 2013/7	PART NO. 2RF1010-015015F
CHKD	APVD	SCALE 2:1 UNIT: mm
APVD	APVD	SIZE: A3 SHEET: 1 OF 1 REV: D

**CUSTOMER COPY**