


DETAIL A

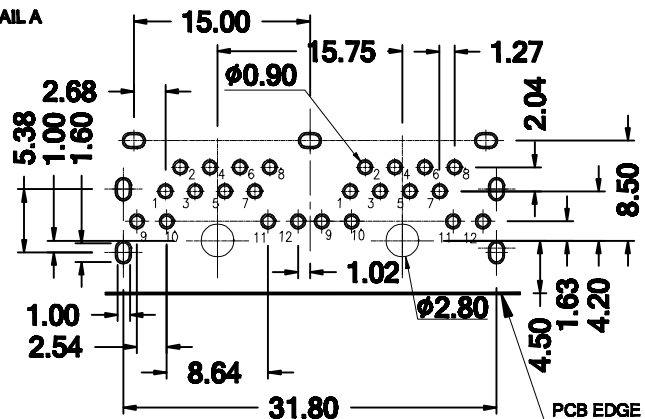

PCB LAYOUT / TOP VIEW

c	LED1	LED2
9	10	11
1	Yellow	Green
2	Green	Yellow

MATERIAL & FINISH

Housing & Insert: PBT, UL94V-0, black

Conductor: Phosphor bronze, t=0.30mm

Plating: Gold plated over nickel on contact area,
Tin plated over nickel on soldering area.

Shield: Brass with nickel plated.

MECHANICAL SPECIFICATION

Durability: 750 cycles min

Operation Temperature: 0°C to 70°C

Storage Temperature: -40°C to 85°C

ORDERING INFORMATION

2RJ-S 130 G2 N 8P 8C a BK - b

Gold Plating
GF - GFμ"
03 - 03μ"
06 - 06μ"
15 - 15μ"
30 - 30μ"
50 - 50μ"

LED Options
see chart

Singatron Enterprise Co., Ltd.

TITLE	RJ 45 (2 Port)		
DWN	PART NO.	2RJ-S130G2N8P8C	BK
CHKD	SCALE	1:1	UNIT: mm
APVD	SIZE: A3	SHEET: 1 OF 1	REV:
CUSTOMER COPY			

Unit: m/m
Tol: ±0.25 unless otherwise stated