
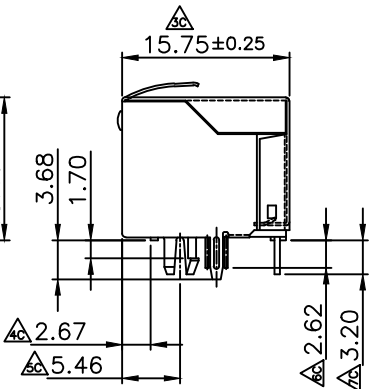





1 2 3 4 5 6

A

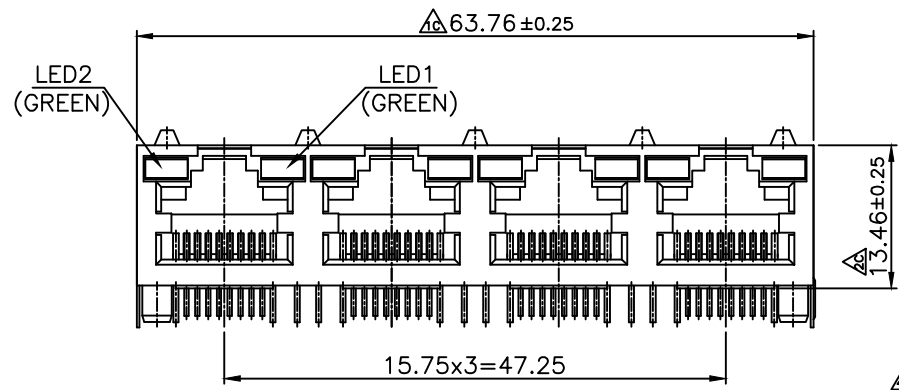

MATERIALS:
PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.
CONTACTS: PHOSPHOR BRONZE
PLATING: GOLD FLASH OVER NICKEL IN CONTACT,
TIN PLATING OVER NICKEL IN SOLDER AREA.
SHIELD: BRASS PLATING NICKEL/LEAD ALLOY.

B

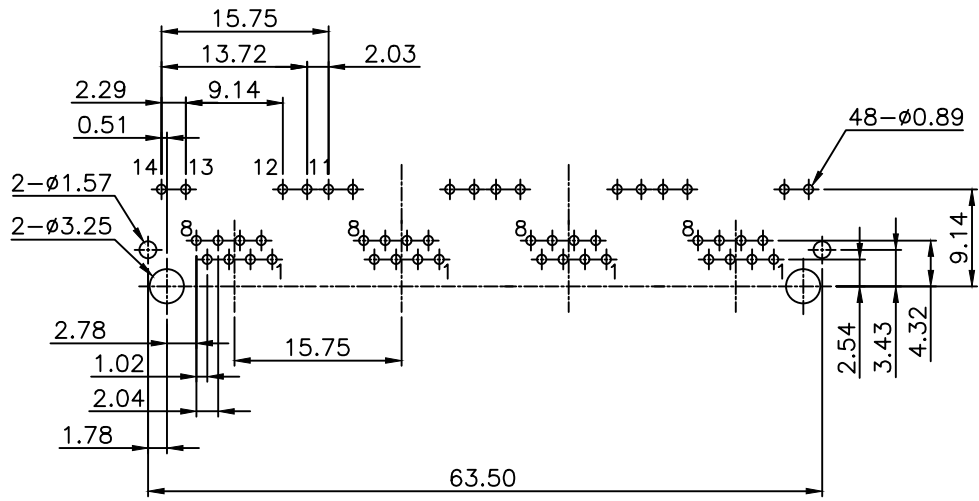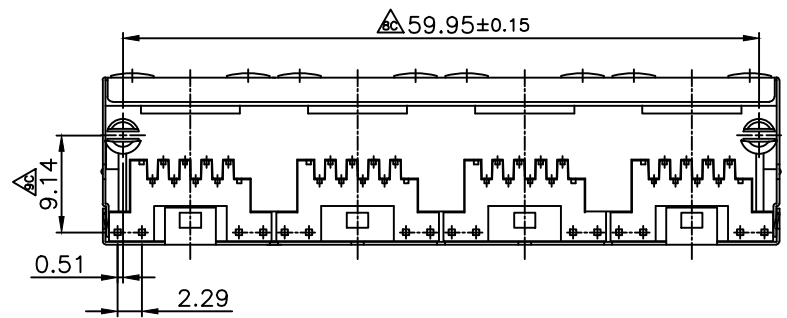

P.C.B LAYOUT/TOP VIEW

Electrical:
1.Voltage Rating:125 Vac Rms.
2.Current Rating:1.5 Amp.
3.Contact Resistance:40 Milliohms Max.
4.Insulation Resistance:1000 Megohms Min @500 Vdc.
5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.
Mechanical:
1.Operating:750 Cycles Min.
Environmental:
1.Storage:-40°C To +85°C.
2.Opeirtion:-20°C To +75°C.
Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

D

			SINGATRON (U.S.A.)			
			UNIT	SCALE	SHEET	TITLE :
			mm	2/1	1 of 1	8P8C JACK 4PORT W/LED(G-G)
			DRAWN BY		APPROVED BY	
			Alan		Alan	
			110103		110103	
			General tolerance			
			.xxx ±0.10		DRAW NO :	
			.xx ±0.25			
			.x ±0.38			
			x ±0.50			
			ANG ±3°			
REV	DESCRIPTION	DATE	2RJ099-04140217			REV. A

1 2 3 4 5 6

A

B

C

D