

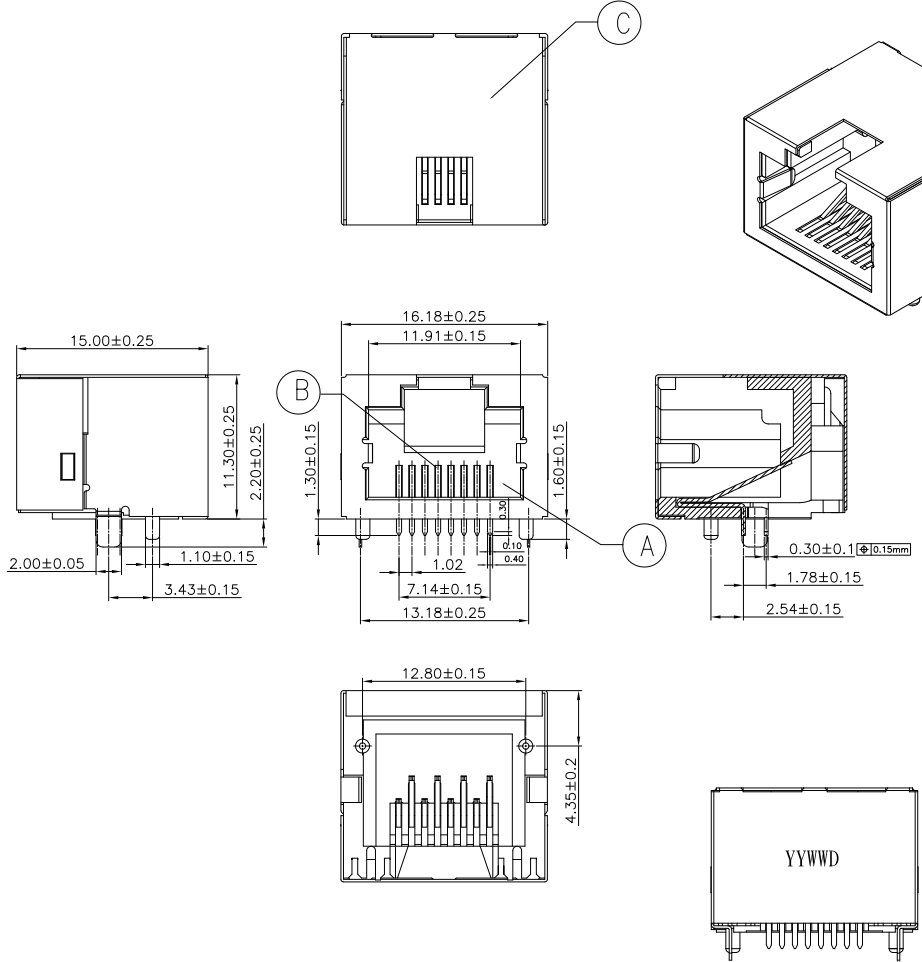


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	IVY-C	2016.09.21
B	ECN NO: L170110	EVEN	2017.11.20
C	ECN NO: L202102-C01	EVEN	2021.03.16

SPECIFICATIONS:

- CURRENT RATING: 1.5 AMP MAX.
- VOLTAGE RATING: 150 VAC MAX.
- INSULATION RESISTANCE: 1000M OHMS MIN.
- DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC 60Hz 1 MINUTE.
- DURABILITY: 5,000 CYCLES MIN.
- OPERATING TEMPERATURE: -30°C TO +85°C.
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- PACKAGE: SEE "2RJ1544-001313F PACKAGE."
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
- OTHER GENERAL SPEC. TO REFER "2RJ1544-001313F SPEC".



PART NO.

2RJ1544-001313F

LED
0. WITHOUT LED

TERMINAL TAIL LENGTH:

1. 1.30mm

SUFFIX: HALOGEN FREE PACKAGE
3: TAPE & REEL (For Quanta)
HOUSING COLOR
1: BLACK

CONTACT AREA PLATING
3: GOLD FLASH PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER AREA

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
C	SHELL	1	C2680-H	NICKEL
B	CONTACT	8	C5210-EH	SEE PART NO.
A	HOUSING	1	PA-10T UL 94V-0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES		信音科技(香港)有限公司			
DECIMALS:	ANGLES:	TITLE	RJ45 JACK, SIDE ENTRY, WITH SHELL		
X :±0.5	X :±2°	DWN	EVEN 2021.03.16	PART NO. 2RJ1544-001313F	
X.X :±0.3	X.X :±1°	CHKD		SCALE 1:1	UNIT: mm
X.XX :±0.2		APVD	ANGELA 2021.03.16	SIZE: A3	SHEET: 1 OF 1
CUSTOMER COPY					
				REV: C	