


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	IVY-C	2016.07.26



SPECIFICATIONS:

1. CURRENT RATING: 1.5 AMP MAX.
2. VOLTAGE RATING: 150 VAC MAX.
3. INSULATION RESISTANCE: 1000M OHMS MIN.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC 60Hz 1 MINUTE.
5. DURABILITY: 5,000 CYCLES MIN.
6. OPERATING TEMPERATURE: -30°C TO +70°C.
7. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
8. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
9. PACKAGE: SEE "2RJ1544-124312F" PACKAGE.
10. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
11. MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
12. OTHER GENERAL SPEC. TO REFER "2RJ1544-124312F SPEC".

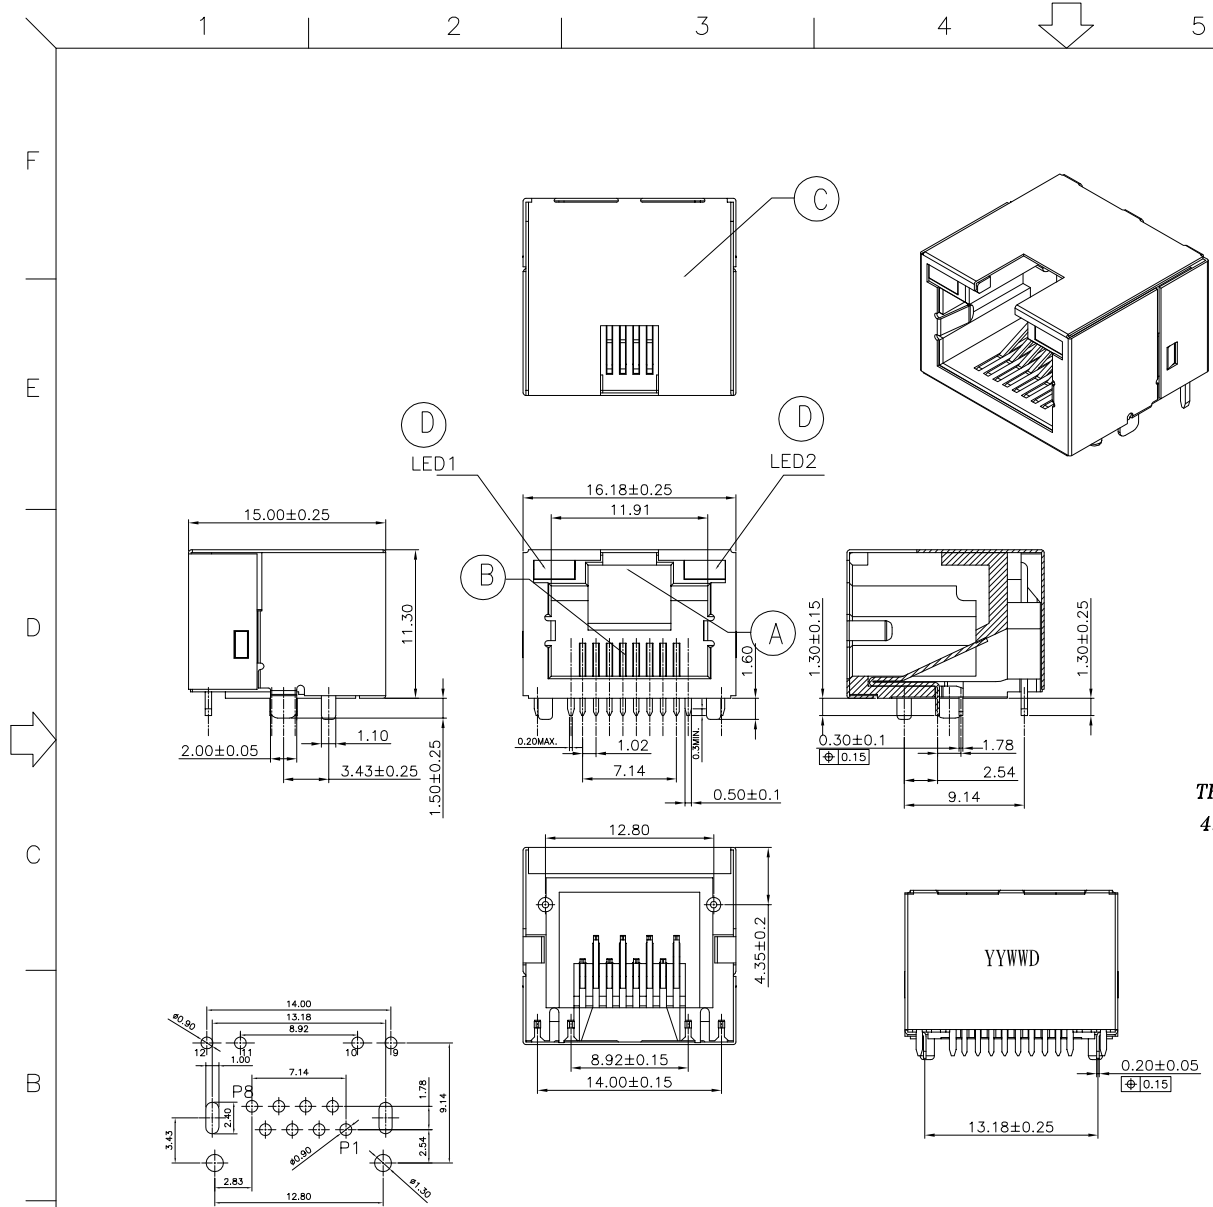

PART NO.

2RJ1544-124312F


- LED _____
- 2. LED1: GREEN/ORANGE
- LED2: YELLOW

TERMINAL&SHELL TAIL LENGTH:

- 4. TERMINAL-1.30mm
- SHELL-1.50mm

- SUFFIX: HALOGEN FREE
- PACKAGE
- 2: TAPE & REEL
- HOUSING COLOR
- 1: BLACK

- CONTACT AREA PLATING
- 3: GOLD FLASH PLATED ON CONTACT AREA, TIN PLATED ON SOLDER AREA



LED ELECTRICAL CHARACTERISTIC		
NOTE	COLOR	
12(+)	11(-)	LED1: GREEN+ORANGE
10(-)	9(+)	LED2: YELLOW

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
D	LED	2	GREEN/ORANGE, YELLOW	TIN PLATED
C	SHELL	1	BRASS	NICKEL
B	CONTACT	8	PHOSPHOR BRONZE	SEE PART NO.
A	HOUSING	1	PA10T, UL 94V-0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS:	ANGLES:	TITLE	RJ45 JACK, SIDE ENTRY, LED, WITH SHELL
X :±0.5	X :±2°	DWN	IVY-C 2016.07.26 PART NO. 2RJ1544-124312F
X.X :±0.3	X.X :±1°	CHKD	ANGELA2016.07.26 SCALE 1:1 UNIT: mm
X.XX :±0.2		APVD	ANGELA2016.07.26 SIZE: A3 SHEET: 1 OF 1 REV: A
CUSTOMER COPY			