REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	IVY-C	2011.11.30
B	ECN NO:L110158	IVY-C	2011.12.29
C	ECN NO:L120003	IVY-C	2012.02.06
D	ECN NO:L120013	IVY-C	2012.02.22
E	ECN NO:L120165	IVY-C	2013.01.04



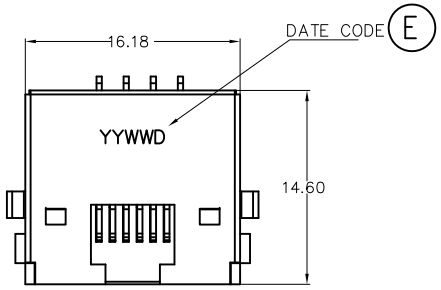

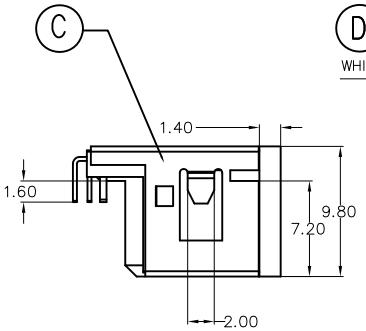

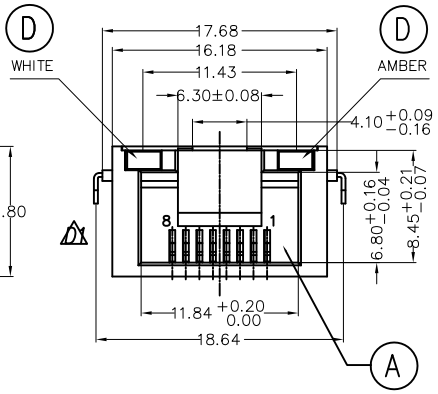



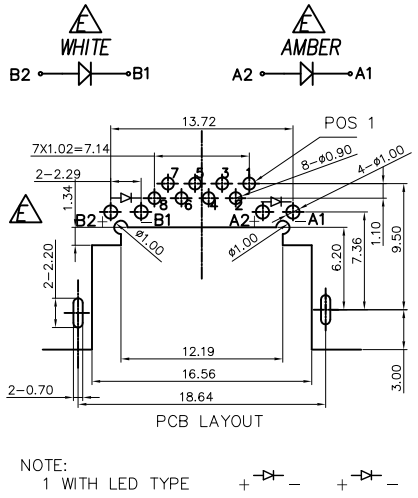

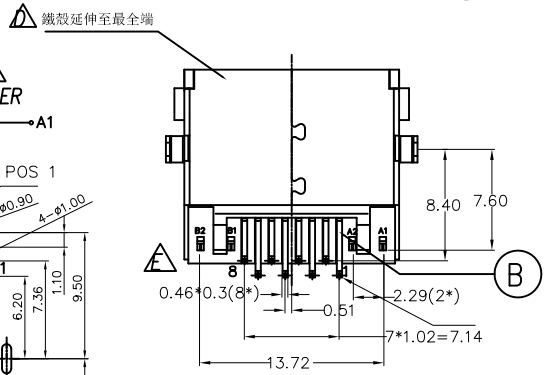

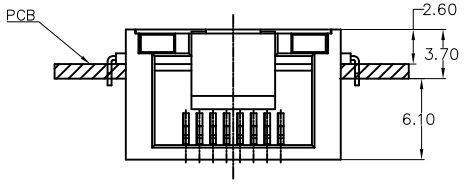

SPECIFICATIONS:

1. VOLTAGE RATING: 150 VAC MAX.
2. CURRENT RATING: 1.5 AMP MAX.
3. INSULATION RESISTANCE: 1000M OHMS MIN. AT 500 VDC.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC 60Hz 1 MINUTE.
5. DURABILITY: 5000 CYCLES MIN.
6. OPERATING TEMPERATURE: −30℃ TO +70℃.
7. OTHER GENERAL SPEC. TO REFER "2RJ1566 SERIES" SPEC.
8. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
9. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
10. PACKAGE: SEE "2RJ1566 SERIES" PACKAGE.
11. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
12. MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
13. LED TYPE:1.35*3.5*6.8mm.
14. AMBER :600~612nm IF=30mA.

PART NO.

2RJ1566-000111F

- **SUFFIX: HALOGEN FREE**
- **PACKAGE**
  1: TAPE AND REEL
- **HOUSING COLOR**
  1: BLACK
- **CONTACT AREA PLATING**
  1: GOLD FLASH ON CONTACT AREA, MATTE SN PLATING ON SOLDER AREA
- **LED OPTIONAL**
  0: L:WHITE ; R:AMBER

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
E	INK			BLACK
D	LED	2	LED	WHITE / AMBER
C	SHIELD	1	STAINLESS STEEL	NICKEL
B	CONTACT	8	PHOSPHOR BRONZE	SEE PART NO.
A	HOUSING	1	HI-TEMP THERMOPLASTIC, UL 94V-0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:
X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

TITLE	RJ45 JACK, W/LEDX2 DIP, SINKING TYPE, H.F			
DWN	IVY-C 2013.01.04	PART NO. 2RJ1566-000111F		
CHKD	DAVID-T 2013.01.04	SCALE2.5:1	UNIT: mm	
APVD	DAVID-T 2013.01.04	SIZE: A3	SHEET:1 OF 1	REV: E

CUSTOMER COPY

文件編號 RD-06-043-A