REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	EVEN	2019.05.31

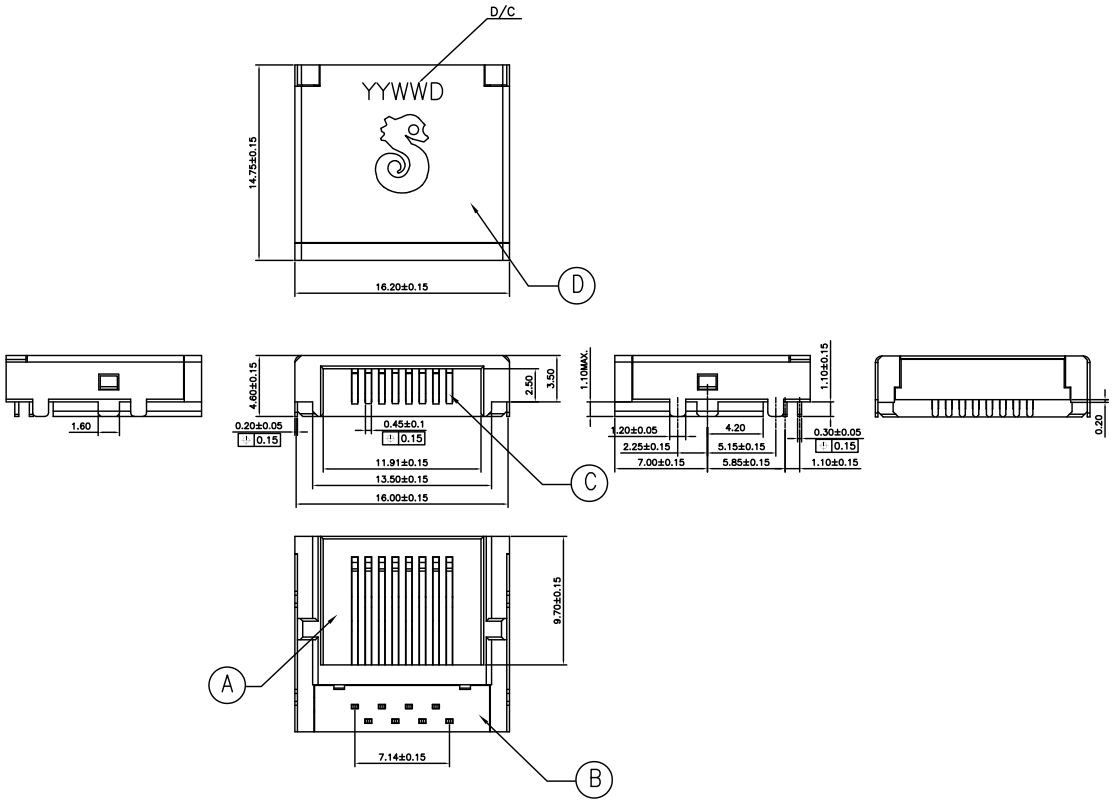

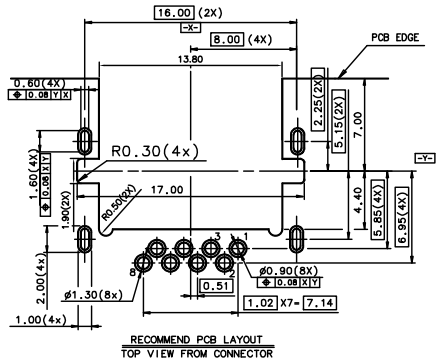

1.RECOMMENDED PCB THICKNESS: 1.20±0.05 mm.
2.DIMENSION TOLERANCE: .XX±0.05

SPECIFICATIONS:

1. VOLTAGE RATING: 150 VAC MAX.
2. CURRENT RATING: 1.5 AMP MAX.
3. INSULATION RESISTANCE: 1000M OHMS MIN.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC 60Hz 1 MINUTE.
5. DURABILITY: 750 CYCLES MIN.
6. OPERATING TEMPERATURE: −30°C TO +70°C.
7. OTHER GENERAL SPEC. TO REFER "2RJ1569−001111F SPEC".
8. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
9. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
10. PACKAGE: SEE "2RJ1569−001111F" PACKAGE.
11. FOR REFLOW SOLDERING LEAD−FREE PROCESS.
12. MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NO.
2RJ1569−001111F

- **SUFFIX: HALOGEN FREE**
- **PACKAGE**
  1: TAPE&REEL
- **HOUSING COLOR**
  1: BLACK
- **CONTACT AREA PLATING**
  1: GOLD FLASH ON CONTACT AREA, TIN PLATING ON SOLDER AREA NICKEL UNDERPLATED OVER ALL

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
D	SHELL	1	SUS 304	50−100u" NICKEL
C	CONTACT	8	C5210	SEE PART NO
B	COVER	1	PA10T UL 94V−0	BLACK
A	HOUSING	1	PA10T UL 94V−0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: X :±0.5, X.X :±0.3, X.XX :±0.2
ANGLES: X :±2°, X.X :±1°

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

TITLE	RJ45 JACK W/O LED, DIP, R/A		
DWN	EVEN 2019.05.31	PART NO. 2RJ1569−001111F	
CHKD		SCALE 1:1	UNIT: mm
APVD	ANGELA2019.05.31	SIZE: A3	SHEET:1 OF 1

REV:A

CUSTOMER COPY

文件編號: RD−06−043−A