

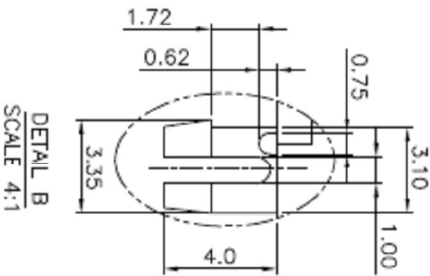
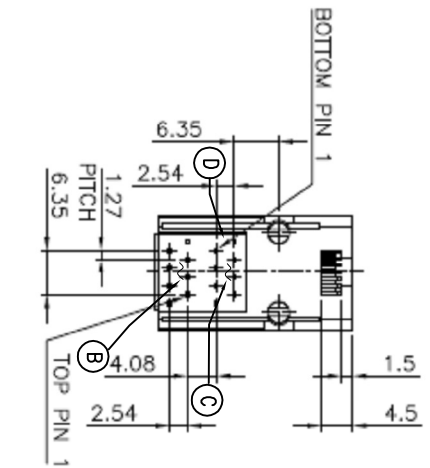


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	NY-C	2012.02.06	
B	ECN NO: L190083	NY-C	2019.09.04	

- SPECIFICATIONS:**
- VOLTAGE RATING: 150 VAC.
 - CURRENT RATING: 1.0 AMPS.
 - CONTACT RESISTANCE: 40mΩ MAX.(INITIAL)
 - INSULATION RESISTANCE: 500MΩ MIN. @ 500V DC.(INITIAL)
 - DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC 60Hz 1MINUTE.
 - DURABILITY: 750 CYCLES MIN.
 - OPERATING TEMPERATURE: -40°C TO +85°C.
 - OTHER GENERAL SPEC. TO REFER "2RJ1574 SERIES" SPEC.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**
 - PACKAGE: SEE "2RJ1574 SERIES" PACKAGE.
 - FOR WAVE SOLDERING LEAD-FREE PROCESS. 260°C 5~10SEC.
 - MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

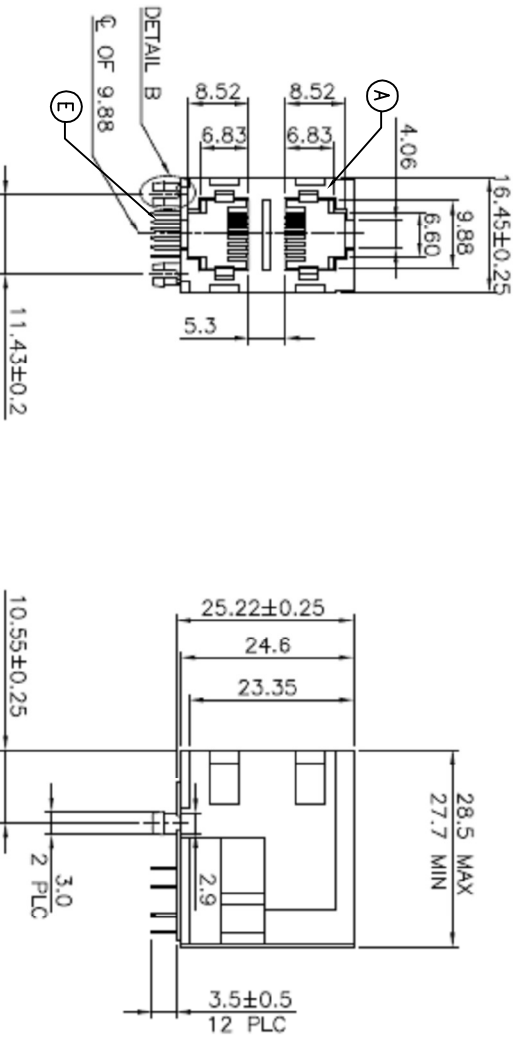

DETAIL B
SCALE 4:1

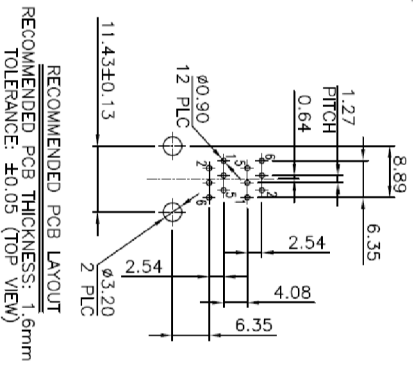

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ±0.05 (TOP VIEW)

PART NO.
2RJ1574-000111H

- SUFFIX: HALOGEN
- PACKAGE 1: TRAY
- HOUSING COLOR 1: BLACK
- CONTACT PLATING
- MATING AREA: 6u" GOLD PLATING ON CONTACT AREA,
- SOLDER AREA: GOLD FLASH, NICKEL UNDERPLATED.

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
E	CONTACT	12	USA SINGATRON P/N: 3733-66021	
D	COVER	1	PHOSPHOR BRONZE	SEE PART NO.
C	BOTTOM INSERT HS'G	1	THERMOPLASTIC(U94V-0)	BLACK
B	TOP INSERT HS'G	1	THERMOPLASTIC(U94V-0)	BLACK
A	HOUSING	1	THERMOPLASTIC(U94V-0)	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信登企業股份有限公司

DECIMALS: ±0.5 X ±0.3 X.XX ±0.2

TITLE 2X1 (2PORS) 6POSITIONS, RIGHT ANGLE PCB JACK
DWG NY-C 2019.09.04 PART NO. 2RJ1574-000111H
CHKD AMEN 2019.09.04 SCALE:2:1 UNIT: mm
APVD AMEN 2019.09.04 SIZE: A3 SHEET:1 OF 1 REV: B

CONTACT PLATING

CUSTOMER COPY