

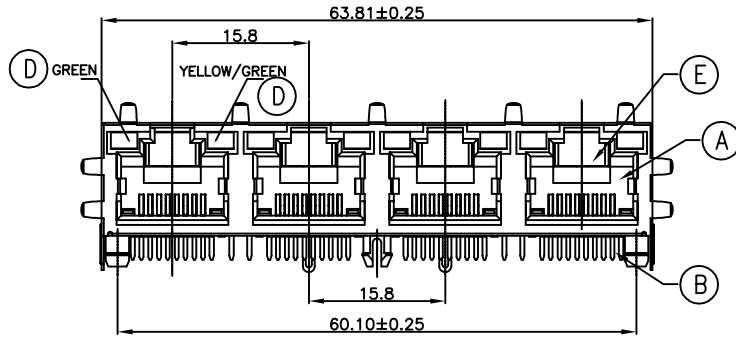


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	IVY-C	2014.11.03

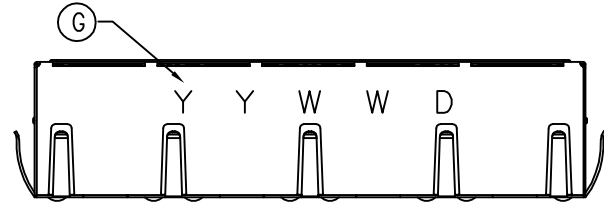

SPECIFICATIONS:

- VOLTAGE RATING: 125 VAC MAX.
- CURRENT RATING: 1.5 AMP MAX.
- INSULATION RESISTANCE: 1000M OHMS MIN. AT 500 VDC.
- DIELECTRIC WITHSTANDING VOLTAGE: 750 VAC 60Hz 1 MINUTE.
- DURABILITY: 750 CYCLES .
- OPERATING TEMPERATURE: -40°C TO +85°C.
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**
- PACKAGE: SEE "2RJ1620-010111H" PACKAGE.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
- OTHER GENERAL SPEC. TO REFER "2RJ1620-010111H SERIES SPEC".

PART NO.
2RJ1620-010111H



SUFFIX: HALOGEN

PACKAGE
1: TRAY


HOUSING COLOR
1: BLACK

CONTACT AREA PLATING
1: 6u" Au ON CONTACT AREA,
TIN PLATING ON SOLDER AREA

LED OPTIONAL
1: LED2: GREEN; LED1: YELLOW/GREEN

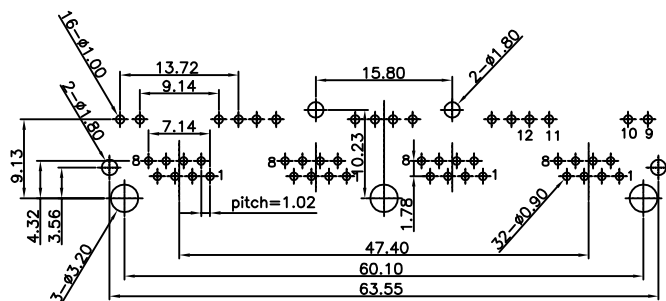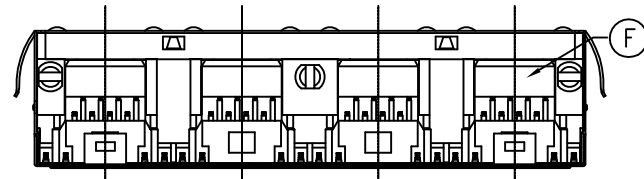

PCB Layout
Component Side Shown



G	INK			BLACK
F	INSERT	4	FR52 UL 94V-0	BLACK
E	COVER	4	FR52 UL 94V-0	BLACK
D	LED	8	LED	SEE PART NO.
C	SHIELD	1	COPPER ALLOY	NICKEL
B	CONTACT	32	COPPER ALLOY	SEE PART NO.
A	HOUSING	1	FR52 UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

DECIMALS:	ANGLES:	TITLE	RJ45 JACK, W/SHIELDED, W/LED, DIP TYPE,(1X4)		
X :±0.5	X :±2°	DWN	NY-C 2014.11.03	PART NO. 2RJ1620-010111H	
X.X :±0.3	X.X :±1°	CHKD	SCALE 2:1	UNIT: mm	REV: A
X.XX :±0.2		APVD	ANGELA2014.11.03	SIZE: A3	SHEET:1 OF 1

CUSTOMER COPY