
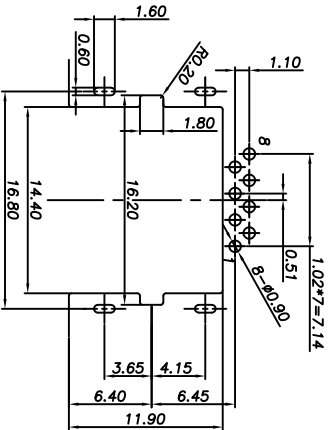

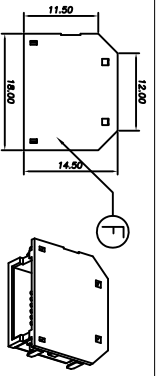

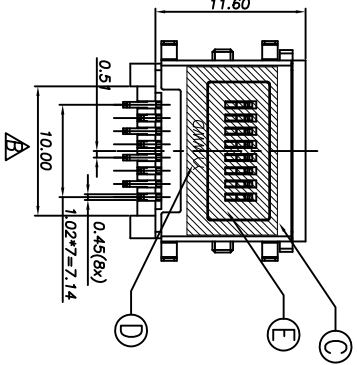








REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR	RELEASE	NY-C	2012.09.07
B	ECN NO:120151		NY-C	2012.12.13



WITH CAP DRAWING (SCALE 1.5:1)

SPECIFICATIONS:

- VOLTAGE RATING: 150 VAC MAX.
- CURRENT RATING: 1.5 AMP MAX.
- INSULATION RESISTANCE: 1000M OHMS MIN. AT 500 VDC.
- DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC 60Hz 1 MINUTE.
- DURABILITY: 5000 CYCLES.
- OPERATING TEMPERATURE: -30°C TO +70°C.
- OTHER GENERAL SPEC. TO REFER "2R1622 SERIES SPEC".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING.
- PACKAGE: SEE "2R1622 SERIES" PACKAGE.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.



PART NO.

2R1622-000X11F

- SUFFIX: HALOGEN FREE
- PACKAGE
- 1: TAPE AND REEL
- HOUSING COLOR
- 1: BLACK

- CONTACT AREA PLATING
- 1: GOLD FLASH ON CONTACT AREA, TIN PLATING ON SOLDER AREA.
- 2: 30u" Au PLATING ON CONTACT AREA, TIN PLATING ON SOLDER AREA.

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
F	CAP	1	HIGH-TEMP. THERMO-PLASTIC, UL 94V-0	BLACK
E	MYLAR	1	KAPTON FILM	YELLOW
D	INK	-		BLACK
C	SHIELD	1	STAINLESS STEEL	NICKEL
B	CONTACT	8	COPPER ALLOY	SEE PART NO.
A	HOUSING	1	HIGH-TEMP. THERMO-PLASTIC, UL 94V-0	BLACK

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

TITLE	REV.	DATE	SCALE	UNIT	MM	REV.
APVD	1	2012.12.13	A3	mm		B



Singatron Enterprise Co., Ltd.
信音企業股份有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCES

RECOMMENDED PCB LAYOUT (TOP VIEW)

TOLERANCE:±0.05mm, THICKNESS:1.0mm

CUSTOMER COPY