



- SPECIFICATIONS:**
- VOLTAGE RATING: 125 VAC MAX.
 - CURRENT RATING: 1.5 AMP MAX.
 - INSULATION RESISTANCE: 1,000M OHMS MIN. AT 500 VDC.
 - DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC 60Hz 1 MINUTE.
 - DURABILITY: 750 CYCLES.
 - OPERATING TEMPERATURE: -40°C TO +85°C.
 - OTHER GENERAL SPEC. TO REFER "2RJ1663 SERIES SPEC."
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING.
 - PACKAGE: SEE "2RJ1663-000211F" PACKAGE.
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

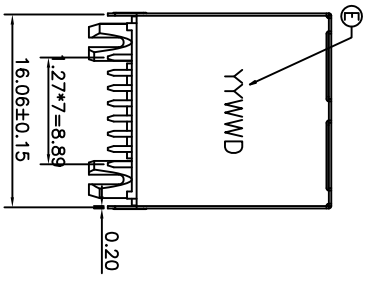

PART NO.
2RJ1663-000211F

- SUFFIX: HALOGEN FREE**
- PACKAGE 1: TAPE & REEL
 - HOUSING COLOR 1: BLACK
 - CONTACT AREA PLATING 2: GOLD 5u" PLATING ON CONTACT AREA, 100~200u" MATTE TIN PLATING ON SOLDER AREA, 50u" MIN NICKEL UNDERPLATED OVERALL.

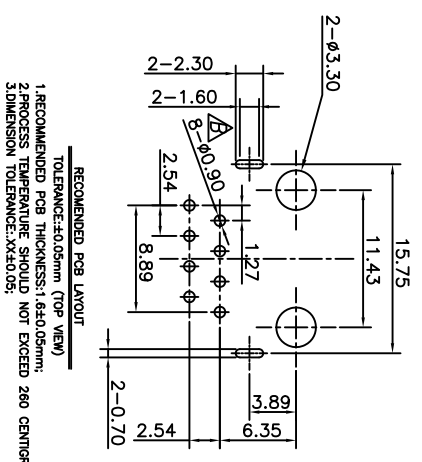

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
E	INK			BLACK
D	SHIELD	1	SUS 201	30~80u" NICKEL PLATED
C	CONTACT	8	C5210	SEE PART NO.
B	INSERT	1	PA10T UL 94V-0	BLACK
A	HOUSING	1	LCP UL 94V-0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES: X :±2
X.X :±0.3 X.X :±1°
X.XX :±0.2

Singatron Enterprise Co., Ltd.
信登企業股份有限公司

TITLE R45 898C JACK, VERTICAL, W/SHIELD, DIP TYPE, H=17.02mm
DWG IN-C 20160315
CHKD IN-C 20160315
APVD IN-C 20160315
SCALE 3/1 UNIT: mm
SIZE: A3 SHEET: 1 OF 1 REV: B

CUSTOMER COPY