
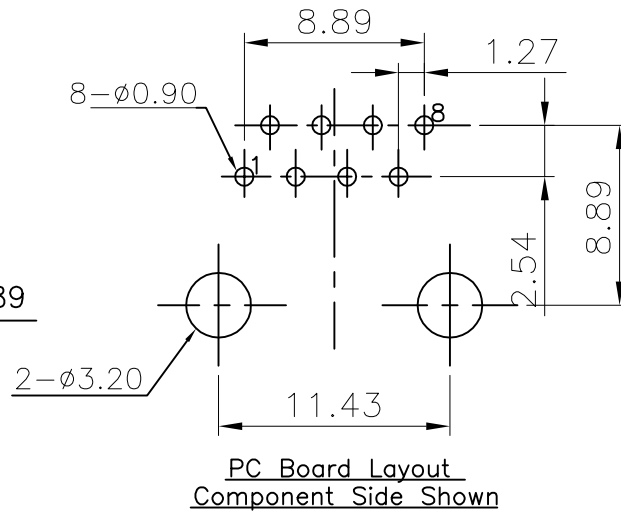
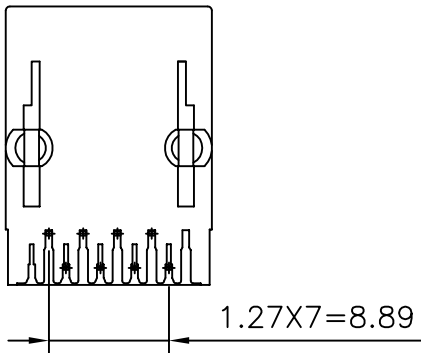
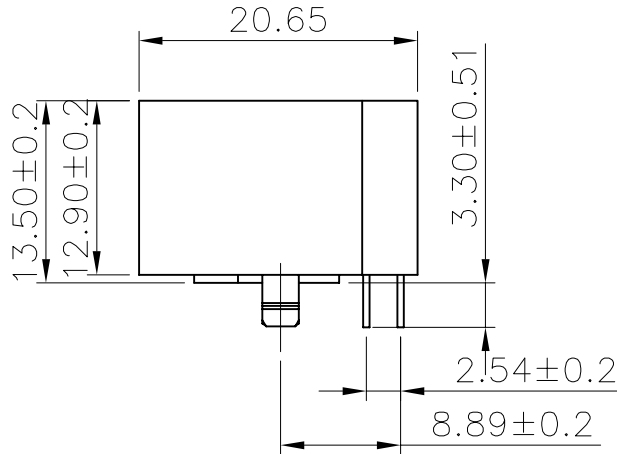
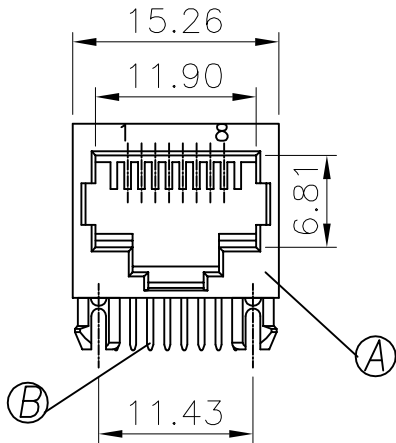


1 2 3 4 5 6 7 8

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	IVY-C	2015.02.09



SPECIFICATIONS:

- VOLTAGE RATING: 125 VAC MAX.
- CURRENT RATING: 1.5 AMP MAX.
- INSULATION RESISTANCE: 1000MΩ MIN. @ 500V DC
- DIELECTRIC WITHSTANDING VOLTAGE: 750 VAC 60Hz 1 MINUTE.
- DURABILITY: 750 CYCLES .
- OPERATING TEMPERATURE: -40°C TO +85°C.
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- PACKAGE: SEE "2RJ1719 SERIES" PACKAGE.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- OTHER GENERAL SPEC. TO REFER "2RJ1719 SERIES SPEC".



PART NO.

2RJ1719-000111F

SUFFIX: HALOGEN FREE

PACKAGE

1: TRAY

HOUSING COLOR

1: BLACK

CONTACT PLATING

- 1: GOLD FLASH PLATING ON CONTACT AREA, TIN(100~200u") PLATING ON SOLDER AREA. NICKEL(50u" MIN.) PLATING UNDERPLATED OVERALL.

C	INK			BLACK COLOR
B	CONTACT	8	C5210-EH, 0.3t	SEE PART NO.
A	HOUSING	1	FR52 HF BK UL94V-0	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS:	ANGLES:	TITLE RJ45 PHONE JACK , DIP TYPE		
X :±0.5	X :±2°	DWN	NY-C 2015.02.09	PART NO. 2RJ1719-000111F
X.X :±0.3	X.X :±1°	CHKD	ANGELA2015.02.09	SCALE:1:1 UNIT: mm
X.XX :±0.2		APVD	ANGELA2015.02.09	SIZE: A3 SHEET:1 OF 1 REV: A
CUSTOMER COPY				