
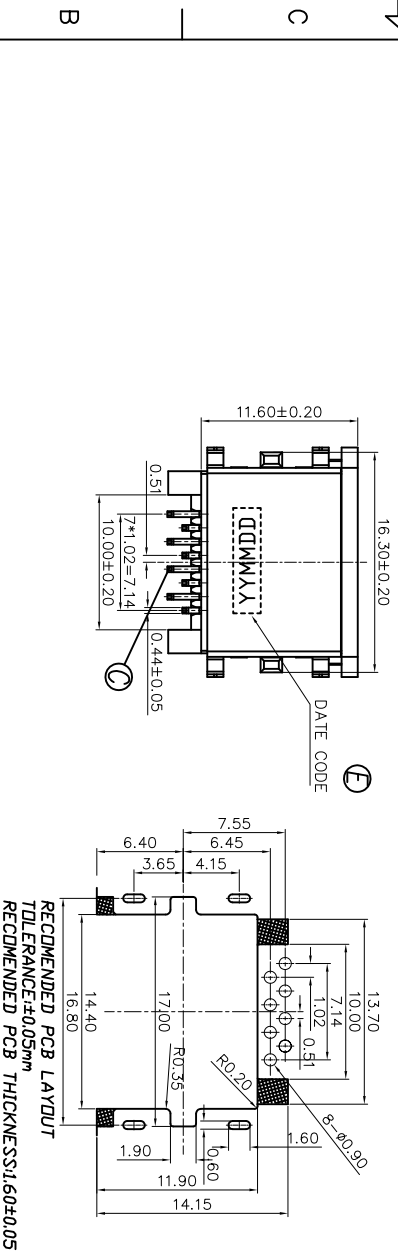



REV/ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	INV-C	2014.09.18
B	ECN NO:140126	INV-C	2014.10.15

SPECIFICATIONS:

- VOLTAGE RATING: 150 VAC MAX.
- CURRENT RATING: 1.5 AMP MAX.
- INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC
- DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC 60Hz 1 MINUTE.
- DURABILITY: 5000 CYCLES
- OPERATING TEMPERATURE: -30°C TO +85°C.
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING.
- PACKAGE: SEE "2RJ1724 SERIES" PACKAGE.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
- OTHER GENERAL SPEC. TO REFER "2RJ1724 SERIES SPEC".

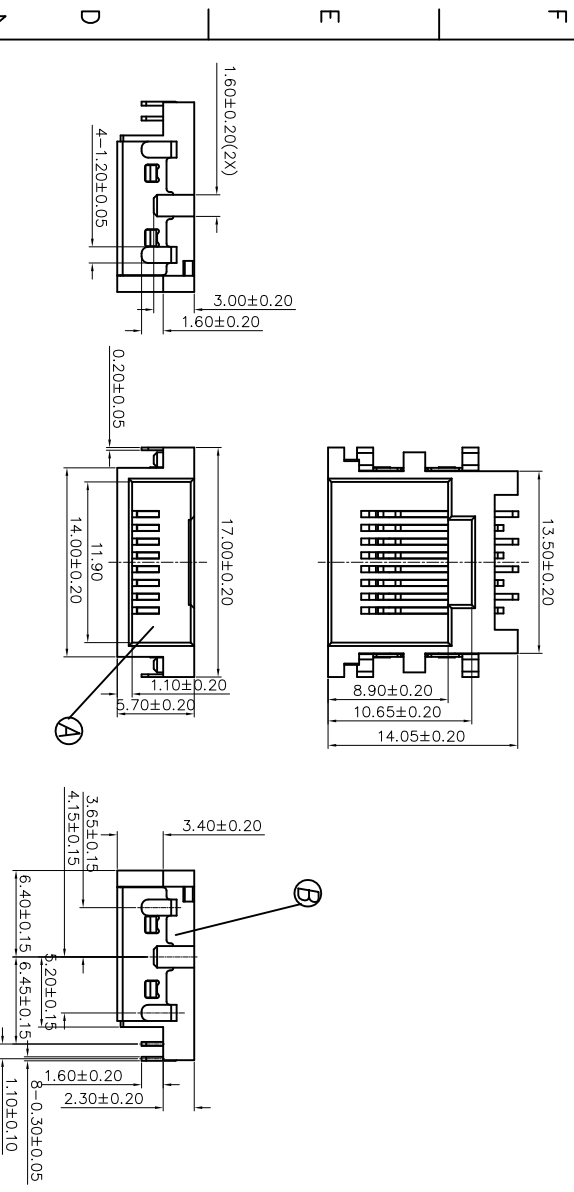

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm
RECOMMENDED PCB THICKNESS: 1.60±0.05

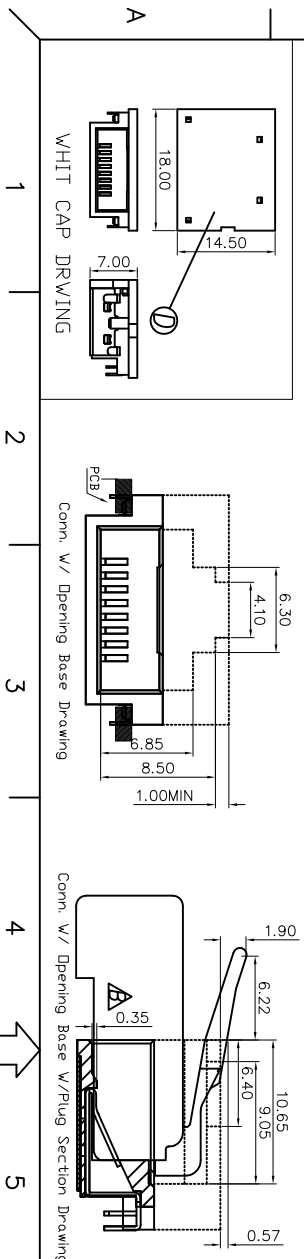

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
E	INK			BLACK COLOR
D	CAP	1	LCP UL 94V-0	BLACK COLOR
C	CONTACT	8	CS210-EH 0.3t	SEE PART NO.
B	SHELL	1	SUS 0.2t	NICKEL
A	HOUSING	1	PA10 UL 94V-0	BLACK COLOR

PART NO.
2RJ1724-000111F

SUFFIX: HALOGEN FREE

PACKAGE
1: TAPE & REEL
HOUSING COLOR
1: BLACK
CONTACT PLATING

1: GOLD FLASH ON CONTACT AREA,
TIN PLATING ON SOLDER AREA
NICKEL UNDERPLATED OVERALL

DECIMALS:	ANGLES:	TITLE	DATE	SCALE:	SHEET:	REV:
X : ±0.5	X : ±2°	RJ45 PHONE JACK , DIP TYPE		2.5:1	1 OF 1	B
XX : ±0.3	XX : ±1°					
XXX : ±0.2						