



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	EVEN	2021.10.22

LED ELECTRICAL CHARACTERISTIC			
NODE	COLOR	WAVELENGTH	
A1(-) A2(+)	AMBER	600-612nm	A1 A2
A1(+) A2(-)	GREEN	564-577nm	A1 A2
B1(-) B2(+)	AMBER	600-612nm	B1 B2

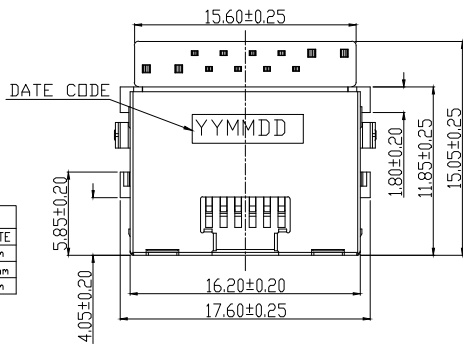

SPECIFICATIONS:





- VOLTAGE RATING: 150 VAC MAX.
- CURRENT RATING: 1.5 AMP MAX.
- INSULATION RESISTANCE: 500MΩ MIN. AT 500V DC
- DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC 60Hz 1 MINUTE.
- OPERATING TEMPERATURE: -30°C TO +70°C.
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- PACKAGE: SEE "2RJ1729-040211F" PACKAGE.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
- DURABILITY: 5000 CYCLES.
- OTHER GENERAL SPEC. TO REFER "2RJ1729-040211F SPEC".



PART NO.

2RJ1729-040211F

- SUFFIX: HALOGEN FREE
- PACKAGE: 1: TAPE & REEL
- HOUSING COLOR: 1: BLACK
- CONTACT PLATING: 2: 30u" GOLD ON CONTACT AREA, 80u" MIN. MATTE TIN PLATING ON SOLDER AREA, 30u" MIN. NICKEL UNDERPLATED OVERALL

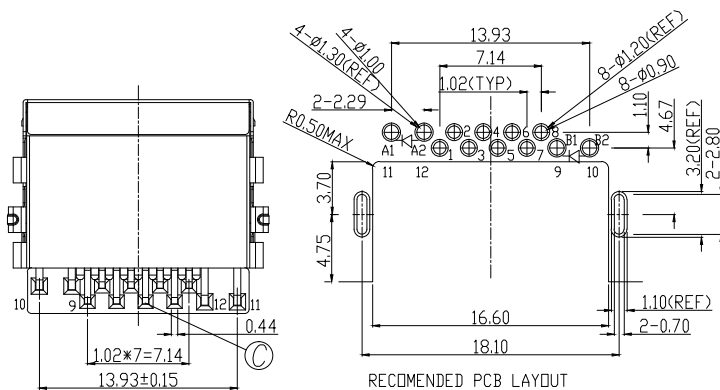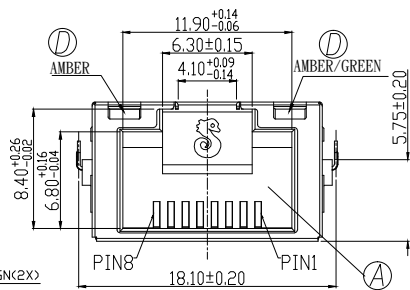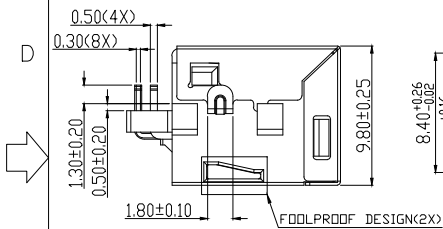

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm
RECOMMENDED PCB THICKNESS: 1.00±0.05

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
E	STOPPLE	2	LCP UL 94V-0	BLACK COLOR
D	LED	2	AMBER/AMBER, GREEN	TIN
C	CONTACT	8	C5210R 0.3t	SEE PART NO.
B	SHELL	1	SUS 0.2t	NICKEL 50u"
A	HOUSING	1	PA10 UL 94V-0	BLACK COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		信音科技(香港)有限公司			
DECIMALS:	ANGLES:	TITLE	RJ45 PHONE JACK		
X : ±0.5	X : ±2°	DWN	EVEN 2021.10.22	PART NO. 2RJ1729-040211F	
X.X : ±0.3	X.X : ±1°	CHKD		SCALE: 1:1	UNIT: mm
X.XX : ±0.2		APVD	ANGELA2021.10.22	SIZE: A3	SHEET: 1 OF 1 REV: A
CUSTOMER COPY					