

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	ECN NO.S180801-0-3	PAN	2018.09.10



- SPECIFICATIONS:**
- VOLTAGE RATING: 150 VAC MAX.
 - CURRENT RATING: 1.5 AMP MAX.
 - INSULATION RESISTANCE: 500M OHMS MIN. AT 500 VDC.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC 60Hz 1 MINUTE.
 - DURABILITY: 5000 CYCLES.
 - OPERATING TEMPERATURE: -30°C TO +70°C.
 - OTHER GENERAL SPEC. TO REFER "2RJ1733-010X11F SPEC".
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING.
 - PACKAGE: SEE "2RJ1733 SERIES" PACKAGE.
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.










PART NO.

2RJ1733-010111F

- SUFFIX: HALOGEN FREE
- PACKAGE I: TAPE AND REEL
- HOUSING COLOR I: BLACK
- CONTACT AREA PLATING I: GOLD FLASH ON CONTACT AREA, MATTE TIN PLATED ON SOLDER AREA, NICKEL UNDERPLATED OVERALL.

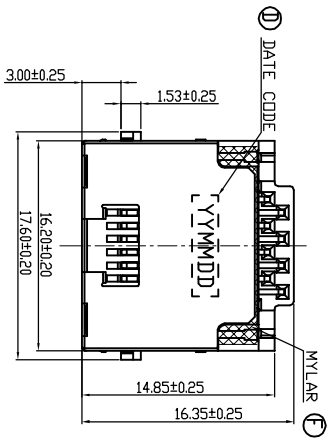

VIEW A SCALE 5:1

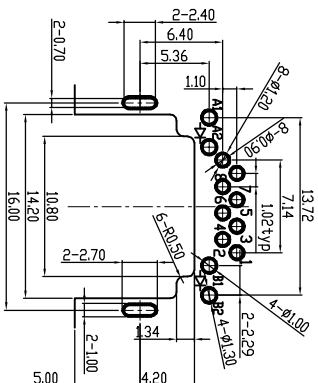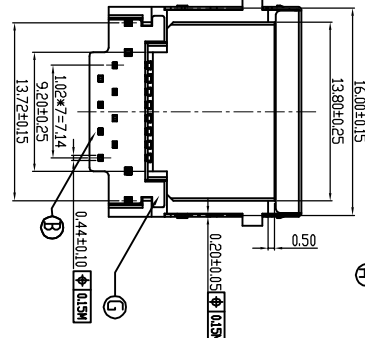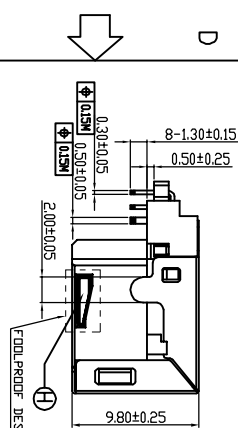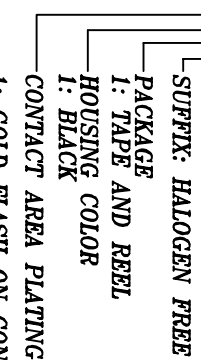

RECOMMENDED PCB LAYOUT
TOLERANCES UNLESS OTHERWISE SPECIFIED
RECOMMENDED PCB THICKNESS: 1.6mm

LED ELECTRICAL CHARACTERISTIC	
NODE	COLOR
A(+)	A2(-)
B(+)	B2(-)
A1	A2
B1	B2

H	STOPPLE	2	LCP UL 94V-0	BLACK
G	COVER	1	LCP UL 94V-0	BLACK
F	NYLAR	1		YELLOW
E	LED	2		WHITE/AMBER
D	INK			BLACK
C	SHIELD	1	SUS201	NICKEL
B	CONTACT	8	CS210	SEE PART NO.
A	HOUSING	1	PA10 UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

DECIMALS:	ANGLES:	TITLE	RA45 JACK, W/SHIELD, R/A, DIP TYPE, H=4.0mm
X : ±0.5	X : ±2°	DWN	PART NO. 2RJ1733-010111F
X.X : ±0.3	X.X : ±1°	CHKD	SCALE 3/1 UNIT: mm
X.XX : ±0.2		APVD	SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY