

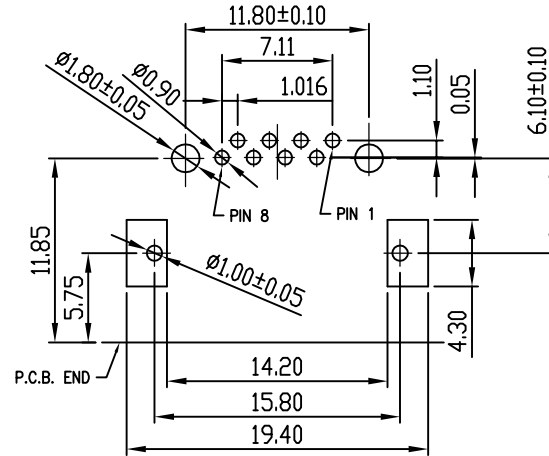





REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	IVY-C	2015.02.05

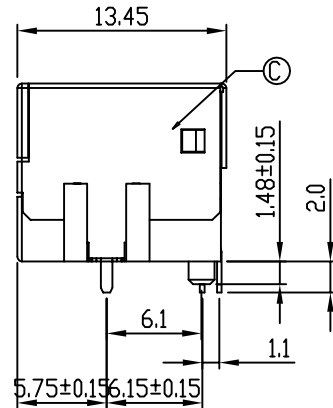

P.C.B. Layout (Top View)
TOLERANCE ± 0.05 FOR PCB=1.2-1.6

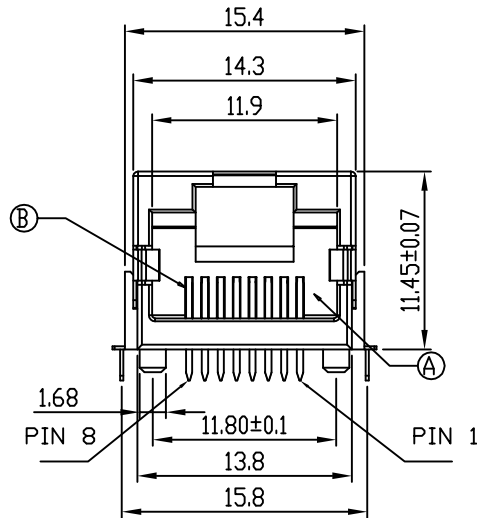

SPECIFICATIONS:

- VOLTAGE RATING: 150 VAC MAX.
- CURRENT RATING: 1.5 AMP MAX.
- INSULATION RESISTANCE: 1,000M OHMS MIN. AT 500 VDC.
- DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC 60Hz 1 MINUTE.
- DURABILITY: 5,000 CYCLES .
- OPERATING TEMPERATURE: -30°C TO +70°C.
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- PACKAGE: SEE "2RJ1734 SERIES" PACKAGE.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
- OTHER GENERAL SPEC. TO REFER "2RJ1734 SERIES SPEC".



PART NO.

2RJ1734-000111F

SUFFIX: HALOGEN FREE

PACKAGE

1: TAPE & REEL

HOUSING COLOR

1: BLACK

CONTACT AREA PLATING

**1: GOLD FLASH PLATING ON CONTACT AREA,
TIN PLATING ON SOLDER AREA.**

NICKEL UNDERPLATED OVERALL.

D	INK			BLACK
C	SHIELD	1	COPPER ALLOY	NICKEL PLATED
B	CONTACT	8	COPPER ALLOY	SEE PART NO.
A	HOUSING	1	LCP UL 94V-0	BLACK

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS:	ANGLES:	TITLE RJ45 JACK, R/A, W/LED, SMT&DIP TYPE ,H=11.45mm		
X :±0.5	X :±2°	DWN	NY-C 2015.02.05	PART NO. 2RJ1734-000111F
X.X :±0.3	X.X :±1°	CHKD	ANCELA 2015.02.05	SCALE N/A UNIT: mm
X.XX :±0.2		APVD	ANCELA 2015.02.05	SIZE: A3 SHEET: 1 OF 1 REV: A
CUSTOMER COPY				