


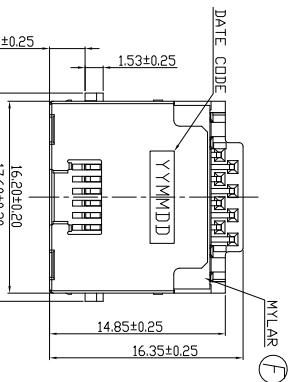




REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR	RELEASE	WY-C	2016.01.11

- SPECIFICATIONS:
- VOLTAGE RATING: 150 VAC MAX.
  - CURRENT RATING: 1.5 AMP MAX.
  - INSULATION RESISTANCE: 500MΩ MIN. AT 500V DC
  - DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC 60Hz 1 MINUTE.
  - OPERATING TEMPERATURE: -30°C TO +70°C.
  - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING.
  - PACKAGE: SEE "2R11756-000X11F" PACKAGE.
  - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
  - MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
  - DURABILITY: 5000 CYCLES.
  - OTHER GENERAL SPEC. TO REFER "2R11756-000X11F SPEC."




VIEW A SCALE 5:1



PART NO.  
2R11756-000X11F

- SUFFIX: HALOGEN FREE
- PACKAGE 1: TAPE & REEL
- HOUSING COLOR 1: BLACK
- CONTACT PLATING 1: GOLD FLASH ON CONTACT AREA
- 50U" MIN MATTE TIN PLATING ON SOLDER AREA
- 30U" MIN NICKEL UNDERPLATED OVERALL
- 2: 30U" GOLD ON CONTACT AREA
- 50U" MIN MATTE TIN PLATING ON SOLDER AREA
- 30U" MIN NICKEL UNDERPLATED OVERALL

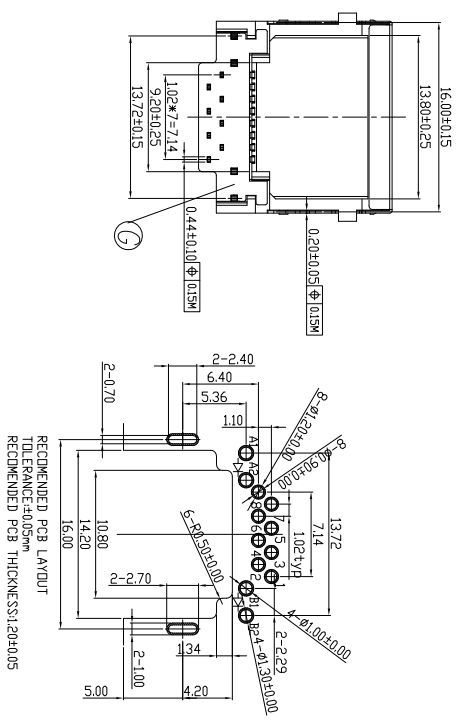

G	COVER	1	LCP UL 94V-0	BLACK COLOR
F	MYLAR	1		YELLOW
E	STOPPLE	2	LCP UL 94V-0	BLACK COLOR
D	LED	2		AMBER/GREEN
C	CONTACT	8	C5210	SEE PART NO.
B	SHELL	1	SUS 201	50U" NICKEL
A	HOUSING	1	PA10 UL 94V-0	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.  
信音企業股份有限公司

TITLE R445 PHONE JACK

DECIMALS:	ANGLES:	DWN	IN-C 2016.01.11	PART NO. 2R11756-000X11F	SCALE: 1:1	UNIT: mm	SHEET: 1 OF 1	REV: A
X : ±0.5	X : ±2°	CHKD	ANGEL2016.01.11					
X.X : ±0.3	X.X : ±1°	APVD	ANGEL2016.01.11					
X.XX : ±0.2								

CUSTOMER COPY

LED ELECTRICAL CHARACTERISTICS			
MODE	COLOR	WAVELENGTH	FORWARD CURRENT
AI(+)	AZ(-)	AI - AI - AZ	564-577nm
BI(+)	BZ(-)	BI - BI - BZ	584-594nm
			IF=20mA

