
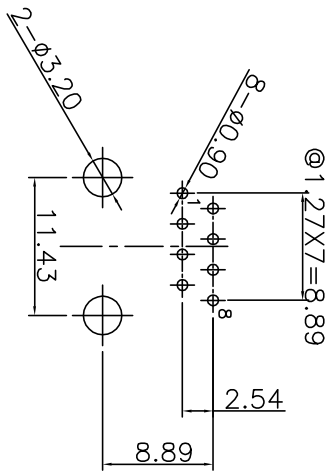
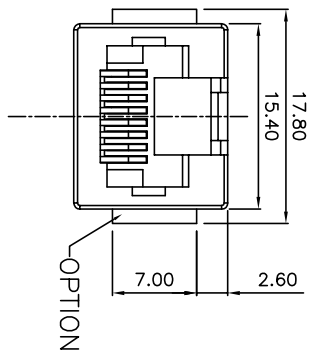
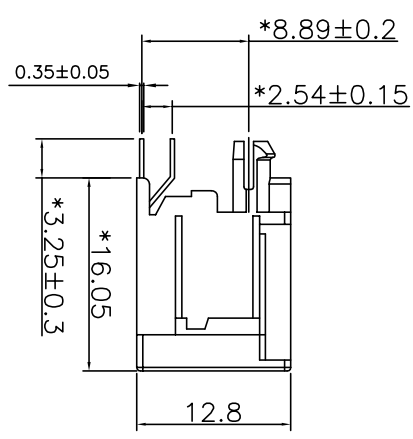


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A		PDR RELEASE	Even	2018.01.26

- SPECIFICATIONS:
- VOLTAGE RATING: 125 VAC MAX.
 - CURRENT RATING: 1.5 AMP MAX.
 - INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC
 - DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC 60Hz 1 MINUTE.
 - OPERATING TEMPERATURE: -40°C TO +85°C.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: [GR-PASS]
 - PACKAGE: SEE "2RJ1779-000111H" PACKAGE.
 - FOR WAVE SOLDERING LEAD-FREE PROCESS.
 - MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
 - DURABILITY: 750 CYCLES.
 - OTHER GENERAL SPEC. TO REFER "2RJ1779-000111H SPEC."

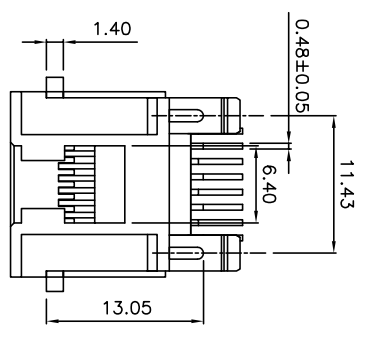

PC Board Layout
Component Side Shown

- PART NO.
2RJ1779-000111H
- SUFFIX: HALOGEN
 - PACKAGE: TRAY
 - HOUSING COLOR: BLACK
 - CONTACT PLATING: 1: GOLD FLASH ON CONTACT AREA, 100u"~200u" TIN PLATING ON SOLDER AREA, 30~80u" NICKEL UNDERPLATED OVER ALL

C	CONTACT	8	PHOSPHOR BRONZE	SEE PART NO.
B	COVER	1	FR52 UL 94V-0	BLACK COLOR
A	HOUSING	1	RF52 UL 94V-0	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信管企業股份有限公司				
TITLE: RJ45 PHONE JACK				
DWN: <u>[REV. 2018.01.26]</u> PART NO. 2RJ1779-000111H				
CHKD: <u>[REV. 2018.01.26]</u> SCALE: 1:1 UNIT: mm				
APVD: <u>[REV. 2018.01.26]</u> SIZE: A3 SHEET: 1 OF 1 RBV: A				

CUSTOMER COPY