
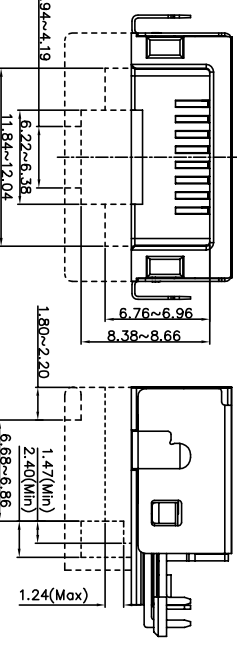
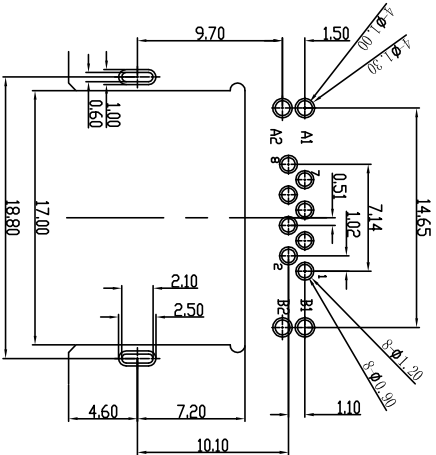
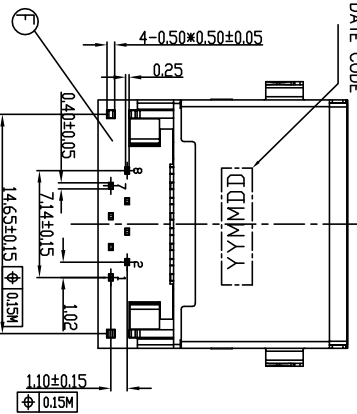
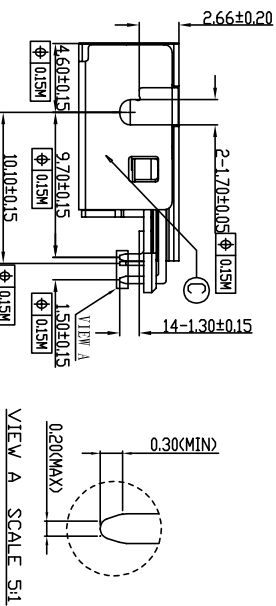


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	Even	2018.06.22

- FOOLPROOF DESIGN (2x) (E)
- SPECIFICATIONS:
- VOLTAGE RATING: 150 VAC MAX.
 - CURRENT RATING: 1.5 AMP MAX.
 - INSULATION RESISTANCE: 500M OHMS MIN. AT 500 VDC.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC 60Hz 1 MINUTE.
 - DURABILITY: 5000 CYCLES.
 - OPERATING TEMPERATURE: -30°C TO +70°C.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING.
 - PACKAGE: SEE "2RJ1792-000111F" PACKAGE.
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
 - OTHER GENERAL SPEC. TO REFER "2RJ1792-000111F SPEC".

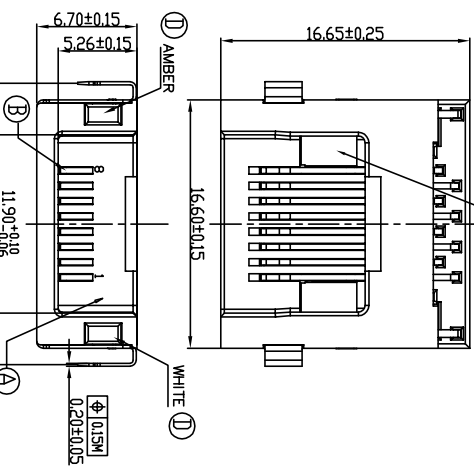

NODE	COLOR	A1-A2
A1(+)	A2(-)	AMBER
B1(+)	B2(-)	WHITE

PART NO.

2RJ1792-000111F

SUPPLY: HALOGEN FREE
PACKAGE 1: TAPE & REEL
HOUSING COLOR 1: BLACK

CONTACT AREA PLATING
1: GOLD FLASH ON CONTACT AREA.
MATTÉ TIN 50μ" MIN ON SOLDER AREA.
50μ" MIN NICKEL UNDERPLATED OVERALL.

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
F	CAP	1	LCP UL 94V-0	BLACK
E	DEFEND	2	LCP UL 94V-0	BLACK
D	LED	2	WHITE/AMBER	TIN
C	SHIELD	1	SUS201	50μ" NICKEL PLATED
B	CONTACT	8	CS210R-EH	SEE PART NO.
A	HOUSING	1	PA10T UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X : ±0.5 X : ±.2
X.X : ±0.3 X.X : ±.1
X.XX : ±0.2

TITLE: R44S JACK, R/A W/LED, DIP TYPE

DATE: 2018.06.22 PART NO. 2RJ1792-000111F

SCALE: 3/1 UNIT: mm

SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY

Singatron Enterprise Co., Ltd.
信音企業股份有限公司