



REV. ECN NO. OR DESCRIPTION	REVISED	DATE
A PDR RELEASE	Even	2018.08.15

- SPECIFICATIONS:
- VOLTAGE RATING: 150 VAC MAX.
 - CURRENT RATING: 1.5 AMP MAX.
 - INSULATION RESISTANCE: 500M OHMS MIN. AT 500 VDC.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC 60Hz 1 MINUTE.
 - DURABILITY: 5000 CYCLES.
 - OPERATING TEMPERATURE: -30°C TO +70°C.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 - PACKAGE: SEE "2R11792-001111F" PACKAGE.
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
 - OTHER GENERAL SPEC. TO REFER "2R11792-001111F SPEC".



PART NO.
2R11792-001111F

- SUFFIX: HALOGEN FREE
- PACKAGE I: TAPE & REEL
- HOUSING COLOR I: BLACK
- CONTACT AREA PLATING I: GOLD FLASH ON CONTACT AREA, MATTE TIN 50u" MIN ON SOLDER AREA, 50u" MIN NICKEL UNDERPLATED OVERALL.

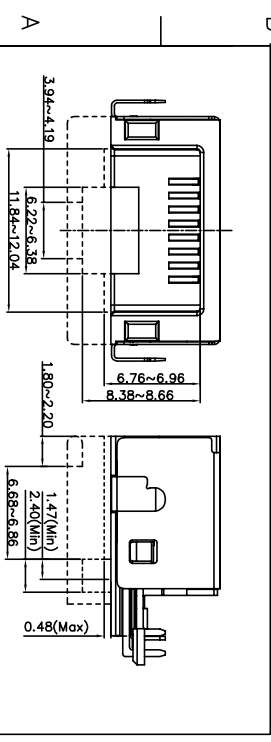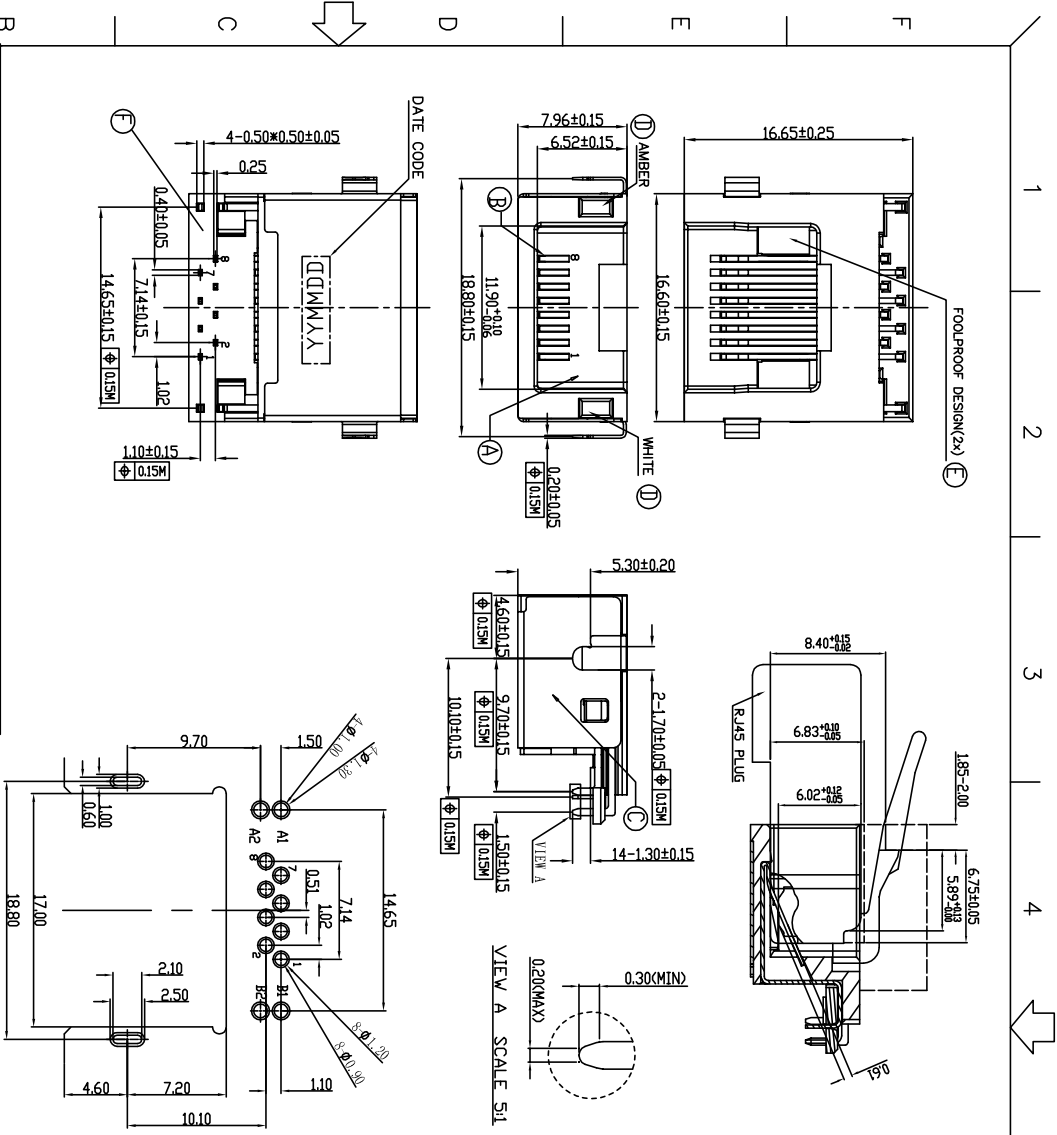

NODE	COLOR	
A1(+)	AMBER	A1-#-A2
B1(+)	WHITE	B1-#-B2

RECOMMENDED PCB LAYOUT
TOP VIEW: TOL: ±0.05mm

Conn. w/ Opening Base Drawing

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
F	CAP	1	LCP UL 94V-0	BLACK
E	DEFEND	2	LCP UL 94V-0	BLACK
D	LED	2	WHITE/AMBER	TIN
C	SHIELD	1	SUS201	50u" NICKEL PLATED
B	CONTACT	8	C5210R-EH	SEE PART NO.
A	HOUSING	1	PA10T UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X : ±0.5 X : ±1.2

X.X : ±0.3 X.X : ±1.1

X:XX : ±0.2

TITLE R44 JACK R/A W/LED, DIP TYPE

DWN PER 2018.08.15 PART NO. 2R11792-001111F

CHKD SCALE 3/1 UNIT: mm

APVD AMBZL2018.08.15 SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY



Singatron Enterprise Co., Ltd.
信音企業股份有限公司