





REV. ECN NO. OR DESCRIPTION	REVISED	DATE
A PDR RELEASE	Even	2021.01.27

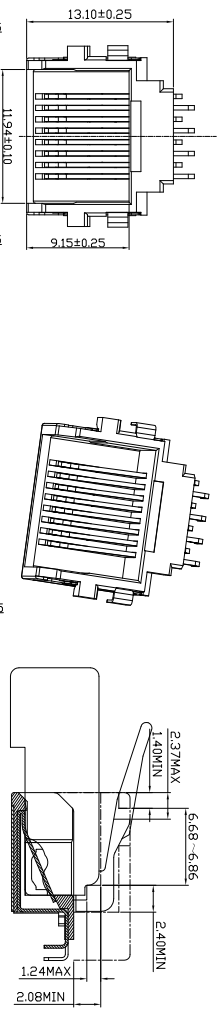



PLUG 装配示意图

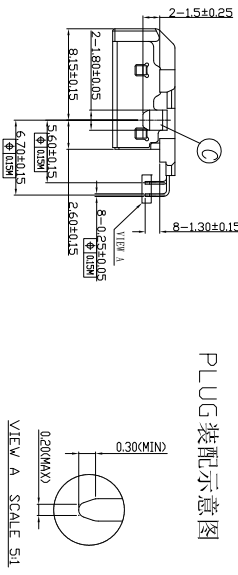

VIEW A SCALE 5:1

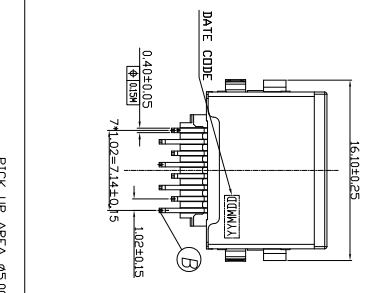

RECOMMENDED PCB LAYOUT TOLERANCE:±0.05mm

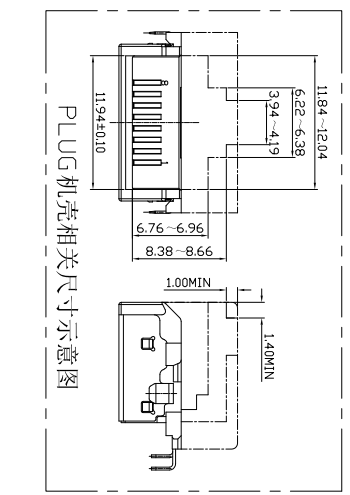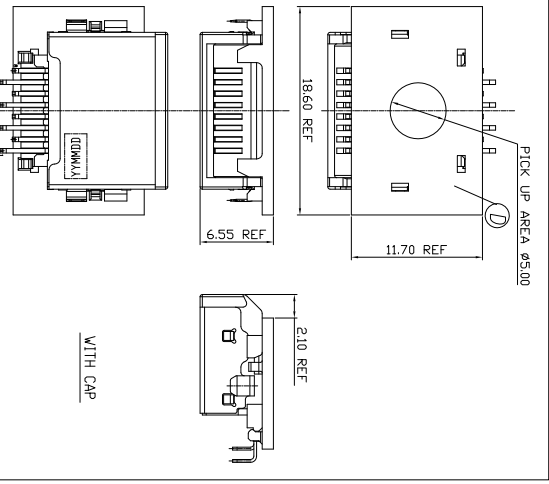

- SPECIFICATIONS:
- VOLTAGE RATING: 150 VAC MAX.
  - CURRENT RATING: 1.5 AMP MAX.
  - INSULATION RESISTANCE: 1000M OHMS MIN. AT 500 VDC.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC 60Hz 1 MINUTE.
  - DURABILITY: 5000 CYCLES
  - OPERATING TEMPERATURE: -30°C TO +70°C.
  - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING.
  - PACKAGE: SEE "2RJ1818-001111F" PACKAGE.
  - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
  - MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
  - OTHER GENERAL SPEC. TO REFER "2RJ1818-001111F SPEC".



PART NO.  
2RJ1818-001111F

SUFFIX: HALOGEN FREE  
PACKAGE  
1: TAPE & REEL  
HOUSING COLOR  
1: BLACK  
CONTACT AREA PLATING  
1: GOLD FLASH PLATING ON CONTACT AREA,  
50u" MIN.MATTE TIN PLATING ON SOLDER AREA.  
50u" MIN.NICKEL UNDERPLATED OVERALL.

D	CAP	1	LCP UL 94V-0	BLACK
C	SHIELD	1	SUS201	50u" MIN.NICKEL
B	CONTACT	8	C5210	SEE PART NO.
A	HOUSING	1	PA10T UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
XX	:±0.3	X.X	:±1°	
XXX	:±0.2			
TITLE R45 JACK, R/A SINKING, DIP TYPE				
DWG ENH 2021.01.27 PART NO. 2RJ1818-001111F				
CHKD SCALE 3/1 UNIT: mm				
APVD ANGE1A2021.01.27 SIZE: A3 SHEET:1 OF 1 REV:A				
CUSTOMER COPY				

